

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# KAESER 8115013

#### Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA020747		
Sample Date		Client Info		02 Jul 2024		
Machine Age	hrs	Client Info		2697		
Oil Age	hrs	Client Info		450		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	24		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	69		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	<1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	23500	20347		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		13		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.043		
ppm Water	ppm	ASTM D6304	>500	440		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3766		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<b>119</b>		
Particles >21µm		ASTM D7647		24		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>19/18/14</b>		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.37		




Built for a lifetime."

# **OIL ANALYSIS REPORT**





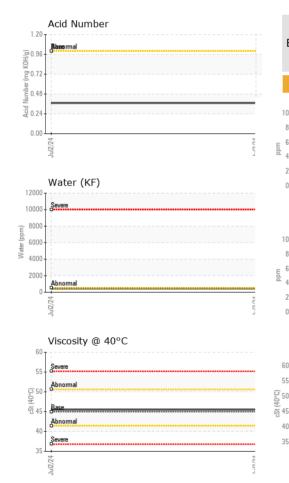

VISUAL		method	limit/base	current	history1	histor
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history1	histo
Visc @ 40°C	cSt	ASTM D445	45	45.5		
SAMPLE IMAGE	ES	method	limit/base	current	history1	histo
Color					no image	no ima
Bottom					no image	no ima
GRAPHS Ferrous Alloys			491,520			
Ferrous Alloys			122,880	) -		
Ferrous Alloys				) -		
Ferrous Alloys			122,880 30,720 7,680			
Ferrous Alloys			122,880 30,720 7,680			
Ferrous Alloys	als		122,880 30,720 7,680			
Ferrous Alloys	als		122,880 30,720 7,680			
Ferrous Alloys	als		122,880 30,720 7,680			
Ferrous Alloys	als		122.880 30.720 7.680 472000 472000 480 50			
Ferrous Alloys	als		122,880 30,720 7,680 100 100 100 100 100 100 100 100 100 1			
Ferrous Alloys	als		122.880 30.720 7.680 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.80000 7.80000 7.80000000000			
Ferrous Alloys	als		122.880 30.720 7.680 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.8000 7.80000 7.80000 7.80000000000	b b b b b b c b c b c c c c c c c c c c		
Ferrous Alloys			122.880 30.720 7,680 7,680 7,680 7,680 7,680 7,680 1,920 9,900 1,920 1,9	<b>Bibreemal</b>	14μ 21μ	38μ
Ferrous Alloys			122,880 30,720 7,680 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,00000000	Acid Number		38μ
Ferrous Alloys			122,880 30,720 7,680 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,00000000	Acid Number		38µ
Ferrous Alloys			122,880 30,720 7,680 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,00000000	Acid Number		38μ
Ferrous Alloys			122,880 30,720 7,680 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,00000000	Acid Number		38µ
Ferrous Alloys			122,880 30,720 7,680 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,0000 10,00000000	Acid Number		38µ
Ferrous Alloys			122,880 30,720 7,680 400 400 400 400 400 400 400 400 400 4	Acid Number		38μ



Certificate 12367

Test Package : IND 2 ( Additional Tests: KF, PrtCount )

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

> Contact/Location: Service Manager - AMAROCIL Page 2 of 2

Contact: Service Manager

T:

F: