


# **OIL ANALYSIS REPORT**

Sample Rating Trend

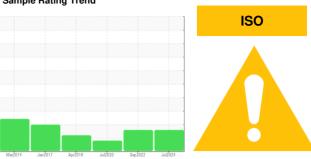

Machine Id

# KAESER AS25T 4584641 (S/N 1171)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Mar2014	Jan2017 Apr2018	Jul2020 Sep 2022	Jul2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP54716	KCP49231	KCP11784
Sample Date		Client Info		08 Jul 2024	26 Sep 2022	16 Jul 2020
Machine Age	hrs	Client Info		29137	24246	18203
Oil Age	hrs	Client Info		2757	3100	2700
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	11	8
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	<1	6	11
Calcium	ppm	ASTM D5185m	0	<1	0	0
Phosphorus	ppm	ASTM D5185m	0	2	<1	2
Zinc	ppm	ASTM D5185m	0	12	27	38
Sulfur	ppm	ASTM D5185m	23500	20471	21723	26600
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	3	3
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304	>0.05	0.015	0.007	0.012
ppm Water	ppm	ASTM D6304	>500	153	79.1	121.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		27139	10166	3803
Particles >6µm		ASTM D7647	>1300	<b>10830</b>	▲ 3065	1473
Particles >14μm		ASTM D7647	>80	<b>1064</b>	<u> </u>	<b>139</b>
Particles >21µm		ASTM D7647	>20	<b>^</b> 206	<b>4</b> 2	24
Particles >38µm		ASTM D7647	>4	3	2	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/21/17</u>	<u>\$\text{\Delta}\$ 21/19/15</u>	18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.38



## OIL ANALYSIS REPORT

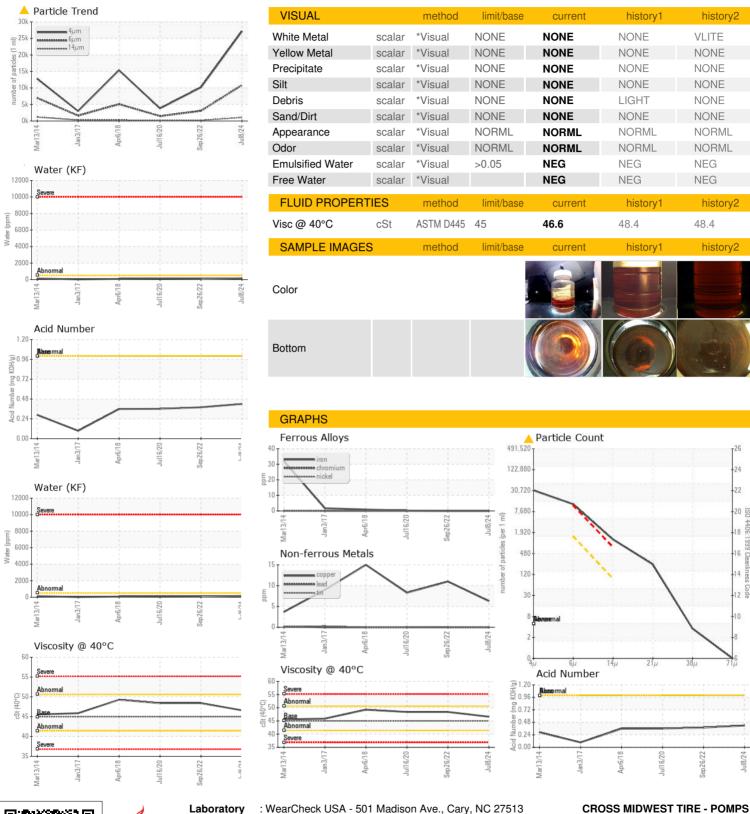





Certificate 12367

Laboratory Sample No.

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCP54716

: 06234951 Unique Number : 11123785

Received : 12 Jul 2024 **Tested** : 15 Jul 2024 Diagnosed : 15 Jul 2024 - Doug Bogart

Test Package : IND 2 ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

5320 N HWY 763 COLUMBIA, MO

US 65202 Contact:

T:

F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)