

### **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# KAESER 8613174

#### Component Compressor Fluid KAESER SIGMA (OEM) FG-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination


There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA020001	KCA000917	
Sample Date		Client Info		25 Jun 2024	22 Sep 2023	
Machine Age	hrs	Client Info		6200	2850	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Changed	N/A	
Sample Status				ATTENTION	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm		>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m		0	0	
Silver		ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m		0 <1	<1	
	ppm					
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		4	9	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	7	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		<1	47	
Calcium	ppm	ASTM D5185m		1	2	
Phosphorus	ppm	ASTM D5185m	500	132	<1	
Zinc	ppm	ASTM D5185m		96	8	
Sulfur	ppm	ASTM D5185m		6106	19631	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		2	12	
Potassium	ppm	ASTM D5185m	>20	0	6	
Water	%	ASTM D6304	>0.05	0.005	0.015	
ppm Water	ppm	ASTM D6304	>500	52	153.5	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4411	10733	
Particles >6µm		ASTM D7647	>1300	1190	▲ 5967	
Particles >14µm		ASTM D7647	>80	<mark> </mark> 85	<b>4</b> 61	
Particles >21µm		ASTM D7647	>20	<b>2</b> 3	931	
Particles >38µm		ASTM D7647	>4	1	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>—</b> 19/17/14	<b>A</b> 21/20/16	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.42	0.30	

Contact/Location: TERRY MILES - PACLANPA Page 1 of 2

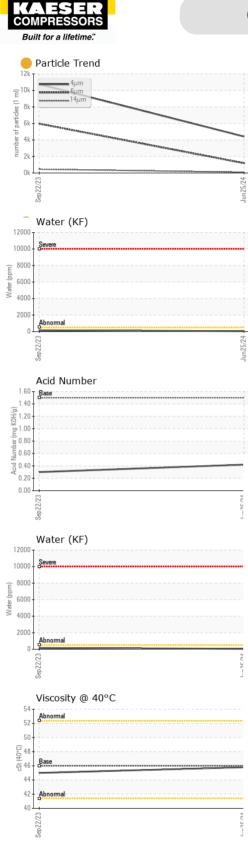

## **OIL ANALYSIS REPORT**

		method	limit/base	current	history1	history
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance Odor	scalar	*Visual	NORML	NORML	NORML	
	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history
Visc @ 40°C	cSt	ASTM D445	46	45.8	45.0	
SAMPLE IMAGE	S	method	limit/base	current	history1	history
Color						no image
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Count	t	
10 iron			491,520	1		
chromium			122,880	-		
			30,720			
2			30,720	Ī		
0	1		7,680			
Sep 22/23			Jun25/24 \$ (per 1 ml)	N .		
Sep			nn les (be			
Non-ferrous Meta	ls		10 480			
10 copper						
o announce lead						
			30			-
2				<b>Berme</b> mal		-
		**********		Ī		
۱. Sep 22/23			Jun25/24	1		
			n (	4μ 6μ	14µ 21µ	38µ 71
Viscosity @ 40°C				Acid Number	- 1P	
Abnormal				Pres		
ç 50-			및 1.50 말	Base		
50 9 8 8 45			(B) 1.50 B) 1.50 B) 1.00 B) 1.			
Abnormal			L 0.50			
40			Jun25/24	Sep 22/23		
			5	2		

回议

51

Contact/Location: TERRY MILES - PACLANPA