




OIL ANALYSIS REPORT

Sample Rating Trend

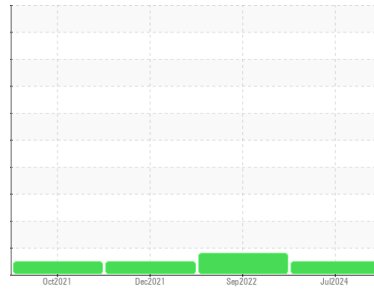

NORMAL



Machine Id
TORO 3500-G-1 15572 (S/N 404766066)
 Component
Left Gasoline Engine
 Fluid
TRC PRO-SPEC IV XP SYN BLEND SAE 10W30 (4 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TR06235152	TR05652803	TR05433759
Sample Date	Client Info			10 Jul 2024	20 Sep 2022	09 Dec 2021
Machine Age	hrs	Client Info		1420	648	440
Oil Age	hrs	Client Info		220	448	240
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	12	47	22
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	4	4	2
Lead	ppm	ASTM D5185m	>50	12	▲ 145	1
Copper	ppm	ASTM D5185m	>155	3	10	4
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		12	0	2
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		109	102	69
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		52	50	42
Calcium	ppm	ASTM D5185m		3976	3882	2279
Phosphorus	ppm	ASTM D5185m		918	710	461
Zinc	ppm	ASTM D5185m		1113	900	580
Sulfur	ppm	ASTM D5185m		5024	4296	3144

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	10	13	11
Sodium	ppm	ASTM D5185m	>400	12	30	30
Potassium	ppm	ASTM D5185m	>20	3	0	2


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	14.3	20.1	14.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.8	35.8	28.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.1	33.6	23.1
Base Number (BN)	mg KOH/g	ASTM D2896		9.34	8.02	8.18




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

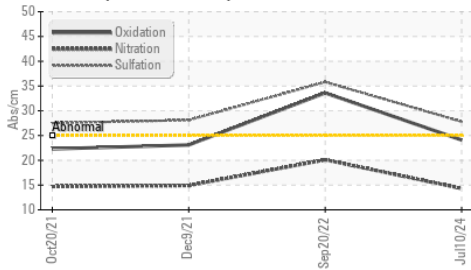

Base Number

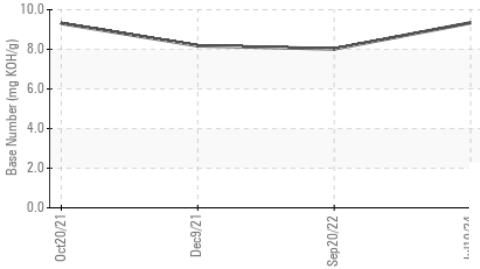

Viscosity @ 100°C

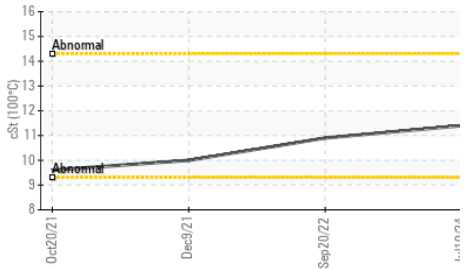


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.4	10.9	10.0

GRAPHS


Iron (ppm)

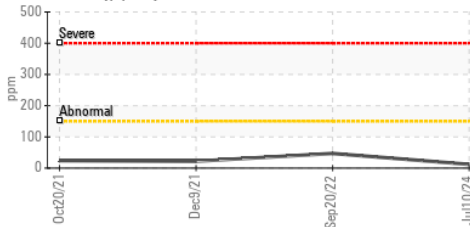


Lead (ppm)

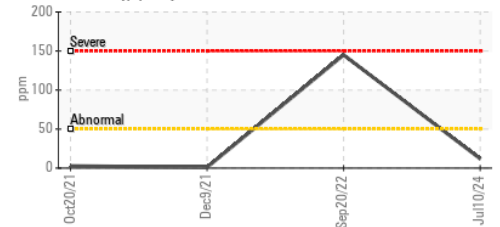


Aluminum (ppm)

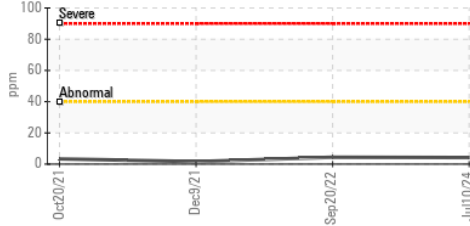


Chromium (ppm)

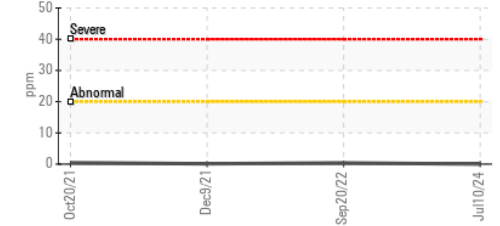


Copper (ppm)

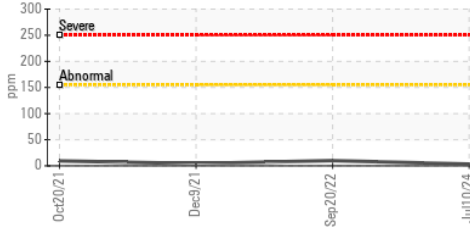


Silicon (ppm)

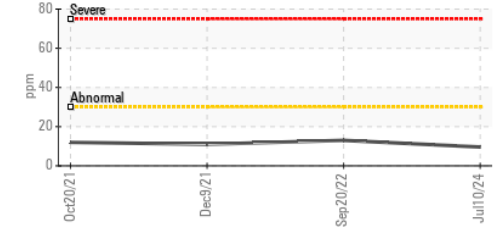

Viscosity @ 100°C

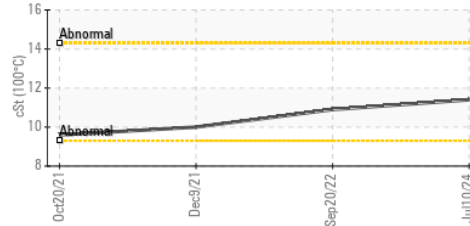

Base Number

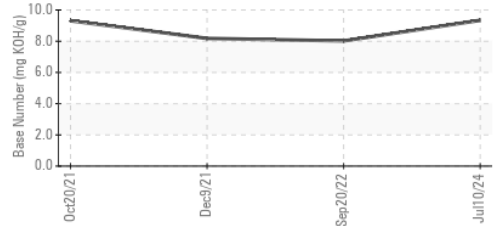

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR06235152

Lab Number : 06235152

Unique Number : 11123986

Test Package : MOB 2

Received : 12 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Sean Felton

CITY PARK GOLF COURSE

3201 E 23RD AVE

DENVER, CO

US 80205

Contact: COLIN MURPHY

Colin.murphy@denvergov.org

T:

F:

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)