




OIL ANALYSIS REPORT

Sample Rating Trend

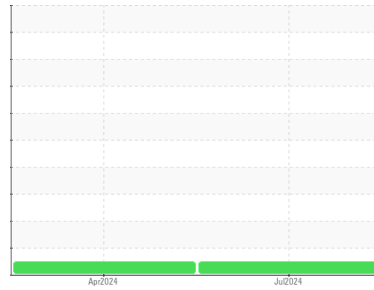

NORMAL



Machine Id
VOLVO A30G 340072
 Component
Front Axle
 Fluid
GEAR OIL SAE 80W140 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0946541	ML0000987	---
Sample Date	Client Info		11 Jul 2024	22 Apr 2024	---
Machine Age	hrs	Client Info	11600	11356	---
Oil Age	hrs	Client Info	0	11356	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >900	46	37	---
Chromium	ppm	ASTM D5185m >20	<1	0	---
Nickel	ppm	ASTM D5185m >10	<1	0	---
Titanium	ppm	ASTM D5185m	<1	0	---
Silver	ppm	ASTM D5185m	<1	0	---
Aluminum	ppm	ASTM D5185m >30	3	0	---
Lead	ppm	ASTM D5185m >50	0	0	---
Copper	ppm	ASTM D5185m >150	3	0	---
Tin	ppm	ASTM D5185m >20	<1	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	190	168	---
Barium	ppm	ASTM D5185m 200	<1	0	---
Molybdenum	ppm	ASTM D5185m 12	1	0	---
Manganese	ppm	ASTM D5185m	<1	<1	---
Magnesium	ppm	ASTM D5185m 12	14	12	---
Calcium	ppm	ASTM D5185m 150	84	84	---
Phosphorus	ppm	ASTM D5185m 1650	1273	1008	---
Zinc	ppm	ASTM D5185m 125	61	42	---
Sulfur	ppm	ASTM D5185m 22500	33373	32678	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	4	3	---
Sodium	ppm	ASTM D5185m	0	0	---
Potassium	ppm	ASTM D5185m >20	2	<1	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	LIGHT	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---

OIL ANALYSIS REPORT



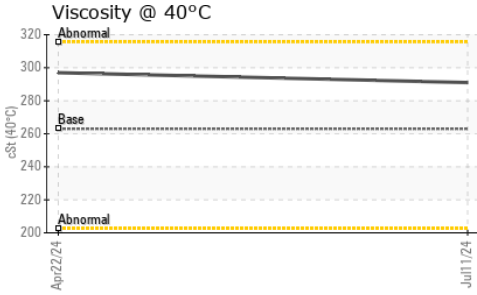


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 263	291	297	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

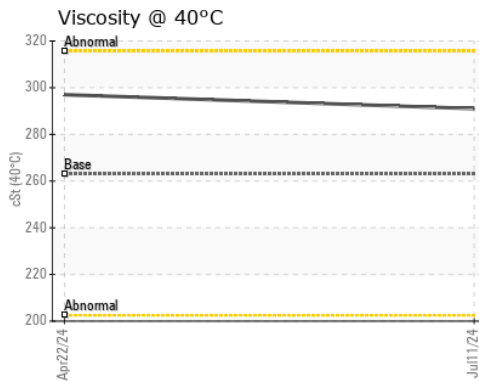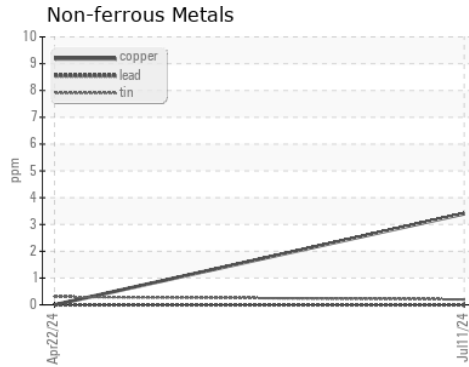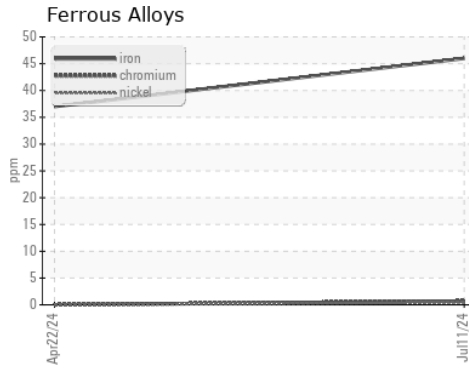

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ML0946541

Lab Number : 06235260

Unique Number : 11124094

Test Package : CONST

Received : 12 Jul 2024

Tested : 15 Jul 2024

Diagnosed : 15 Jul 2024 - Sean Felton

WILLIAM HAZEL

PO BOX 600

CHANTILLY, VA

US 20153

Contact: SERVICE MANAGER

jimmy_elswick@wahazel.com

T: (703)378-8300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)