

## **OIL ANALYSIS REPORT**

Area [PMOAS2873368] 7YR02754

Diesel Engine Fluid DIESEL ENGINE OIL SAE 40 (--- QTS)

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



Sample Rating Trend

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		DC0035075		
Sample Date		Client Info		13 Mar 2024		
Machine Age	hrs	Client Info		564		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<1		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	0		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	15		
Barium	ppm	ASTM D5185m	10	0		
Molybdenum	ppm	ASTM D5185m	100	15		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	450	75		
Calcium	ppm	ASTM D5185m	3000	2369		
Phosphorus	ppm	ASTM D5185m	1150	970		
Zinc	ppm	ASTM D5185m	1350	1117		
Sulfur	ppm	ASTM D5185m	4250	4464		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3		
Sodium	ppm	ASTM D5185m	>216	2		
Potassium	ppm	ASTM D5185m	>20	<1		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0		
Nitration	Abs/cm	*ASTM D7624	>20	5.4		
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.7		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.6		
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.0		



3

30

25

Abs/cm

10

14

0.212.0 0.0 KOH/g) 0.8 Base Number (mg KOH/g) 0.9 CON KOH/g)

2.0

0.0

18


16 cSt (100°C) Ba

Abnormal

Mar13/24

Mar13/24

# **OIL ANALYSIS REPORT**

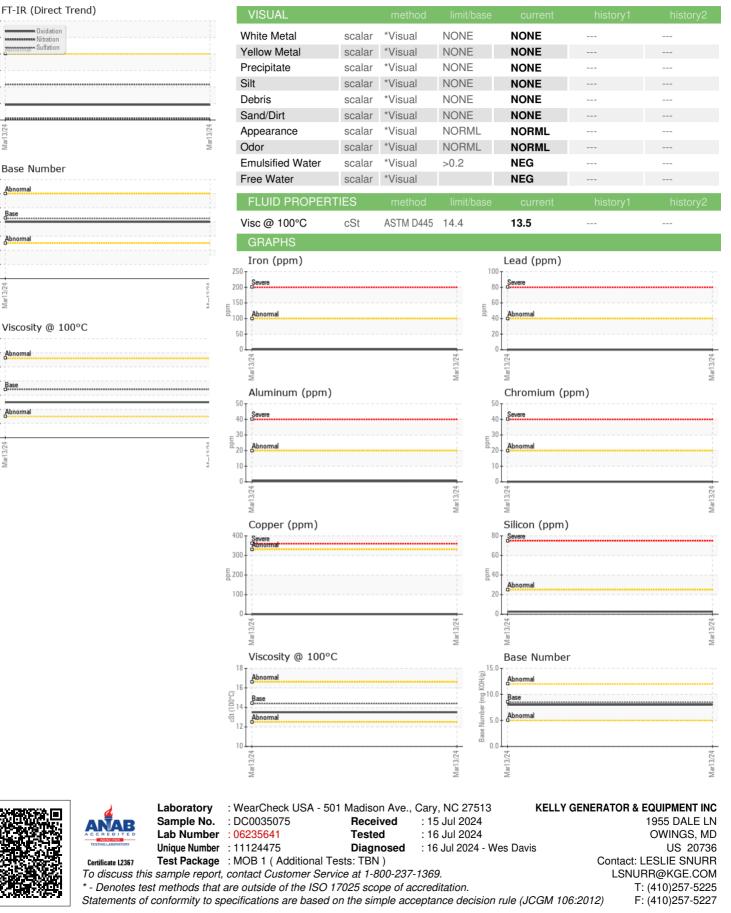

Contact/Location: LESLIE SNURR - KELOWI