


# **OIL ANALYSIS REPORT**



OKLAHOMA/102/EG - ROLLER/COMPACTOR 63.04 [OKLAHOMA^102^EG - ROLLER/COMPACTOR]

**Diesel Engine** 

MOBIL DELVAC 1300 SUPER15W40 (--- GAL)





## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the


# **Fluid Condition**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2			
Sample Number		Client Info		WC0945531	WC0935206	WC0819928			
Sample Date		Client Info		03 Jul 2024	26 Apr 2024	03 Nov 2023			
Machine Age	hrs	Client Info		8700	8400	8051			
Oil Age	hrs	Client Info		300	320	0			
Oil Changed		Client Info		Changed	Changed	N/A			
Sample Status				NORMAL	NORMAL	NORMAL			
CONTAMINATION	١	method	limit/base	current	history1	history2			
Fuel		WC Method	>5	<1.0	<1.0	<1.0			
Water		WC Method	>0.2	NEG	NEG	NEG			
Glycol		WC Method		NEG	NEG	NEG			
WEAR METALS		method	limit/base	current	history1	history2			
Iron	ppm	ASTM D5185m	>100	17	13	10			
Chromium	ppm	ASTM D5185m	>20	0	<1	<1			
Nickel	ppm	ASTM D5185m	>2	0	0	<1			
Titanium	ppm	ASTM D5185m	>2	0	<1	<1			
Silver	ppm	ASTM D5185m	>2	0	0	<1			
Aluminum	ppm	ASTM D5185m	>25	۰ <1	2	2			
Lead		ASTM D5185m	>40	0	1	1			
	ppm								
Copper	ppm		>330	2	3	2			
Tin	ppm	ASTM D5185m	>15	0	1	<1			
Vanadium	ppm	ASTM D5185m		0	<1	0			
Cadmium	ppm	ASTM D5185m		0	<1	<1			
ADDITIVES		method	limit/base	current	history1	history2			
Boron	ppm	ASTM D5185m	0	45	69	53			
Barium	ppm	ASTM D5185m	0	0	2	0			
Molybdenum	ppm	ASTM D5185m	0	38	42	42			
Manganese	ppm	ASTM D5185m		<1	<1	<1			
Magnesium	ppm	ASTM D5185m	0	479	478	486			
Calcium	ppm	ASTM D5185m		1730	1607	1650			
Phosphorus	ppm	ASTM D5185m		748	785	729			
Zinc .	ppm	ASTM D5185m		860	877	879			
Sulfur	ppm	ASTM D5185m		2769	2663	2582			
CONTAMINANTS		method	limit/base	current	history1	history2			
Silicon	ppm	ASTM D5185m	>25	3	5	4			
Sodium	ppm	ASTM D5185m		3	0	0			
Potassium	ppm	ASTM D5185m	>20	0	2	2			
INFRA-RED		method	limit/base	current	history1	history2			
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.3			
Nitration	Abs/cm	*ASTM D7624	>20	6.9	7.0	6.3			
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	22.0	21.8			
FLUID DEGRADATION method limit/base current history1 history2									
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	19.8	19.2			
Base Number (BN)	mg KOH/g	ASTM D2896			9.5	9.4			
Dase Mulliber (DIN)	illy NOR/g	49 LINI D5030	3.4	9.4	9.5	5.4			




# **OIL ANALYSIS REPORT**









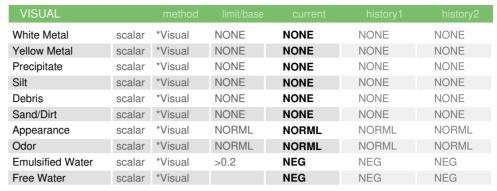



FLUID PROPERTIES		method				history2	
Visc @ 100°C	cSt	ASTM D445	14	12.5	12.2	12.4	

## **GRAPHS**













Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0945531 Lab Number : 06235720

Received **Tested** 

: 15 Jul 2024 : 16 Jul 2024

SHERWOOD CONSTRUCTION CO INC 3219 WEST MAY ST WICHITA, KS US 67213

Unique Number : 11124554 Diagnosed : 16 Jul 2024 - Wes Davis Test Package : CONST ( Additional Tests: TBN ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: DOUG KING doug.king@sherwood.net T: (316)617-3161 F: x: