


OIL ANALYSIS REPORT

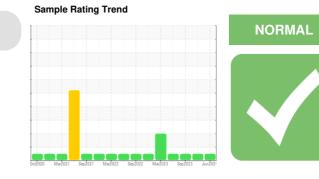

Machine Id B65019 - N SIDE SOUTH HOEGGER (S/N 17-168/2018) Hydraulic System

PETRO CANADA PURITY FG AW HYDRAULIC 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		WC0717129	WC0781468	WC0838765		
Sample Date		Client Info		30 Jun 2024	28 Mar 2024	25 Sep 2023		
Machine Age	hrs	Client Info		27661	26476	1882		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	Not Changd	Not Changd		
Sample Status				NORMAL	NORMAL	NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2		
Water		WC Method	>0.05	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	<1	0	2		
Chromium	ppm	ASTM D5185m	>20	1	<1	2		
Nickel	ppm	ASTM D5185m	>20	<1	<1	0		
Titanium	ppm	ASTM D5185m		<1	0	0		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>20	2	0	0		
Lead	ppm	ASTM D5185m	>20	<1	0	0		
Copper	ppm	ASTM D5185m	>20	1	0	<1		
Tin	ppm	ASTM D5185m	>20	0	<1	0		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		<1	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		<1	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m		1	<1	<1		
Calcium	ppm	ASTM D5185m		0	3	<1		
Phosphorus	ppm	ASTM D5185m		374	402	463		
Zinc	ppm	ASTM D5185m		7	6	15		
Sulfur	ppm	ASTM D5185m		448	714	851		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	1	<1	1		
Sodium	ppm	ASTM D5185m		<1	<1	0		
Potassium	ppm	ASTM D5185m	>20	2	<1	<1		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>5000	3028	1931	1910		
Particles >6µm		ASTM D7647	>1300	877	609	557		
Particles >14µm		ASTM D7647	>160	71	51	39		
Particles >21µm		ASTM D7647	>40	17	12	7		
Particles >38µm		ASTM D7647	>10	1	0	0		
Particles >71µm		ASTM D7647	>3	1	0	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/13	18/16/13	18/16/12		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.26	0.13	0.18	0.17		
5:15:52) Rev: 1				Submitted By: JASON MCDONALD				


Report Id: HORWIC [WUSCAR] 06235892 (Generated: 07/16/2024 15:15:52) Rev: 1


Page 1 of 2




OIL ANALYSIS REPORT

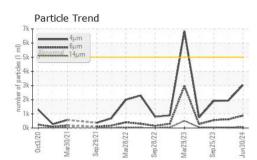


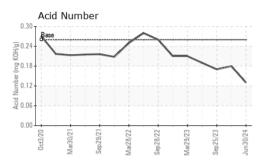






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
						This to I y Z
Visc @ 40°C	cSt	ASTM D445	45.36	50.1	48.5	48.6
	cSt					
Visc @ 40°C	cSt	ASTM D445	45.36	50.1	48.5	48.6

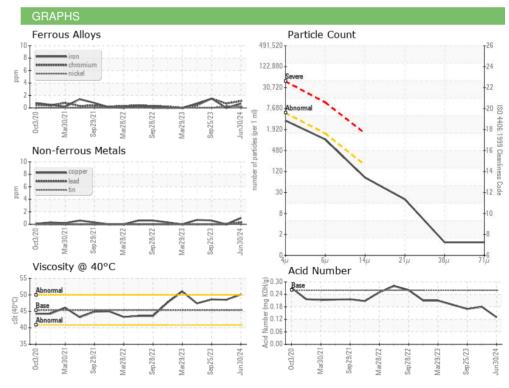



Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (316)838-9101 F: (316)838-9053

Report Id: HORWIC [WUSCAR] 06235892 (Generated: 07/16/2024 15:15:52) Rev: 1

Submitted By: JASON MCDONALD

Page 2 of 2