


OIL ANALYSIS REPORT

GP-212

B60752 - PUMP VACUUM BUSCH RA 1000 SOMME 3 (S/N C1523000447)

Pump Pump

PETRO CANADA PURITY FG EP GEAR FLUID 100 (5 GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0944834	WC0921419	WC0880582
Sample Date		Client Info		28 Jun 2024	23 Apr 2024	06 Jan 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	1	3	8
Chromium	ppm	ASTM D5185m		<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m		2	0	0
Lead	ppm	ASTM D5185m	>1	<1	0	0
Copper		ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m	>9	0	0	0
Vanadium	ppm	ASTM D5185m	>9	0	0	0
Cadmium	ppm	ASTM D5185m			0	0
	ppm			<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	<1	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	<1	0
Phosphorus	ppm	ASTM D5185m		437	579	257
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		1207	1684	982
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		1	<1	1
Sodium	ppm	ASTM D5185m		1	8	3
Potassium	ppm	ASTM D5185m	>20	1	0	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	246	241	1100
Particles >6µm		ASTM D7647	>2500	118	79	266
Particles >14µm		ASTM D7647	>320	44	13	19
Particles >21µm		ASTM D7647	>80	9	4	5
Particles >38µm		ASTM D7647	>20	1	0	1
Particles >71µm		ASTM D7647	>4	1	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/14/13	15/13/11	17/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2




OIL ANALYSIS REPORT

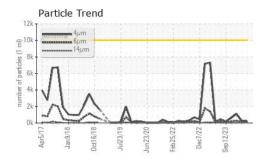









VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	103.2	88.2	89.7	95.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				The same of the sa	



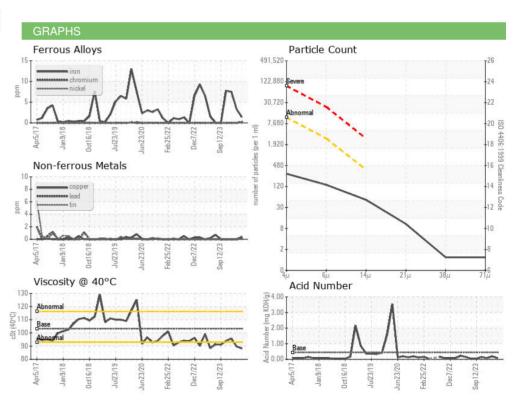





Laboratory Sample No.

: WC0944834 Lab Number : 06235914 Unique Number : 11124748

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received **Tested** Diagnosed

: 15 Jul 2024 : 16 Jul 2024

: 16 Jul 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Bottom

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: RYAN LOWE rslowe@hormel.com T: (507)437-5674

1101 NORTH MAIN ST

HORMEL FOODS - AUSTIN

F: (507)437-9805 Contact/Location: RYAN LOWE - HORAUS

AUSTIN, MN

US 55912