




OIL ANALYSIS REPORT

Sample Rating Trend

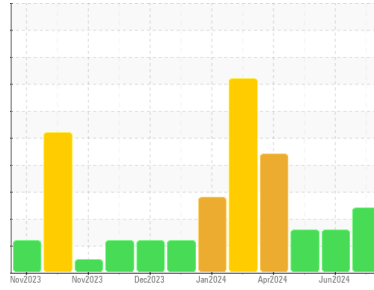

VISCOSITY



Area
RIG 816
 Machine Id
R816-MP-02
 Component
Gearbox
 Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of particulates present in the oil.

● Fluid Condition

The oil viscosity is lower than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KL0013625	KL0014476	KL0014289
Sample Date	Client Info			05 Jul 2024	11 Jun 2024	07 May 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	15	14	44
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	2	9
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>200	24	22	38
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	<1	<1	0
Barium	ppm	ASTM D5185m	15	0	0	5
Molybdenum	ppm	ASTM D5185m	15	1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	50	4	6	3
Calcium	ppm	ASTM D5185m	50	0	19	84
Phosphorus	ppm	ASTM D5185m	350	138	183	134
Zinc	ppm	ASTM D5185m	100	30	43	35
Sulfur	ppm	ASTM D5185m	12500	8953	11606	8627

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	14	12	30
Sodium	ppm	ASTM D5185m		2	9	100
Potassium	ppm	ASTM D5185m	>20	2	4	6

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 98511	▲ 47624	▲ 128683
Particles >6µm		ASTM D7647	>5000	▲ 35295	● 8222	▲ 26884
Particles >14µm		ASTM D7647	>640	▲ 2056	159	114
Particles >21µm		ASTM D7647	>160	▲ 390	19	6
Particles >38µm		ASTM D7647	>40	10	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 24/22/18	▲ 23/20/14	▲ 24/22/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	0.31	0.37	0.30


OIL ANALYSIS REPORT

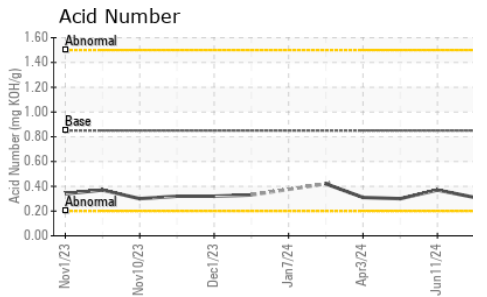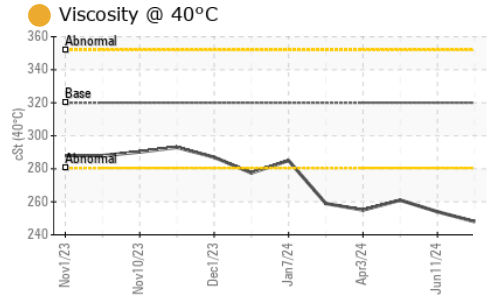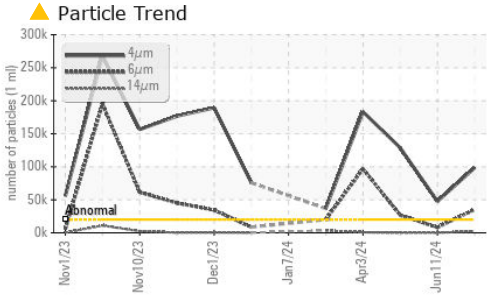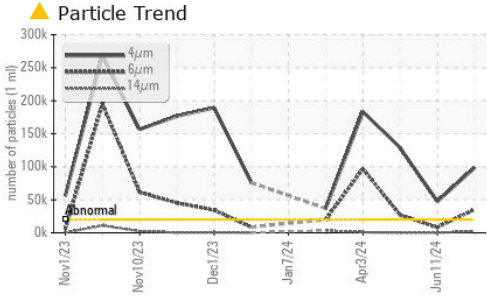





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320 ● 248	254	261

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

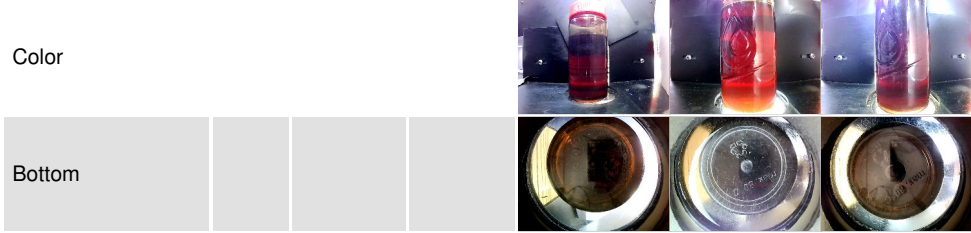

GRAPHS

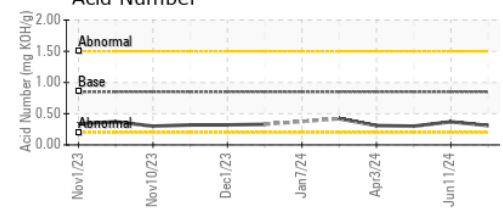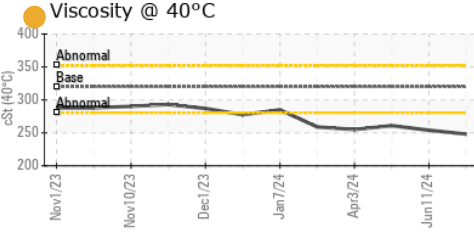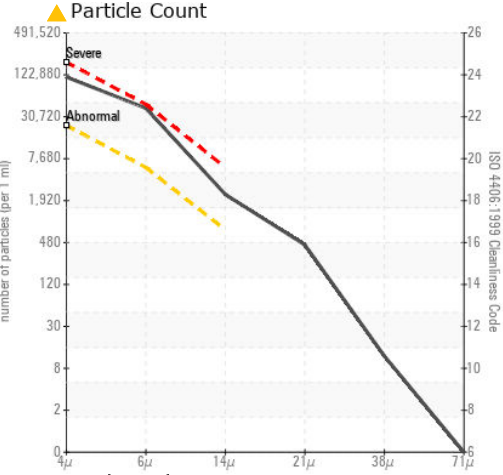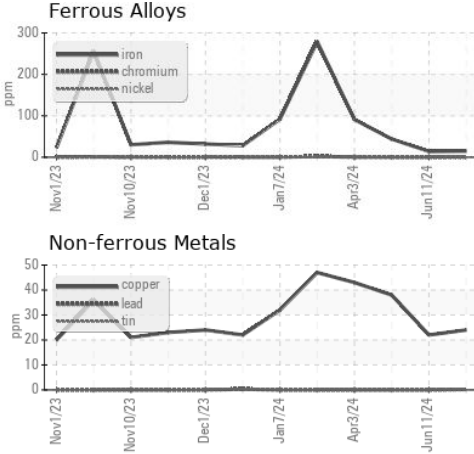

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013625 **Received** : 15 Jul 2024
Lab Number : 06235918 **Tested** : 16 Jul 2024
Unique Number : 11124752 **Diagnosed** : 16 Jul 2024 - Don Baldrige
Test Package : FLEET (Additional Tests : PrtCount)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)