

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER ASD 60 6235599 (S/N 1394)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016003	KCPA003721	KC106636
Sample Date		Client Info		03 Jul 2024	25 Aug 2023	15 Oct 2022
Machine Age	hrs	Client Info		35726	31396	25336
Oil Age	hrs	Client Info		4329	0	4859
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	11	14	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	0	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	2
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		17793	17771	15826
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304	>0.05	0.012	0.006	0.010
ppm Water	ppm	ASTM D6304		123	64.9	100.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
		ASTM D7647		1627	945	586
Particles >4µm		AOTH DTO 47	>1300	520	433	197
Particles >4µm Particles >6µm		ASTM D7647	21000			
		ASTM D7647 ASTM D7647	>80	<mark> </mark> 84	36	11
Particles >6µm Particles >14µm Particles >21µm			>80	8434	36 10	11 1
Particles >6µm Particles >14µm		ASTM D7647	>80	-		
Particles >6µm Particles >14µm Particles >21µm		ASTM D7647 ASTM D7647	>80 >20 >4	<mark>.</mark> 34	10	1
Particles >6µm Particles >14µm Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	3 4	10 0	1 0
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	34 3 0	10 0 0	1 0 0

Report Id: MONLEB [WUSCAR] 06235951 (Generated: 07/16/2024 15:48:01) Rev: 1

Contact/Location: J. WOLF - MONLEB



en Water (KF)

100

50 4k office 3k 2 11 0 Feb 13/19

eb1

0.50

0.00

1200

10000

600

4000

200

52

50

48 ()-41 ()-41 ()-44)()-44 ()-44)

42

40

3

£

Water (ppm)

(B/HOX Ê0.3 Ê 0.20 Pio 0.1

en

Acid Number


Particle Trend 14µm

ar1/70


ler1/20

ec15/2

10/10up



VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.7	44.5	44.4
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						

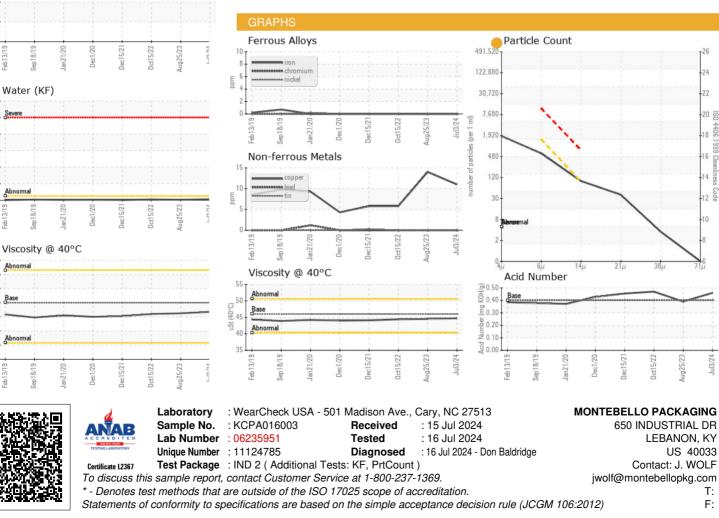

Report Id: MONLEB [WUSCAR] 06235951 (Generated: 07/16/2024 15:48:01) Rev: 1

Contact/Location: J. WOLF - MONLEB

4406

19999