

OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

Machine Id

KAESER BSD 60 6237979 (S/N 1396)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016004	KCPA003726	KC106485
Sample Date		Client Info		03 Jul 2024	25 Aug 2023	15 Oct 2022
Machine Age	hrs	Client Info		29588	25475	20330
Oil Age	hrs	Client Info		4112	0	6063
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	15	8	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
		ASTM D5185m	30	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm		00	-		
Magnesium	ppm	ASTM D5185m	90	0	0	0
Calcium	ppm		2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	<1	3
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		15814	15280	14468
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.05	0.013	0.006	0.006
ppm Water	ppm	ASTM D6304	>500	131	68.7	68.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647				
Particles >6µm		ASTM D7647	>1300			
Particles >14µm		ASTM D7647 ASTM D7647	>80			
		ASTM D7647 ASTM D7647				
Particles >21µm						
Particles >38µm		ASTM D7647	>4			
Particles >71µm		ASTM D7647				
Oil Cleanliness		ISO 4406 (c)	>/17/13			
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.44 Contac	0.42	0.48 OLE - MONLE


Report Id: MONLEB [WUSCAR] 06235955 (Generated: 07/17/2024 13:11:09) Rev: 1


Contact/Location: J. WOLF - MONLEB



OIL ANALYSIS REPORT




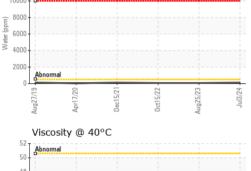




VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	A MODER	🔺 MODER	🔺 MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.3	44.4	44.5
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

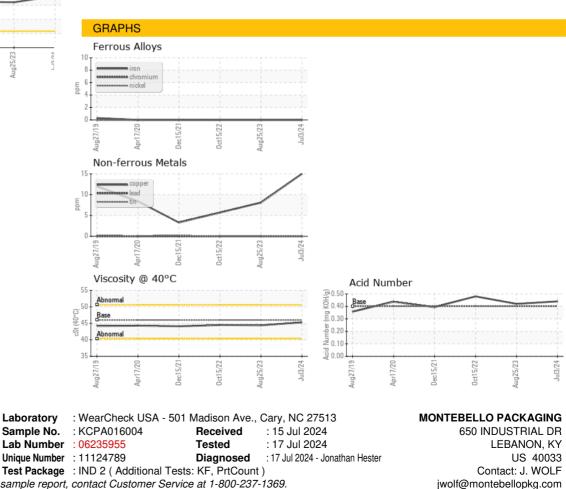

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: MONLEB [WUSCAR] 06235955 (Generated: 07/17/2024 13:11:09) Rev: 1

Certificate 12367

Contact/Location: J. WOLF - MONLEB

T:

F: