


OIL ANALYSIS REPORT

Sample Rating Trend





Machine Id

4313268 (S/N 1763)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		0ct2021	Jan 2022	Oct2022 Nov2023	Jun2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA012330	KCPA006930	KCP46156
Sample Date		Client Info		12 Jun 2024	06 Nov 2023	02 Oct 2022
Machine Age	hrs	Client Info		29198	26813	21369
Oil Age	hrs	Client Info		2384	0	3000
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	7
Copper	ppm	ASTM D5185m	>50	9	38	▲ 187
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	6	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	0	0	9
Calcium	ppm	ASTM D5185m	2	0	<1	0
Phosphorus	ppm	ASTM D5185m		0	17	14
Zinc	ppm	ASTM D5185m		9	0	0
Sulfur	ppm	ASTM D5185m		20467	17784	15991
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		4	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.05	0.007	0.008	0.010
ppm Water	ppm	ASTM D6304	>500	73	84.0	109.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1390	1320	57245
Particles >6µm		ASTM D7647	>1300	440	388	<u>▲</u> 16707
Particles >14µm		ASTM D7647	>80	27	30	<u></u> 993
Particles >21µm		ASTM D7647	>20	6	7	<u></u> 161
Particles >38μm		ASTM D7647	>4	1	0	<u>^</u> 7
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/12	18/16/12	<u>\$\text{23/21/17}\$</u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

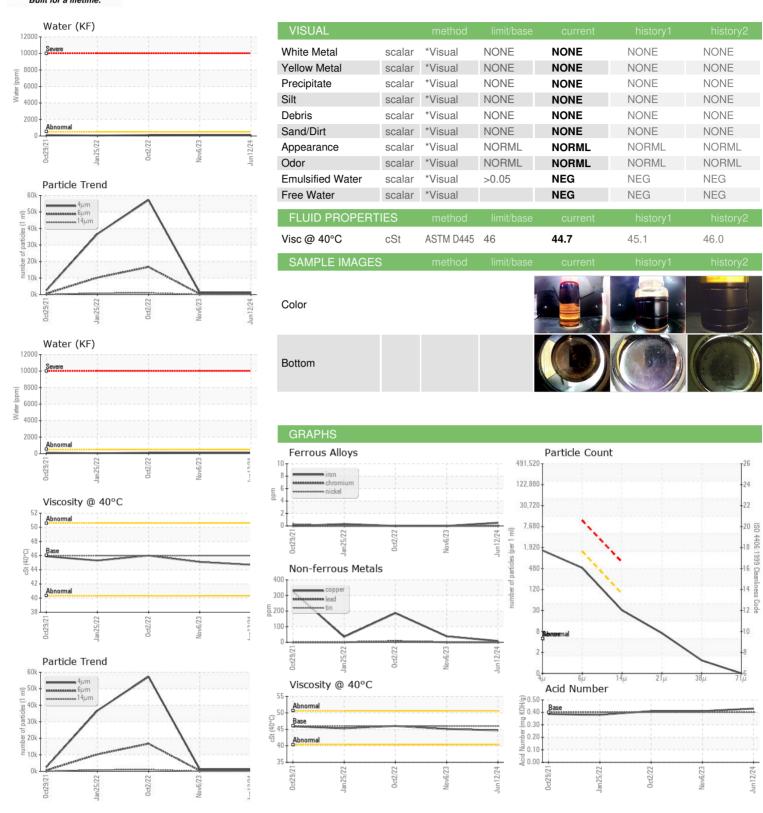





Certificate 12367

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA012330

: 06235980 Unique Number : 11124814 Test Package : IND 2 (Additional Tests: KF, PrtCount)

Received : 15 Jul 2024 **Tested** Diagnosed

: 16 Jul 2024

: 17 Jul 2024 - Don Baldridge

US 75212 Contact: Service Manager

DALLAS USA FOODS

1880 LONESTAR DR

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

DALLAS, TX