

## **OIL ANALYSIS REPORT**

KAESER AS 30T 5214949 (S/

Compressor Fluid KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

Machine Id

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SIS REPC	RI					ISO
(S/N 1089)						
		Aug2015	Apr2016 Apr2017	Apr2018 Jan2022 Ap	12023	
SAMPLE INFORM	<b>/</b> ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA020599	KCP55225	KCP47907D
Sample Date		Client Info		05 Jul 2024	18 Apr 2023	21 Oct 2022
Machine Age	hrs	Client Info		63019	52460	48888
Oil Age	hrs	Client Info		3000	3000	6117
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm		>50	15	17	12
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium Cadmium	ppm	ASTM D5185m ASTM D5185m		0	<1 0	0
	ppm			-	-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	00	0	0	0
Barium	ppm	ASTM D5185m	90	0	2	0
Molybdenum Manganese	ppm	ASTM D5185m ASTM D5185m		0	0 <1	0 <1
Magnesium	ppm	ASTM D5185m	90	10	34	30
Calcium	ppm ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m	L	0	6	11
Zinc	ppm	ASTM D5185m		14	55	62
Sulfur	ppm	ASTM D5185m		19588	19914	19722
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		12	10	10
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water	%	ASTM D6304	>0.05	0.012	0.011	0.017
ppm Water	ppm	ASTM D6304	>500	124	118.9	178.3
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		17877	4179	9932
Particles >6µm		ASTM D7647	>1300	<u> </u>	1192	<b>A</b> 3195
Particles >14µm		ASTM D7647	>80	<mark>/</mark> 294	72	<b>A</b> 221
Particles >21µm		ASTM D7647	>20	<u> </u>	12	<b>4</b> 6
Particles >38µm		ASTM D7647	>4	3	0	4
Particles >71µm		ASTM D7647		1	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 21/20/15	19/17/13	▲ 20/19/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Sample Rating Trend

ISO

mg KOH/g ASTM D8045 0.4


0.34 0.38 Contact/Location: ? ? - PERCOP

0.31


Page 1 of 2





# **OIL ANALYSIS REPORT**












VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.3	45.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						

Bottom

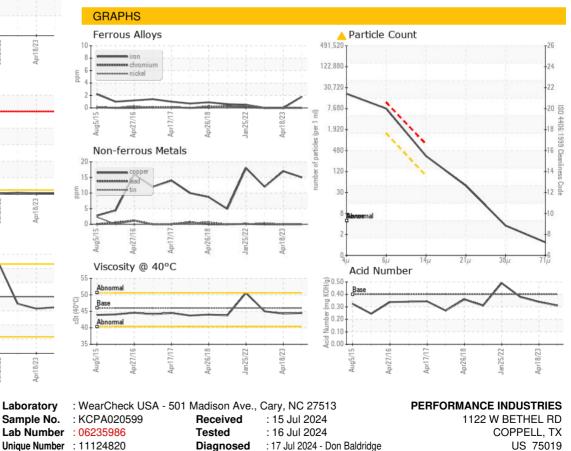





To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PERCOP [WUSCAR] 06235986 (Generated: 07/17/2024 11:21:51) Rev: 1

Contact/Location: ? ? - PERCOP Page 2 of 2

Contact:

T:

F: