




OIL ANALYSIS REPORT

Sample Rating Trend

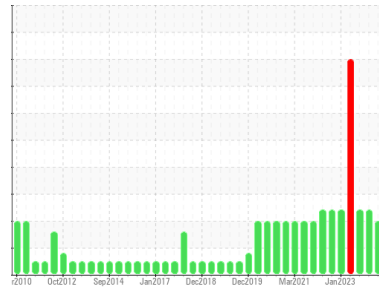

Machine Id
455.XX414

Component
Hydraulic System

Fluid
MOBIL NYVAC FR 200 FLUID (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The pH level of this fluid is within the acceptable limits. The condition of the oil is acceptable for the time in service. pH 9.0.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0042945	RP0008454	RP0000828
Sample Date	Client Info		02 Jul 2024	20 Mar 2024	08 May 2023
Machine Age	days	Client Info	0	0	0
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<1	<1	<1
Chromium	ppm	ASTM D5185m >20	0	0	<1
Nickel	ppm	ASTM D5185m >20	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	2
Aluminum	ppm	ASTM D5185m >20	0	1	0
Lead	ppm	ASTM D5185m >20	0	0	<1
Copper	ppm	ASTM D5185m >20	0	2	<1
Tin	ppm	ASTM D5185m >20	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	2

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	1	4
Barium	ppm	ASTM D5185m	0	2	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	0	4	4
Calcium	ppm	ASTM D5185m	0	12	4
Phosphorus	ppm	ASTM D5185m	8	19	13
Zinc	ppm	ASTM D5185m	0	36	23

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	0	<1	<1
Sodium	ppm	ASTM D5185m	<1	3	1
Potassium	ppm	ASTM D5185m >20	1	1	0
Water	%	ASTM D6304 >55	41.8	44.5	43.7
ppm Water	ppm	ASTM D6304 >55000	418000	445000	437000

FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>320	▲ 626	▲ 887	▲ 2636
Particles >6µm	ASTM D7647	>80	▲ 341	▲ 483	▲ 1436
Particles >14µm	ASTM D7647	>20	▲ 58	▲ 82	▲ 244
Particles >21µm	ASTM D7647	>4	▲ 20	▲ 28	▲ 82
Particles >38µm	ASTM D7647	>3	3	▲ 4	▲ 13
Particles >71µm	ASTM D7647	>3	0	0	1
Oil Cleanliness	ISO 4406 (c)	>15/13/11	▲ 16/16/13	▲ 17/16/14	▲ 19/18/15

OIL ANALYSIS REPORT


Particle Trend

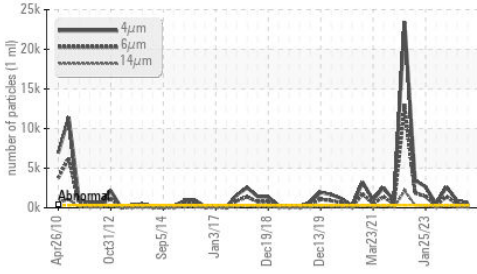


Water (KF)

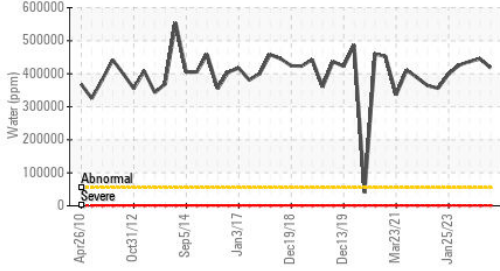


Reserve Alkalinity

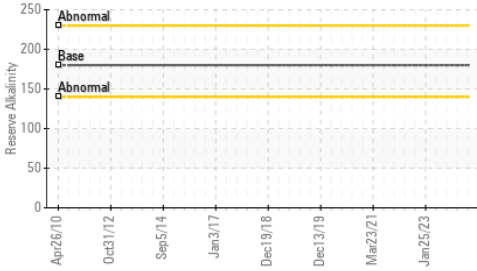

Viscosity @ 40°C

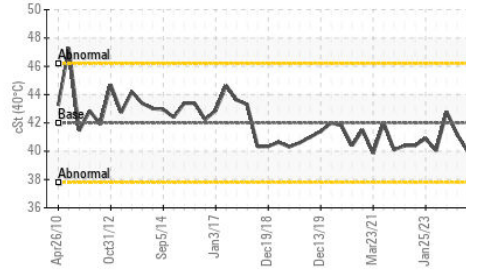


Reserve Alkalinity

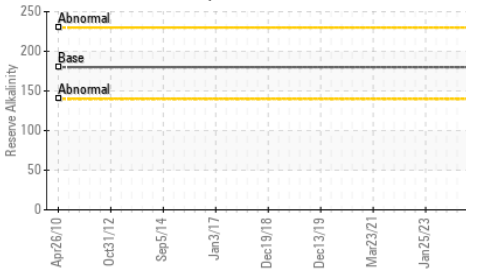

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>55	0.2%	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
pH	Scale 0-14	ASTM D1287	9.00	9.00	8.00
Visc @ 40°C	cSt	ASTM D445	42	41.2	42.8

SAMPLE IMAGES

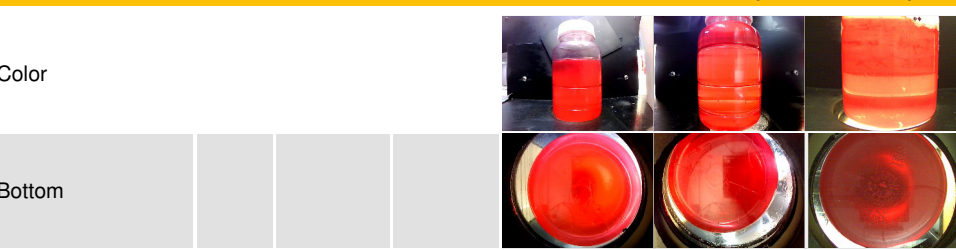


GRAPHS


Ferrous Alloys

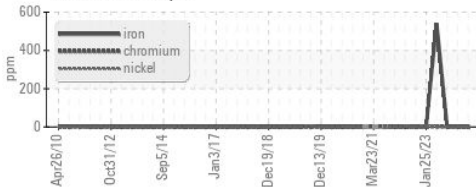


Non-ferrous Metals

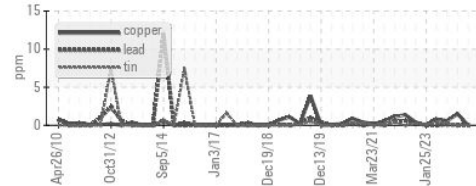


Viscosity @ 40°C

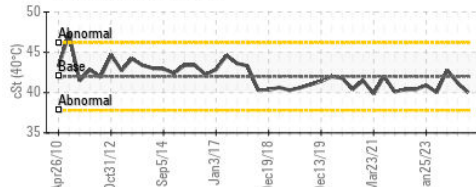

Particle Count

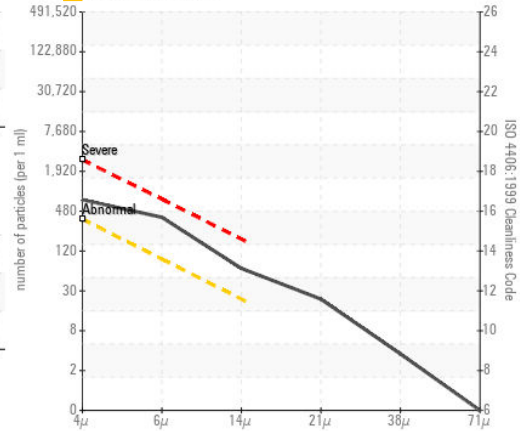

Acid Number

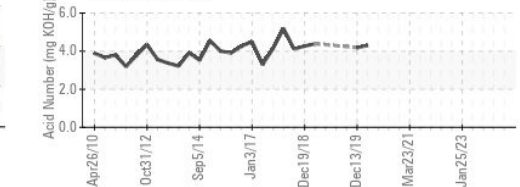

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RP0042945

Lab Number : 06236076

Unique Number : 11124910

Test Package : IND 2 (Additional Tests: pH, ReserveAlk)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 15 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 17 Jul 2024 - Jonathan Hester

INTERNATIONAL PAPER

1785 Weyerhaeuser Road

VANCEBORO, NC

US 28586

Contact: DOUG WEIR

Doug.Weir@paper.com;jon.fazenbaker@wearcheck.com

T: (252)633-7350

F: (252)633-7761