


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id **155XX072**

Hydraulic System

ROYAL PURPLE SYNFILM 46 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2020 Oct2	020 Jan2021 Jun2021 Sep2	021 Jan2022 Feb2022 Jan2023 Ma	2024 Jul2024	
CAMPLE INFORM	AATION	mathad	limit/bass	our wordt	hiotomit	hiotom/0
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0042940	WC0432500	RP0000825
Sample Date		Client Info		02 Jul 2024	20 Mar 2024	25 Jan 2023
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Oil Changed Sample Status		Client Info		N/A NORMAL	N/A ATTENTION	N/A ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	1	2
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	5	4	15
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		1	23	0
Calcium	ppm	ASTM D5185m		0	4	0
Phosphorus	ppm	ASTM D5185m		0	0	6
Zinc	ppm	ASTM D5185m		0	4	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		2	2	0
Potassium	ppm	ASTM D5185m	>20	<1	1	<1
Water	%	ASTM D6304	>0.05	0.007	0.01	0.008
ppm Water	ppm	ASTM D6304	>500	72	100	80.9
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1434	8199	
Particles >6µm		ASTM D7647	>1300	553	1650	
Particles >14µm		ASTM D7647	>160	32	114	
Particles >21µm		ASTM D7647	>40	5	34	
Particles >38μm		ASTM D7647	>10	1	1	
Particles >71μm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	20/18/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	0.26	0.31	0.22



OIL ANALYSIS REPORT

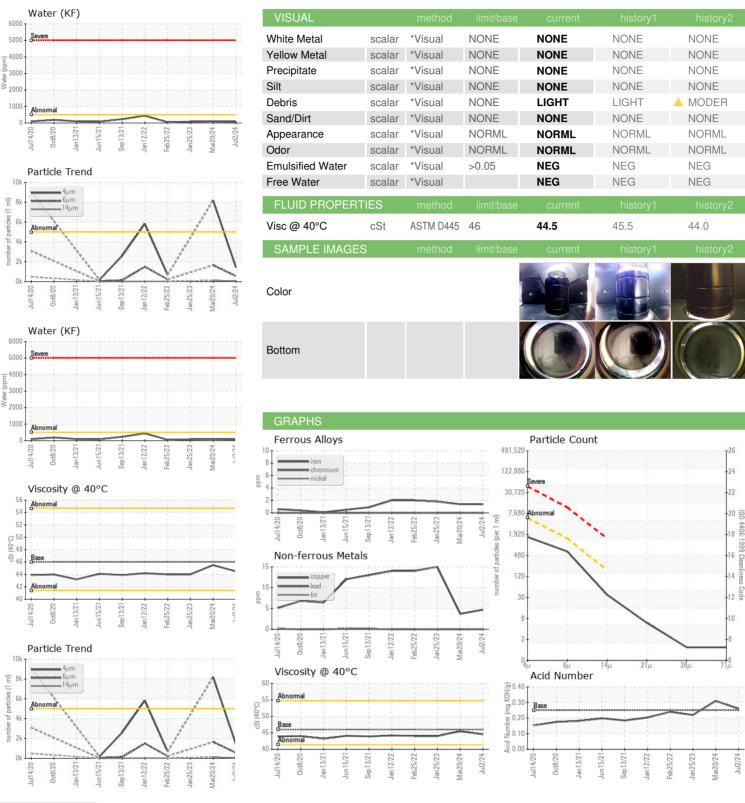





Certificate 12367

Laboratory Sample No. Lab Number Unique Number : 11124930

: RP0042940 : 06236096 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 15 Jul 2024

Tested : 18 Jul 2024 Diagnosed : 18 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: DOUG WEIR Doug.Weir@ipaper.com;jon.fazenbaker@wearcheck.com T: (252)633-7350

INTERNATIONAL PAPER

1785 Weyerhaeuser Road

VANCEBORO, NC

F: (252)633-7761

US 28586

Report Id: WEYNEW [WUSCAR] 06236096 (Generated: 07/18/2024 12:53:40) Rev: 1

Contact/Location: DOUG WEIR - WEYNEW