




# OIL ANALYSIS REPORT

## Sample Rating Trend

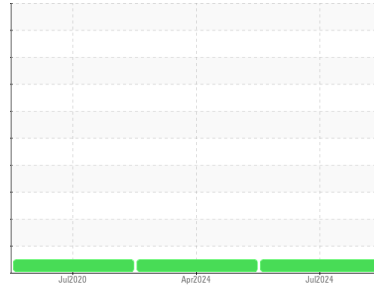

**NORMAL**



Machine Id  
**15452**  
 Component  
**Hydraulic System**  
 Fluid  
**QUINCY QUINSYN F (50 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0958851</b>   | WC0802851   | WC0478507   |
| Sample Date        | Client Info |             |            | <b>10 Jul 2024</b> | 02 Apr 2024 | 01 Jul 2020 |
| Machine Age        | hrs         | Client Info |            | <b>28637</b>       | 26598       | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | Not Changd  | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current    | history1 | history2 |
|-------------|-----|-------------|------------|------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>0</b>   | 0        | 0        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>0</b>   | 0        | 0        |
| Nickel      | ppm | ASTM D5185m | >20        | <b>0</b>   | 0        | 0        |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>0</b>   | <1       | 0        |
| Lead        | ppm | ASTM D5185m | >20        | <b>0</b>   | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >20        | <b>0</b>   | <1       | 0        |
| Tin         | ppm | ASTM D5185m | >20        | <b>0</b>   | 0        | 0        |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b> | ---      | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |


| ADDITIVES  |     | method      | limit/base | current  | history1 | history2 |
|------------|-----|-------------|------------|----------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Barium     | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m |            | <b>0</b> | 0        | <1       |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m |            | <b>2</b> | 0        | 0        |
| Calcium    | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Phosphorus | ppm | ASTM D5185m |            | <b>2</b> | 4        | 0        |
| Zinc       | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |
| Sulfur     | ppm | ASTM D5185m |            | <b>0</b> | 0        | 0        |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >15        | <b>&lt;1</b> | 0        | 6        |
| Sodium       | ppm | ASTM D5185m |            | <b>1</b>     | <1       | 0        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b>     | 0        | 0        |

| FLUID CLEANLINESS |  | method       | limit/base | current    | history1 | history2 |
|-------------------|--|--------------|------------|------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   |            | <b>---</b> | ---      | 1091     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>---</b> | ---      | 468      |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>---</b> | ---      | 74       |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>---</b> | ---      | 25       |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>---</b> | ---      | 1        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>---</b> | ---      | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >--/17/14  | <b>---</b> | ---      | 17/16/13 |



# OIL ANALYSIS REPORT

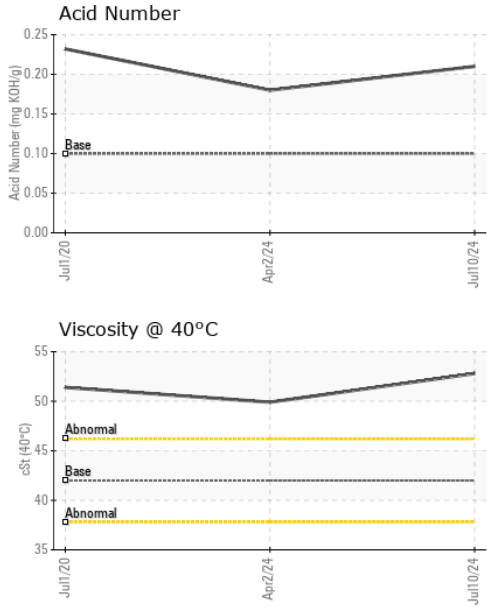


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D8045 | .10        | <b>0.21</b> | 0.18     | 0.232    |



| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual | >0.05      | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method    | limit/base | current     | history1 | history2 |
|------------------|-----|-----------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt | ASTM D445 | 42         | <b>52.8</b> | 49.9     | 51.4     |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

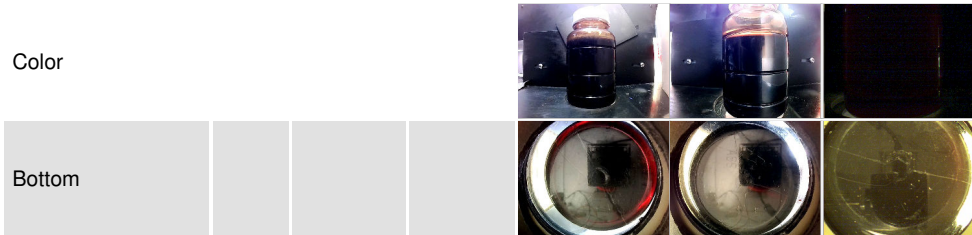

## GRAPHS

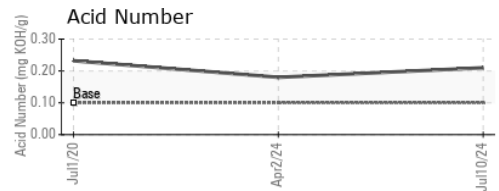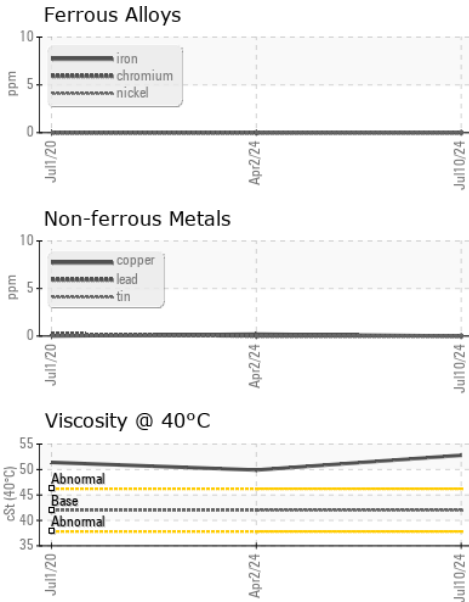

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0958851      **Received** : 15 Jul 2024  
**Lab Number** : **06236180**      **Tested** : 17 Jul 2024  
**Unique Number** : 11125014      **Diagnosed** : 17 Jul 2024 - Don Baldrige  
**Test Package** : IND 2

**LAMB WESTON/RDO**  
 PO BOX 552  
 PARK RAPIDS, MN  
 US 56470

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MICHAEL GRUIS  
michael.gruis@lambweston.com

T: (218)732-2188

F: (218)732-2175