




OIL ANALYSIS REPORT

Sample Rating Trend

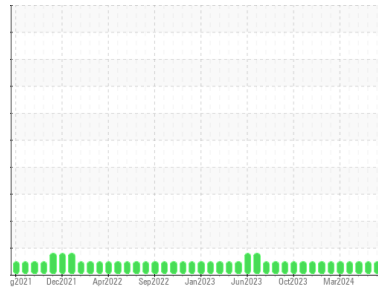

NORMAL



Area

Martinsville

Machine Id

[Martinsville] Oil - Starboard Main Engine

Component

Starboard Main Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (150 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: George Willis)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0898337	WC0735181	WC0845881
Sample Date	Client Info	06 Jul 2024	07 Jun 2024	11 May 2024
Machine Age	hrs	23110	22678	22069
Oil Age	hrs	2036	1604	996
Oil Changed	Client Info	Not Chngd	Filtered	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >75	14	14	12
Chromium	ppm	ASTM D5185m >8	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m >3	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >15	<1	3	2
Lead	ppm	ASTM D5185m >18	2	3	3
Copper	ppm	ASTM D5185m >80	18	17	14
Tin	ppm	ASTM D5185m >14	0	<1	2
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 250	15	20	22
Barium	ppm	ASTM D5185m 10	0	0	0
Molybdenum	ppm	ASTM D5185m 100	72	71	69
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	1759	1568	1560
Calcium	ppm	ASTM D5185m 3000	1420	1267	1268
Phosphorus	ppm	ASTM D5185m 1150	1218	1043	1166
Zinc	ppm	ASTM D5185m 1350	1506	1341	1337
Sulfur	ppm	ASTM D5185m 4250	4231	3198	4061

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	3	4	5
Sodium	ppm	ASTM D5185m >158	5	6	2
Potassium	ppm	ASTM D5185m >20	<1	1	2
Water	%	ASTM D6304 >0.1	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	0.3	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	10.5	10.0	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.9	22.3	21.6


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.5	19.1	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	11.56	12.17	12.74




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

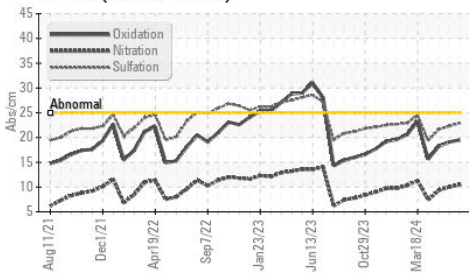

Base Number

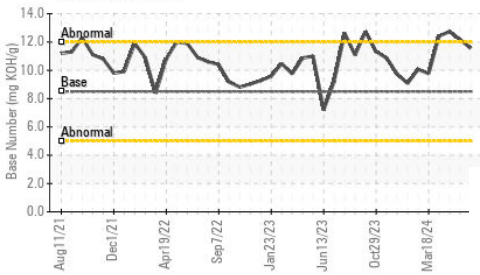

Viscosity @ 100°C

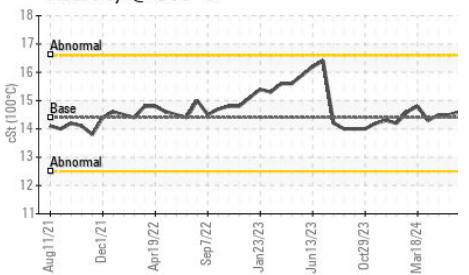


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.6	14.5

GRAPHS


Ferrous Alloys

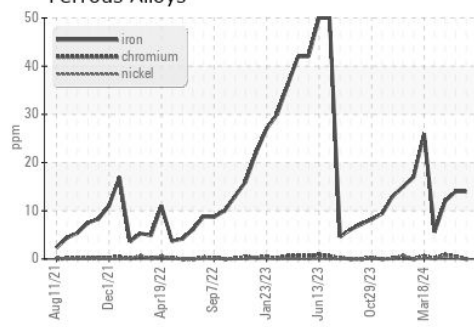


Non-ferrous Metals

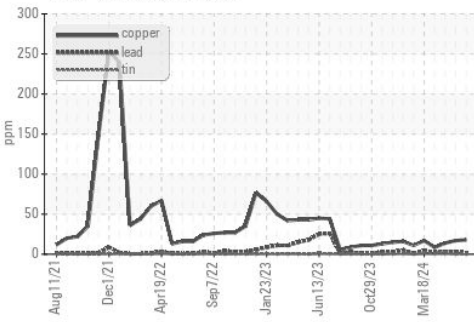

Viscosity @ 100°C

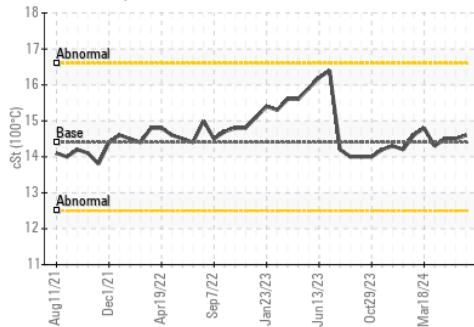

Base Number

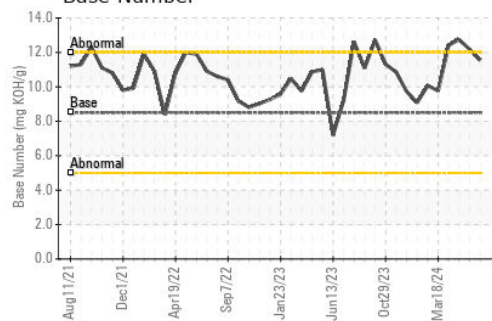

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0898337 **Received** : 15 Jul 2024
Lab Number : **06236278** **Tested** : 16 Jul 2024
Unique Number : 11125112 **Diagnosed** : 16 Jul 2024 - Sean Felton
Test Package : IND 2 (Additional Tests: KF)

MARATHON PETROLEUM CO.
 101 12TH ST
 CATLETTSBURG, KY
 US 41169
 Contact: CORY GUMBERT
 cagumbert@marathonpetroleum.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (606)585-3950

F: x: