




OIL ANALYSIS REPORT



Area
OKLAHOMA/102/EG - DOZER
 Machine Id
36.22L [OKLAHOMA^102^EG - DOZER]
 Component
Left Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (4 GAL)

Sample Rating Trend

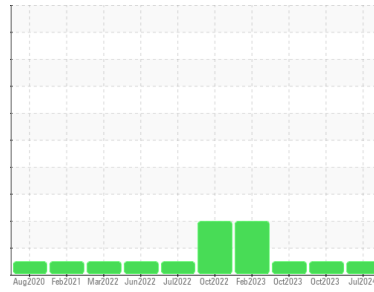

NORMAL



DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- Fluid Condition**
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0945688	WC0862683	WC0833833
Sample Date	Client Info		03 Jul 2024	26 Oct 2023	03 Oct 2023
Machine Age	hrs	Client Info	7783	7238	7176
Oil Age	hrs	Client Info	5860	1378	5860
Oil Changed	Client Info		Changed	Not Changd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>800	95	55	52
Chromium	ppm	ASTM D5185m	>10	3	2	2
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	2	2	0
Lead	ppm	ASTM D5185m	>10	<1	2	<1
Copper	ppm	ASTM D5185m	>75	2	1	2
Tin	ppm	ASTM D5185m	>8	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		2	1	6
Barium	ppm	ASTM D5185m		2	5	7
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		3	2	2
Magnesium	ppm	ASTM D5185m		13	27	11
Calcium	ppm	ASTM D5185m		3078	3034	3082
Phosphorus	ppm	ASTM D5185m		1115	1136	1081
Zinc	ppm	ASTM D5185m		1289	1328	1355
Sulfur	ppm	ASTM D5185m		10320	11168	13662

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>400	7	6	6
Sodium	ppm	ASTM D5185m		1	5	0
Potassium	ppm	ASTM D5185m	>20	6	4	6

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT



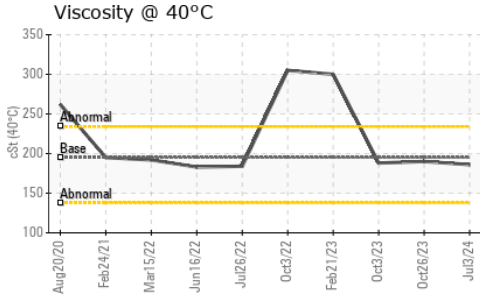


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	195	186	190	188

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

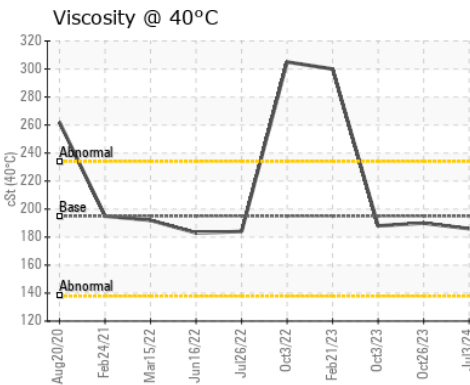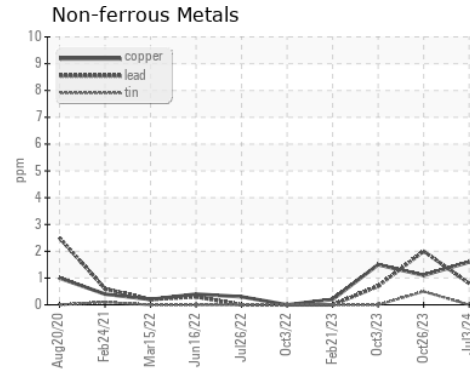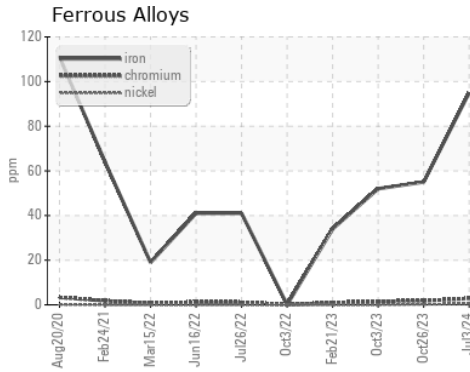

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0945688
Lab Number : **06236536**
Unique Number : 11125370
Test Package : CONST

Received : 15 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 16 Jul 2024 - Wes Davis

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)