




# OIL ANALYSIS REPORT

## Sample Rating Trend

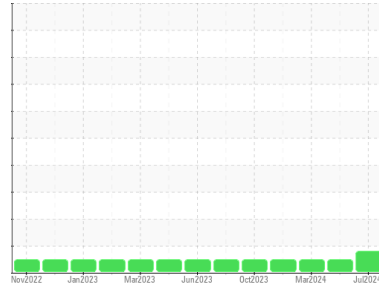

WEAR



Machine Id  
**CATERPILLAR D6 10032 (S/N KEW01099)**  
 Component  
**Transmission (Manual)**  
 Fluid  
**TDTO FLUID SAE 30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

An increase in the copper level is noted. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the fluid.

#### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0898990</b>	WC0913301	WC0913226
Sample Date	Client Info			<b>11 Jul 2024</b>	21 May 2024	27 Mar 2024
Machine Age	hrs	Client Info		<b>7293</b>	6538	5940
Oil Age	hrs	Client Info		<b>1347</b>	598	727
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>10</b>	5	2
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>7	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>127</b>	8	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	37	<b>8</b>	7	7
Barium	ppm	ASTM D5185m	7	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	3	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	40	<b>21</b>	41	36
Calcium	ppm	ASTM D5185m	2650	<b>2830</b>	2999	3081
Phosphorus	ppm	ASTM D5185m	1050	<b>929</b>	950	1001
Zinc	ppm	ASTM D5185m	1075	<b>989</b>	1158	1181
Sulfur	ppm	ASTM D5185m	5750	<b>3924</b>	4035	4392

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m		<b>4</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT


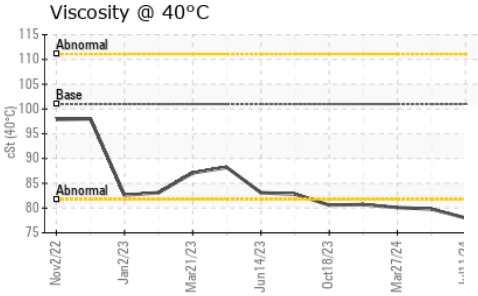
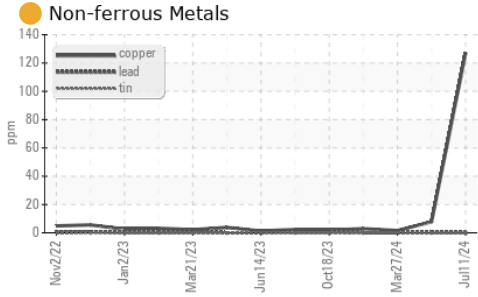


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	101	<b>78.0</b>	79.8	80.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

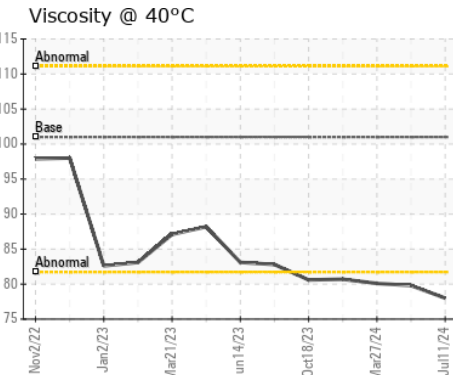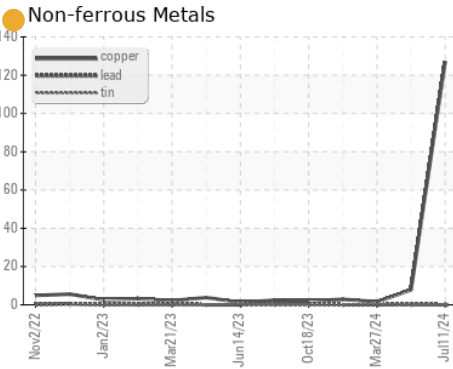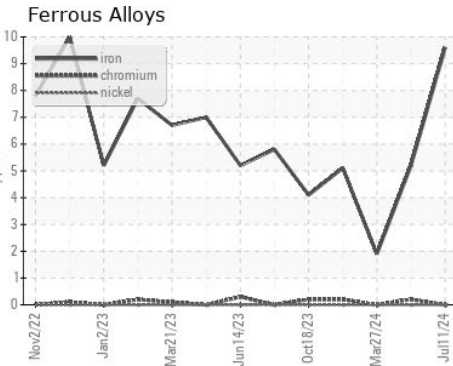

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0898990      **Received** : 15 Jul 2024  
**Lab Number** : **06236638**      **Tested** : 16 Jul 2024  
**Unique Number** : 11125472      **Diagnosed** : 17 Jul 2024 - Don Baldrige  
**Test Package** : CONST

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)