


OIL ANALYSIS REPORT



Area KANSAS/44/SKIDSTEER Machine Id 53.150L [KANSAS^44^SKIDSTEER]

Hydraulic System

MOBIL MOBILTRANS AST 30 (--- GAL)

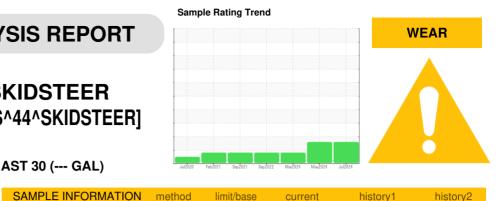

history1

historv2

current

DIP	Gr	100	515	

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

🔺 Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ALION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0918345	WC0901240	WC0901303
Sample Date		Client Info		08 Jul 2024	29 May 2024	11 Mar 2024
Machine Age	hrs	Client Info		2958	5372	1616
Oil Age	hrs	Client Info		0	5372	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	4 2	2 9	A 38
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m		0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	4	3	3
_ead	ppm	ASTM D5185m	>10	1	1	2
Copper	ppm	ASTM D5185m		19	10	18
Fin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m	-	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		12	24	10
Barium	ppm	ASTM D5185m		0	0	0
Volybdenum	ppm	ASTM D5185m		2	<1	0
Vanganese	ppm	ASTM D5185m		<1	<1	<1
Vagnesium	ppm	ASTM D5185m		24	19	24
Calcium	ppm	ASTM D5185m		1546	2042	1182
Phosphorus	ppm	ASTM D5185m		844	868	832
Zinc	ppm	ASTM D5185m		995	1031	1023
Sulfur	ppm	ASTM D5185m		3388	4016	3316
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	17	12	8
Sodium	ppm	ASTM D5185m		3	3	3
Potassium	ppm	ASTM D5185m	>20	3	1	2
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		106919	64903	65938
Particles >6µm		ASTM D7647	>2500	<u> </u>	▲ 5413	1226
Particles >14µm		ASTM D7647	>640	11	14	13
Particles >21µm		ASTM D7647	>160	3	1	3
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/16	4/21/11	▲ 23/20/11	23/17/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.81	0.89	0.86
25:55) Rev: 1					Submitted By: J	IAMES MOORI
						Deve 1 -f


limit/base


Report Id: SHEWIC [WUSCAR] 06236761 (Generated: 07/17/2024 14


Page 1 of 2





OIL ANALYSIS REPORT








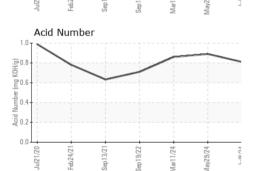






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	FIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	51.0	70.1	44.8
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color						



Bottom

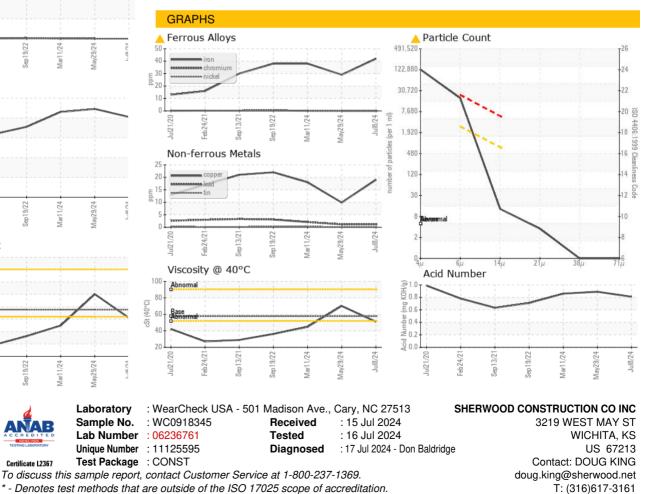

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SHEWIC [WUSCAR] 06236761 (Generated: 07/17/2024 14:25:55) Rev: 1

Submitted By: JAMES MOORE

Page 2 of 2

F: x: