


OIL ANALYSIS REPORT

Sample Rating Trend



Area OKLAHOMA/3/EG - TRUCK-OFF-HWY-HEAVY HAUL 69.03 [OKLAHOMA^3^EG - TRUCK-OFF-HWY-HEAVY HAUL] Steering

MOBIL MOBILTRANS AST 30 (--- GAL)





DIAGNOSIS Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0945652	WC0873991	
Sample Date		Client Info		01 Jul 2024	26 Feb 2024	
Machine Age	hrs	Client Info		2525	1448	
Oil Age	hrs	Client Info		0	1448	
Oil Changed	1110	Client Info		N/A	Changed	
Sample Status				NORMAL	ABNORMAL	
-				Normize		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>60	4	4	
Chromium	ppm	ASTM D5185m	>12	0	0	
Nickel	ppm	ASTM D5185m	>6	0	0	
Titanium	ppm	ASTM D5185m		0	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>4	4	4	
Lead	ppm	ASTM D5185m	>12	0	0	
Copper	ppm	ASTM D5185m	>30	1	1	
Tin	ppm	ASTM D5185m		0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		10	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		<1	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		17	12	
Calcium	ppm	ASTM D5185m		2789	2815	
Phosphorus	ppm	ASTM D5185m		980	1007	
Zinc	ppm	ASTM D5185m		1159	1167	
Sulfur	ppm	ASTM D5185m		5340	5169	
CONTAMINANTS		method				history2
Silicon	ppm	ASTM D5185m	>10	12	12	
Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>10	12 4	12 3	
Sodium	ppm ppm	ASTM D5185m		4	3	 history2
Sodium Potassium	ppm ppm	ASTM D5185m ASTM D5185m	>20	4 3	3 4	
Sodium Potassium FLUID CLEANLIN	ppm ppm	ASTM D5185m ASTM D5185m method	>20 limit/base	4 3 current	3 4 history1	 history2
Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm	ASTM D5185m ASTM D5185m method ASTM D7647	>20 limit/base	4 3 current 519	3 4 history1 102907	 history2
Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm	ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647	>20 limit/base >640	4 3 current 519 109	3 4 <u>history1</u> 102907 ▲ 18175	 history2
Sodium Potassium FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm ppm	ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >640 >80	4 3 current 519 109 13	3 4 history1 102907 ▲ 18175 ▲ 346	 history2
Sodium Potassium FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm Particles >21μm	ppm ppm	ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >640 >80 >20 >4	4 3 current 519 109 13 4	3 4 history1 102907 ▲ 18175 ▲ 346 ▲ 67	 history2
Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm	ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >640 >80 >20 >4	4 3 current 519 109 13 4 0	3 4 history1 102907 ▲ 18175 ▲ 346 ▲ 67 2	 history2
Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm IESS	ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >640 >80 >20 >4 >3	4 3 current 519 109 13 4 0 0	3 4 history1 102907 ▲ 18175 ▲ 346 ▲ 67 2 2 0	 history2
Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness	ppm ppm IESS	ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>20 limit/base >640 >80 >20 >4 >3 >/16/13	4 3 current 519 109 13 4 0 0 0 16/14/11	3 4 history1 102907 ▲ 18175 ▲ 346 ▲ 67 2 0 0 ▲ 24/21/16	 history2


Report Id: SHEWIC [WUSCAR] 06236762 (Generated: 07/17/2024 14:22:28) Rev: 1


Page 1 of 2



OIL ANALYSIS REPORT





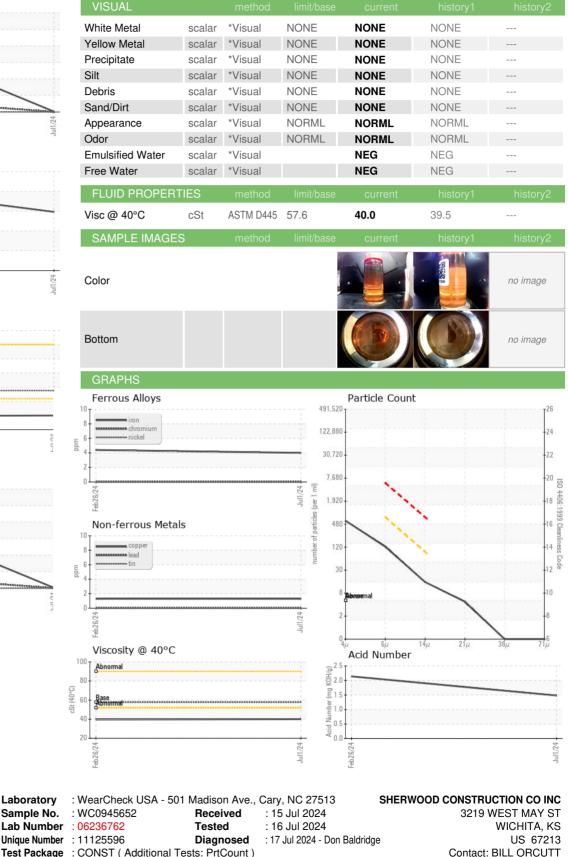

Test Package : CONST (Additional Tests: PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No.

Submitted By: SHAWN SOUTH Page 2 of 2

william.orcutt@wildcat.net

T:

F: