

OIL ANALYSIS REPORT

NORMAL

Machine Ic KAESER B61275 - KAESER 1 (S/N 1223)

Compressor

ULTRACHEM OMNILUBE 32/46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

10000							
5 1 1							
1							
li i i i							
						1111	
			A 1 A 1				
			1 1 1				
2010	A 2010	C 1 2020	14 2021	F 1 2022	A 2022	0. 2012	14 2024



SAMPLE INFORMATION method WC0953081 WC0921403 WC0921399 Sample Number **Client Info** 08 Jul 2024 Sample Date Client Info 11 Jun 2024 13 May 2024 64040 Machine Age hrs **Client Info** 63437 62817 Oil Age hrs Client Info 0 0 0 Oil Changed Not Changd Not Changd **Client Info** Not Changd Sample Status NORMAL NORMAL NORMAL CONTAMINATION NEG >0.05 NEG Water WC Method NEG WEAR METALS ppm ASTM D5185m >50 0 0 0 Iron Chromium ASTM D5185m >10 0 0 0 ppm Nickel 0 0 ppm ASTM D5185m >3 <1 Titanium ASTM D5185m >3 0 0 ppm <1 0 0 Silver >2 ppm ASTM D5185m <1 Aluminum ppm ASTM D5185m >10 0 0 1 ASTM D5185m >10 0 0 0 Lead ppm 0 <1 2 Copper ppm ASTM D5185m >50 0 Tin ASTM D5185m >10 0 ppm <1 Vanadium 0 0 ppm ASTM D5185m <1 0 0 Cadmium 0 ppm ASTM D5185m 0 0 0 Boron ppm ASTM D5185m 1 ASTM D5185m 0.3 0 Barium ppm 0 0 Molvbdenum ASTM D5185m 0 0 0 0 ppm ASTM D5185m 0 0 Manganese ppm <1 <1 2 0 Magnesium ASTM D5185m 0 0 ppm 0 2 Calcium ASTM D5185m 0.5 0 ppm Phosphorus ASTM D5185m 536 120 152 199 ppm Zinc ppm ASTM D5185m 0.2 4 2 8 Sulfur ASTM D5185m 649 1069 1060 1319 ppm Silicon ppm ASTM D5185m >25 <1 <1 <1 Sodium ASTM D5185m <1 1 1 ppm Potassium ASTM D5185m >20 0 0 2 ppm

	ppm		200	U	0	-
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		1137	1464	628
Particles >6µm		ASTM D7647	>1300	427	536	185
Particles >14µm		ASTM D7647	>80	39	52	7
Particles >21µm		ASTM D7647	>20	17	12	2
Particles >38µm		ASTM D7647	>4	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	17/16/12	18/16/13	16/15/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 0.337

Report Id: BURNEV [WUSCAR] 06236799 (Generated: 07/17/2024 14:46:12) Rev: 1

0.21


0.21 Contact/Location: EDWARDO COBIO - BURNEV


0.22



OIL ANALYSIS REPORT


80k 70k	4/.	/m			1		
60k		um um			1		
60k					1		
g 40k -					11		
30k -			~		141		
201			N				
- LUN		and the	1		13	Λ.	
10k	Λ	An	Lond A.				
		\sim	<u></u>		Ser. 1		Ulusa
10k	Aug4/19	eb22/20	Mar6/21	Feb6/22	hpr19/23	Sep5/23	Mar19/24

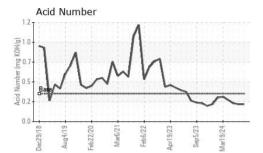




(m l) saticles (1 ml) 30k 30k 30k 30k 10 0 Apr19/23 Dec29/18 Mar19/24 -Clade Sep5/23 10100 de

VICLIAI		and the set	Pare 1 /le anna		In the term of	history O
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	42.0	42.4	43.4	48.2
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						C. C. C.
Bottom						

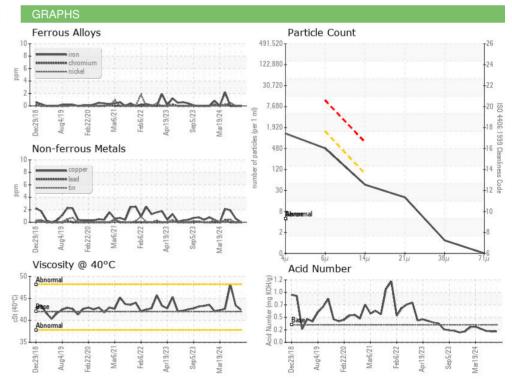

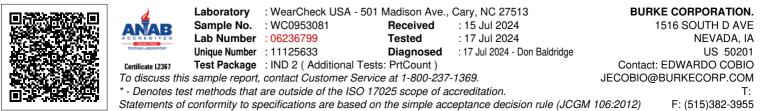

Report Id: BURNEV [WUSCAR] 06236799 (Generated: 07/17/2024 14:46:12) Rev: 1

Contact/Location: EDWARDO COBIO - BURNEV

Page 2 of 2