

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

### Machine Id KAESER SK 15 6032074 (S/N 2220)

Component Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA020572	KCPA014375	KCPA001924
Sample Date		Client Info		26 Jun 2024	26 Jun 2024	05 Jun 2023
Machine Age	hrs	Client Info		18103	18103	15367
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium		ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
	ppm			-		
Aluminum	ppm	ASTM D5185m		0	0	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		16	6	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	5
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	2	30	32
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	26	<1	0
Zinc	ppm	ASTM D5185m	0	0	2	11
Sulfur	ppm	ASTM D5185m	23500	16151	20693	18768
CONTAMINANTS	ppm	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	0
Sodium	ppm	ASTM D5185m		2	7	8
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304		0.004	0.030	0.017
ppm Water	ppm	ASTM D6304	>500	46	307	175.8
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		24235	58261	7077
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u> </u>	2200
Particles >14µm		ASTM D7647	>80	<b>A</b> 746	<u> </u>	🔺 165
Particles >21µm		ASTM D7647	>20	<u> </u>	<u> </u>	<b>4</b> 3
Particles >38µm		ASTM D7647	>4	<b>4</b> 5	4	1
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/20/17	▲ 23/22/17	▲ 20/18/15
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.30	0.398	0.36
					ntact/Location: E	0.00


Report Id: BILBEN [WUSCAR] 06236844 (Generated: 07/17/2024 14:52:10) Rev: 1


Page 1 of 2





Built for a lifetime

# **OIL ANALYSIS REPORT**







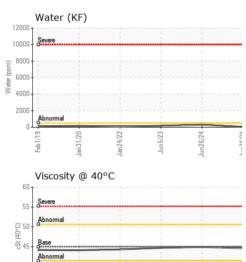

an24/22


40

3

S


eb 1

an31/20

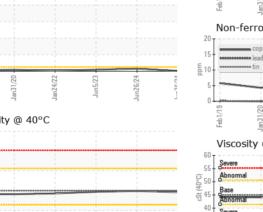



Bottom

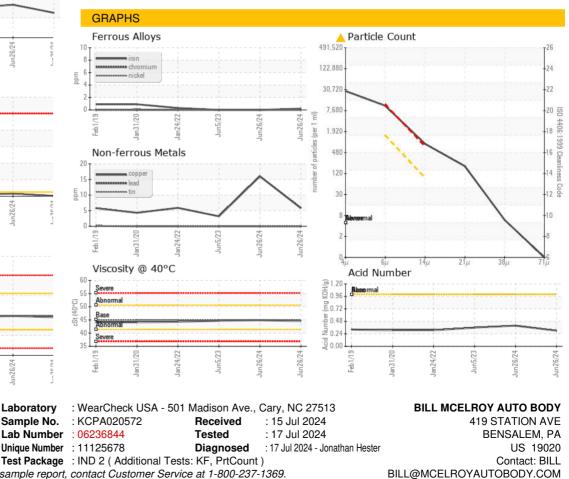

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: BILBEN [WUSCAR] 06236844 (Generated: 07/17/2024 14:52:10) Rev: 1

Certificate 12367

Contact/Location: BILL ? - BILBEN Page 2 of 2

T:

F: