


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



G

ATLAS COPCO AIR AC STUN 2 (S/N API327076)

Air Compressor

USPI AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		an 2017 Feb 2	018 Mar2019 Apr2020	Marž021 Marž022 Marž023	Feb 2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM37031	USPM30153	USPM29999
Sample Date		Client Info		14 Jul 2024	26 Feb 2024	12 Oct 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>4	0	<1	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>40	0	0	0
Tin	ppm	ASTM D5185m	>5	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	0	0	<1	0
Calcium	ppm	ASTM D5185m	0	0	0	1
Phosphorus	ppm	ASTM D5185m	1	1	0	<1
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	0	0	0	5
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	0	<1
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	<1	1	0
Water	%	ASTM D6304	>0.2	0.098	0.083	0.069
ppm Water	ppm	ASTM D6304	>2000	989	830	693.3
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	816	14265	4905
Particles >6µm		ASTM D7647	>2500	198	1113	993
Particles >14µm		ASTM D7647	>320	14	89	61
Particles >21µm		ASTM D7647	>80	2	26	11
Particles >38μm		ASTM D7647	>20	0	4	1
Particles >71μm		ASTM D7647	>4	0	1	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11	21/17/14	19/17/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.05	0.052	0.088	0.064





OIL ANALYSIS REPORT

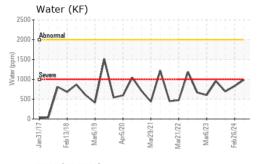


35k - 4j.	m					
30k14	μm					
20k -	11				٨	
30k - 5/- 25k - 14 20k - 15k - Abnormal	11					1
10k 0 5k	AL	1-1-1	^		11	V
0k 🗠 👓	- James	2		12		1
Jan31/17 Feb13/18	Mar6/19	Apr5/20	Mar29/2	Mar21/2	Mar6/23	Feb26/24

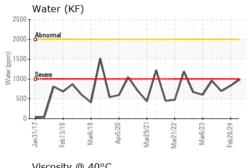





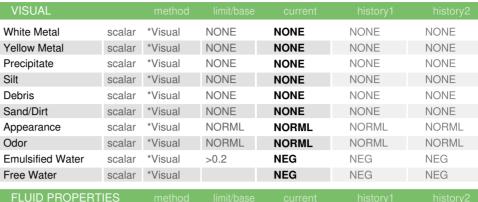


Visc @ 40°C	cSt	ASTM D445	49.7	50.0	50.7	48.6

$\sim \Lambda \Lambda$	иоі г	= 1644	CEC
$-\infty$		- IIVI <i>E</i>	AGES

Color

Bottom

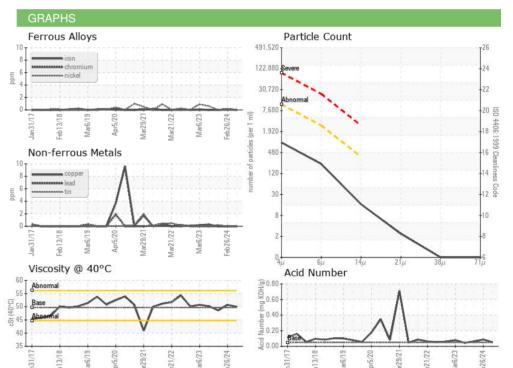





Laboratory

Sample No. Lab Number Unique Number : 11125701

: USPM37031 : 06236867

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 15 Jul 2024 **Tested** : 18 Jul 2024

Diagnosed : 18 Jul 2024 - Jonathan Hester

TYSON - WATERLOO - USP CODE TYSWATPRO

501 N Elk Run Road Waterloo, IA US 50703

Contact: ED ALBERT

T: (319)236-9328

Test Package : IND 2 Certificate 12367

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (319)236-9393 Contact/Location: ED ALBERT - IBPWAT01