




# OIL ANALYSIS REPORT



Area  
**COLORADO/443/EG - LOADER**  
 Machine Id  
**45.55L [COLORADO^443^EG - LOADER]**  
 Component  
**Rear Differential**  
 Fluid  
**MOBIL MOBILFLUID 424 (9 GAL)**

### Sample Rating Trend

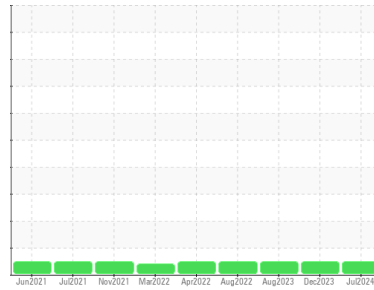

**NORMAL**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0928627</b>	WC0859590	WC0799106
Sample Date	Client Info		<b>10 Jul 2024</b>	07 Dec 2023	03 Aug 2023
Machine Age	hrs	Client Info	<b>4058</b>	3523	3029
Oil Age	hrs	Client Info	<b>0</b>	494	0
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	<b>41</b>	24	60
Chromium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	1	2
Lead	ppm	ASTM D5185m	>13	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>103	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>128</b>	114	123
Barium	ppm	ASTM D5185m		<b>0</b>	2	<1
Molybdenum	ppm	ASTM D5185m		<b>4</b>	3	6
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m		<b>20</b>	17	20
Calcium	ppm	ASTM D5185m		<b>3635</b>	3351	3668
Phosphorus	ppm	ASTM D5185m		<b>1149</b>	1104	1244
Zinc	ppm	ASTM D5185m		<b>1495</b>	1377	1580
Sulfur	ppm	ASTM D5185m		<b>4694</b>	4995	6170

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>100	<b>13</b>	11	13
Sodium	ppm	ASTM D5185m		<b>0</b>	0	9
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0

## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

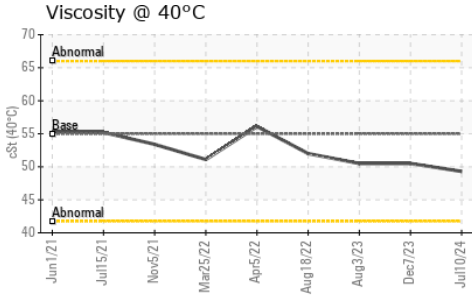




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	55	<b>49.3</b>	50.5	50.5
-------------	-----	-----------	----	-------------	------	------

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS
--------

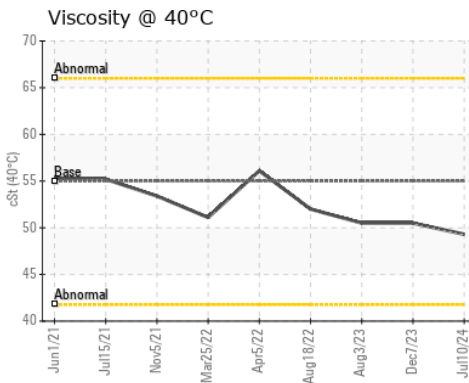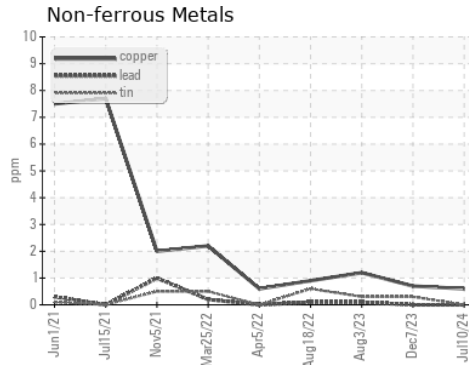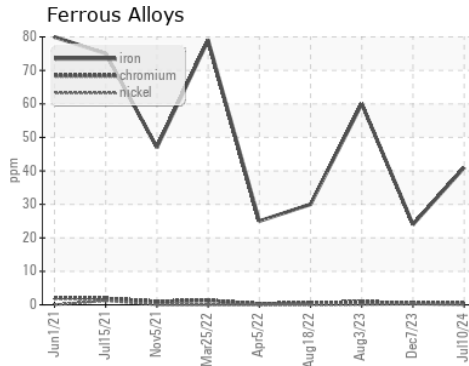

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0928627  
**Lab Number** : **06237118**  
**Unique Number** : 11125952  
**Test Package** : CONST

**Received** : 15 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Wes Davis

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)