




# OIL ANALYSIS REPORT

Area  
**OKLAHOMA/3/EG - TRUCK-OFF-HWY-HEAVY HAUL**  
 Machine Id  
**69.03 [OKLAHOMA^3^EG - TRUCK-OFF-HWY-HEAVY HAUL]**  
 Component  
**Rear Right Final Drive**  
 Fluid  
**MOBIL SHC 629 (--- GAL)**

## Sample Rating Trend

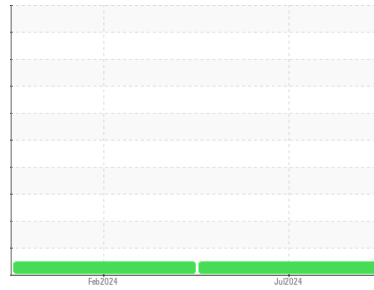

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0945651</b>	WC0873989	---
Sample Date	Client Info			<b>01 Jul 2024</b>	26 Feb 2024	---
Machine Age	hrs	Client Info		<b>2525</b>	1448	---
Oil Age	hrs	Client Info		<b>0</b>	1448	---
Oil Changed	Client Info			<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>800	<b>76</b>	61	---
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	1	---
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	1	---
Titanium	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>75	<b>&lt;1</b>	2	---
Lead	ppm	ASTM D5185m	>10	<b>3</b>	3	---
Copper	ppm	ASTM D5185m	>75	<b>29</b>	28	---
Tin	ppm	ASTM D5185m	>8	<b>5</b>	5	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>91</b>	112	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	3	---
Calcium	ppm	ASTM D5185m		<b>517</b>	408	---
Phosphorus	ppm	ASTM D5185m		<b>437</b>	378	---
Zinc	ppm	ASTM D5185m		<b>86</b>	68	---
Sulfur	ppm	ASTM D5185m		<b>16230</b>	13942	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>400	<b>18</b>	16	---
Sodium	ppm	ASTM D5185m		<b>6</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

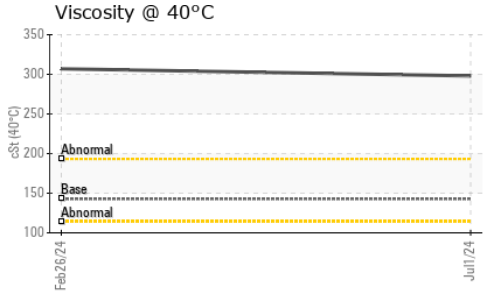




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	142.8	<b>298</b>	307	---
-------------	-----	-----------	-------	------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

### GRAPHS

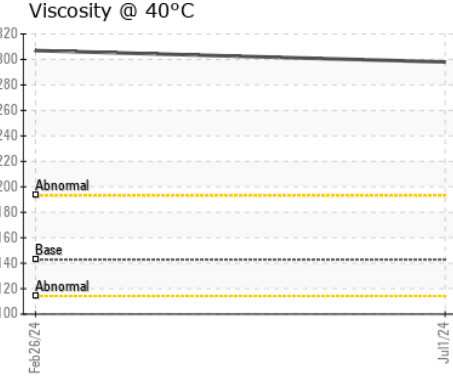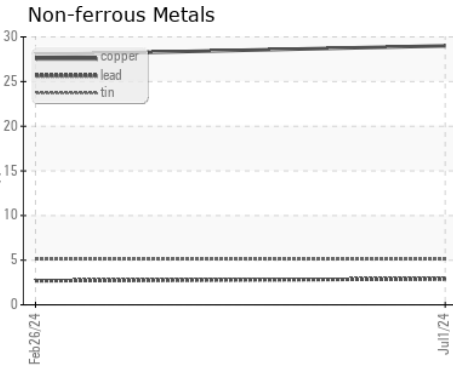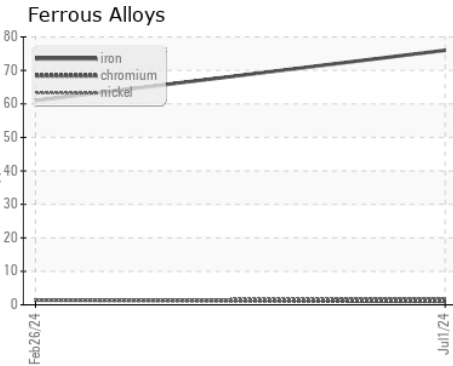

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0945651      **Received** : 15 Jul 2024  
**Lab Number** : **06237175**      **Tested** : 17 Jul 2024  
**Unique Number** : 11126009      **Diagnosed** : 17 Jul 2024 - Don Baldrige  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: BILL ORCUTT  
 william.orcutt@wildcat.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)