




OIL ANALYSIS REPORT

Sample Rating Trend

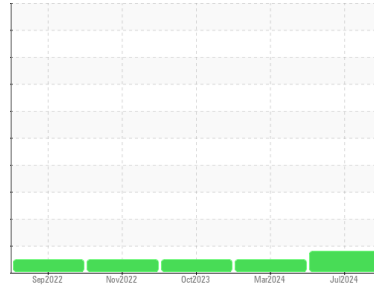

WEAR



Machine Id
5017
 Component
Main Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0003881	SBP0003821	SBP0000843
Sample Date	Client Info		09 Jul 2024	06 Mar 2024	09 Oct 2023
Machine Age	hrs	Client Info	3574	2833	2303
Oil Age	hrs	Client Info	500	500	300
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	▲ 93	45	44
Chromium	ppm	ASTM D5185m >8	3	1	2
Nickel	ppm	ASTM D5185m >2	2	<1	<1
Titanium	ppm	ASTM D5185m >3	0	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >15	3	1	2
Lead	ppm	ASTM D5185m >18	6	<1	2
Copper	ppm	ASTM D5185m >80	19	10	14
Tin	ppm	ASTM D5185m >14	2	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	6	9
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	75	62	56
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	1227	1042	942
Calcium	ppm	ASTM D5185m 1070	1431	1218	1153
Phosphorus	ppm	ASTM D5185m 1150	1323	1064	1003
Zinc	ppm	ASTM D5185m 1270	1661	1284	1231
Sulfur	ppm	ASTM D5185m 2060	3622	3471	3319

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	10	4	5
Sodium	ppm	ASTM D5185m >75	5	5	4
Potassium	ppm	ASTM D5185m >20	<1	<1	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	1	0.7	0.8
Nitration	Abs/cm	*ASTM D7624 >20	14.1	9.9	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	27.5	21.7	20.8


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	27.0	19.2	17.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.9	8.4	8.3




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

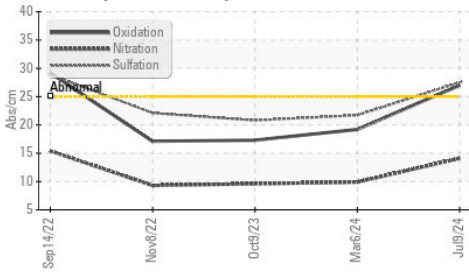


FT-IR (Direct Trend)

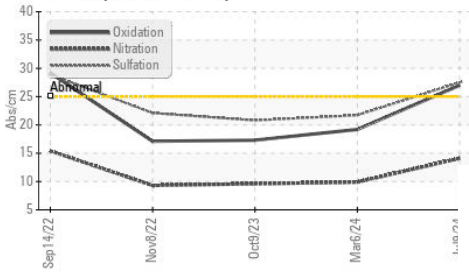

Base Number

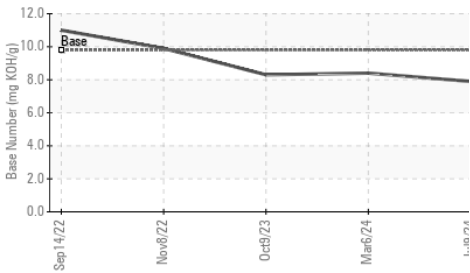

Viscosity @ 100°C

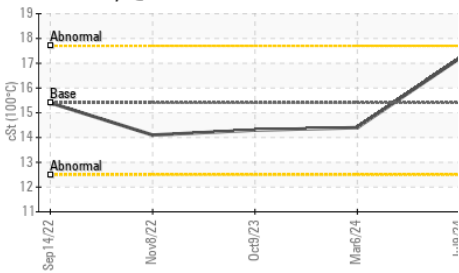


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	17.2	14.4

GRAPHS


▲ Ferrous Alloys

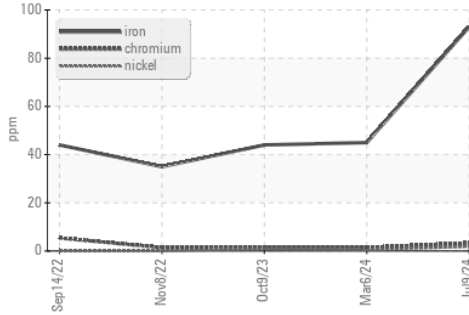


Non-ferrous Metals

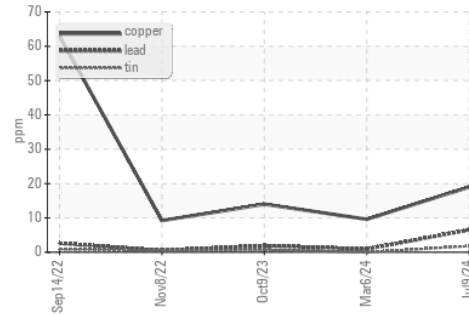

Viscosity @ 100°C

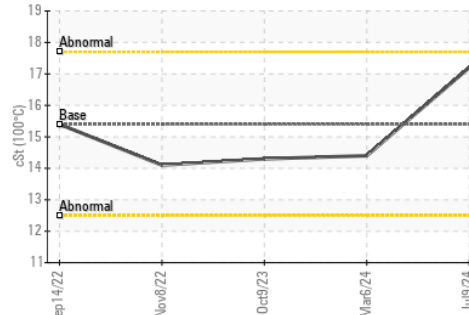

Base Number

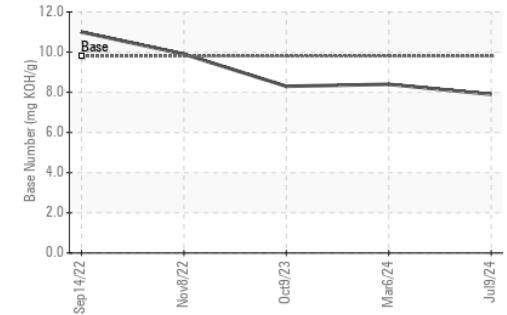

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0003881 **Received** : 15 Jul 2024
Lab Number : 06237281 **Tested** : 17 Jul 2024
Unique Number : 11126115 **Diagnosed** : 17 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

Western Sand and Gravel - 604602
 248 CO Road G
 Ashland, NE
 US 68003
 Contact: ZACH SPURLOCK
 zachs@westernsand.com
 T: (402)944-3084
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)