




OIL ANALYSIS REPORT

Sample Rating Trend

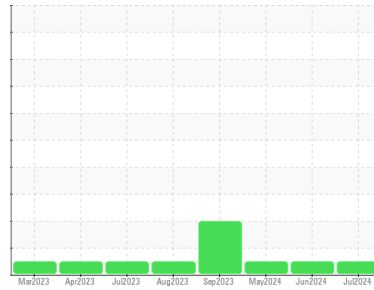

NORMAL



Machine Id

HPCG2

Component

Propane Engine

Fluid

PETRO CANADA SENTRON LD 8000 (120 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0793765 | WC0793763 | WC0793760 |
| Sample Date | Client Info | | 03 Jul 2024 | 03 Jun 2024 | 02 May 2024 |
| Machine Age | hrs | Client Info | 12365 | 11929 | 11220 |
| Oil Age | hrs | Client Info | 2702 | 2266 | 1557 |
| Oil Changed | Client Info | | Not Chngd | Not Chngd | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185m | >100 | 6 | 3 | 6 |
| Chromium | ppm | ASTM D5185m | >25 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >25 | 0 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >35 | 0 | <1 | <1 |
| Tin | ppm | ASTM D5185m | >8 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | <1 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|-------------|---------|-------------|----------|------|
| Boron | ppm | ASTM D5185m | | 0 | 3 | 2 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | <1 | 2 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 10 | 16 | 22 |
| Calcium | ppm | ASTM D5185m | 1351 | 1661 | 1679 | 1535 |
| Phosphorus | ppm | ASTM D5185m | 302 | 319 | 346 | 295 |
| Zinc | ppm | ASTM D5185m | 358 | 400 | 431 | 387 |
| Sulfur | ppm | ASTM D5185m | 2758 | 3553 | 3783 | 3254 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|-------------|---------|----------|----------|----|
| Silicon | ppm | ASTM D5185m | >50 | 2 | 2 | 4 |
| Sodium | ppm | ASTM D5185m | | 3 | 3 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 2 | 3 |

INFRA-RED

| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | *ASTM D7844 | | 0.1 | 0.1 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.4 | 6.1 | 5.6 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.2 | 20.4 | 19.6 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 15.5 | 14.4 | 13.5 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.86 | --- | 1.51 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 4.64 | 2.1 | 2.5 | 2.6 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

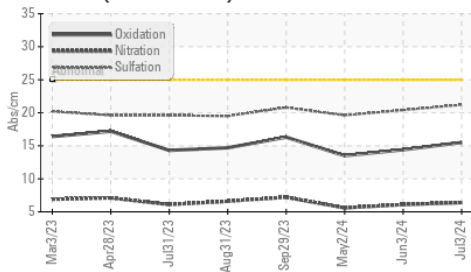


Base Number

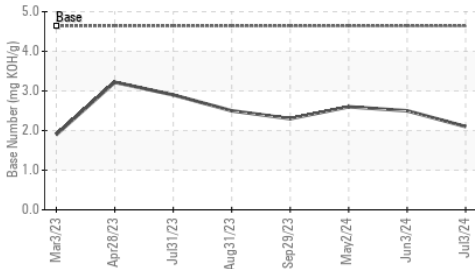

Viscosity @ 100°C

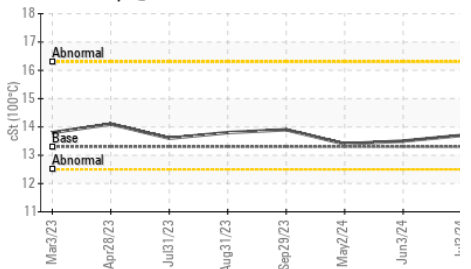

Acid Number

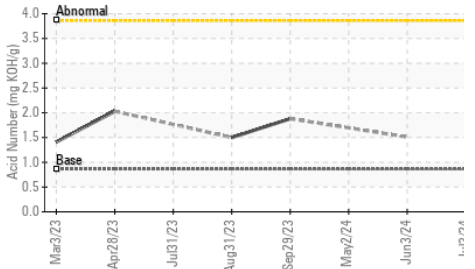


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 13.3 | 13.7 | 13.5 |

GRAPHS


Ferrous Alloys

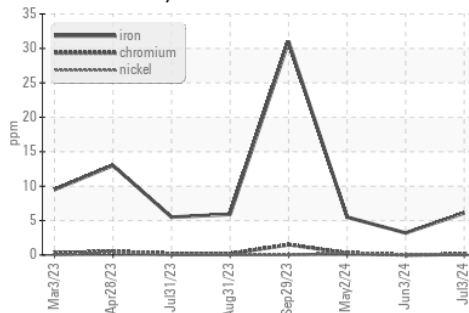


Non-ferrous Metals

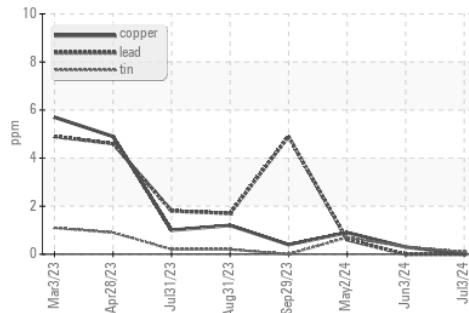

Viscosity @ 100°C

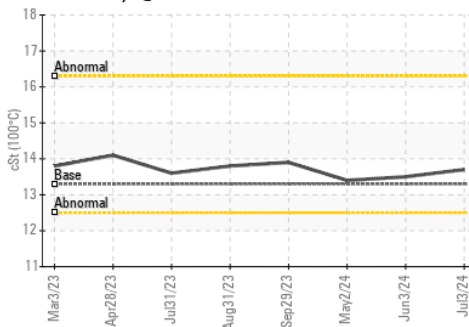

Acid Number

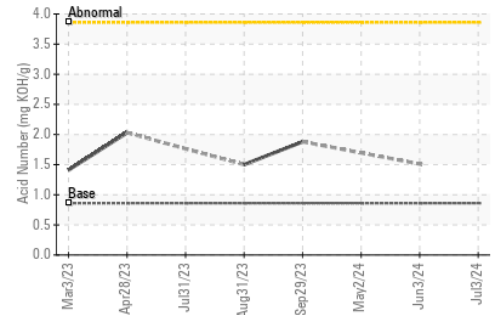

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0793765

Lab Number : 06237290

Unique Number : 11126124

Test Package : FLEET

Received : 15 Jul 2024

Tested : 18 Jul 2024

Diagnosed : 18 Jul 2024 - Jonathan Hester

ACCURATE SOLUTIONS

PO BOX 6014

MAYAGUEZ, ZJ

PR 00681

Contact: ROBERTO ACOSTA

racosta@accurate.works

T: (787)833-2658

F: (787)832-4486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)