




# OIL ANALYSIS REPORT

Sample Rating Trend

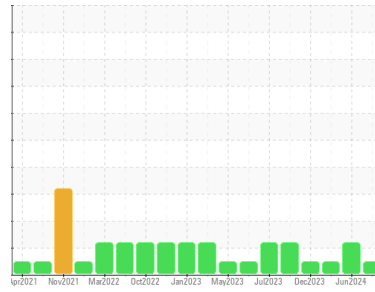

**NORMAL**



Machine Id

**KENWORTH 3108**

Component

**Diesel Engine**

Fluid

**CHEVRON DELO 400 XLE 10W30 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0945944</b>	WC0906878	WC0863336
Sample Date	Client Info		<b>09 Jul 2024</b>	22 Jun 2024	30 Dec 2023
Machine Age	mls	Client Info	<b>503100</b>	498259	431939
Oil Age	mls	Client Info	<b>497815</b>	38675	421291
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>6</b>	22	5
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	11	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	4	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>52</b>	20	55
Barium	ppm	ASTM D5185m		<b>0</b>	<1	10
Molybdenum	ppm	ASTM D5185m		<b>3</b>	17	6
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>718</b>	763	676
Calcium	ppm	ASTM D5185m	2900	<b>1464</b>	1519	1269
Phosphorus	ppm	ASTM D5185m	1100	<b>800</b>	709	777
Zinc	ppm	ASTM D5185m	1200	<b>857</b>	877	768
Sulfur	ppm	ASTM D5185m	4000	<b>3635</b>	2630	3512

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	8	4
Sodium	ppm	ASTM D5185m		<b>20</b>	91	39
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	12	10

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.6	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	10.3	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	25.6	19.1


## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	20.6	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	<b>7.6</b>	5.0	7.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

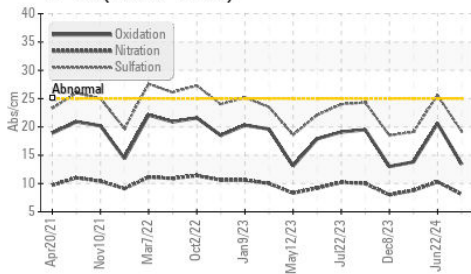

Base Number

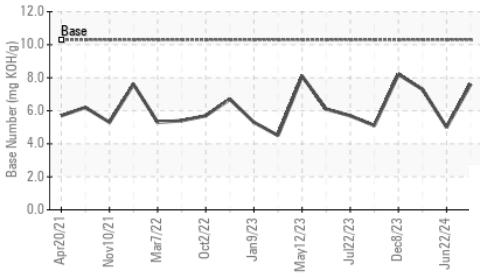

Viscosity @ 100°C

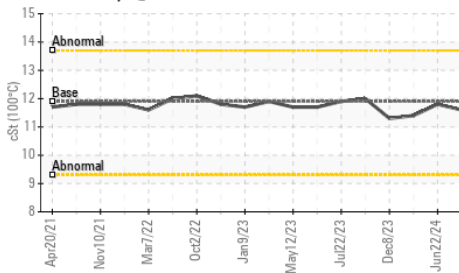


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.6	11.8

## GRAPHS


Ferrous Alloys

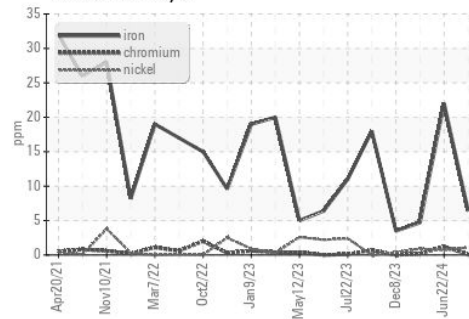


Non-ferrous Metals

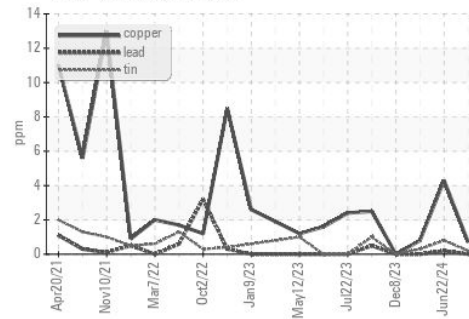

Viscosity @ 100°C

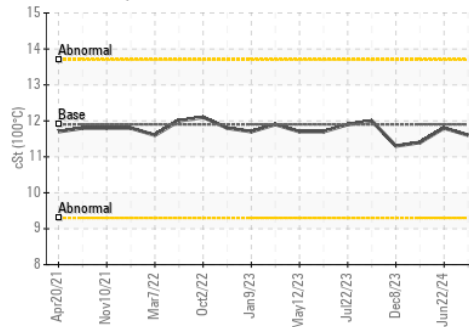

Base Number

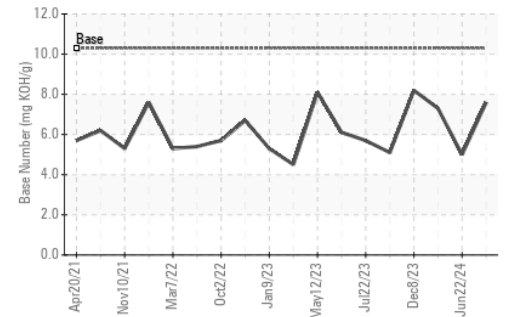

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0945944  
 Lab Number : 06237409  
 Unique Number : 11126243  
 Test Package : FLEET

Received : 15 Jul 2024  
 Tested : 17 Jul 2024  
 Diagnosed : 17 Jul 2024 - Wes Davis

LTI/MILKY WAY - SUNNYSIDE  
 333 MIDVALE RD  
 SUNNYSIDE, WA  
 US 98944

Contact: Barbara Kluever  
 bkluever@lynden.com

T: (509)839-5844

F: (509)839-6556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)