




OIL ANALYSIS REPORT

Area
CONSTRUCTORS, INC
 Machine Id
13-1716
 Component
Diesel Engine
 Fluid
MOBIL MOBIL1 10W30 (--- GAL)

Sample Rating Trend

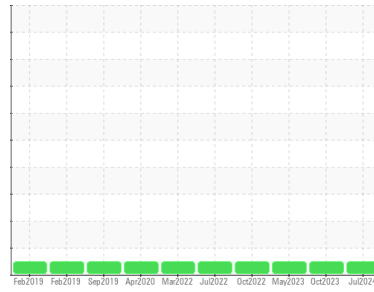

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			SBP0007092	SBP0004941	SBP0004429
Sample Date	Client Info			11 Jul 2024	19 Oct 2023	24 May 2023
Machine Age	hrs Client Info			9821	9288	8793
Oil Age	hrs Client Info			533	495	598
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	15	20	25
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	3	3
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	1	2
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	1	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		59	56	64
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		996	928	959
Calcium	ppm	ASTM D5185m		1194	1068	1176
Phosphorus	ppm	ASTM D5185m		1098	985	1049
Zinc	ppm	ASTM D5185m		1281	1223	1292
Sulfur	ppm	ASTM D5185m		3769	2872	3482

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	4	3
Sodium	ppm	ASTM D5185m		4	4	0
Potassium	ppm	ASTM D5185m	>20	2	3	1


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	6.8	8.1	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.1	18.3	18.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	15.2	15.7
Base Number (BN)	mg KOH/g	ASTM D2896		8.4	7.6	8.0




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

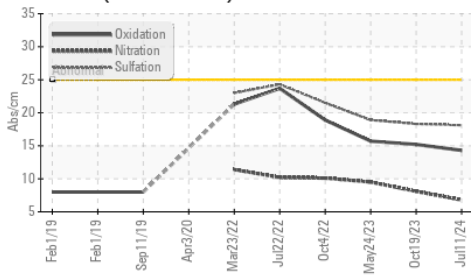

Base Number

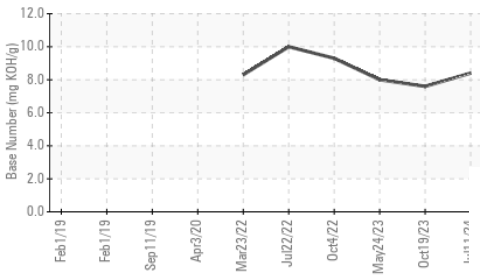

Viscosity @ 100°C

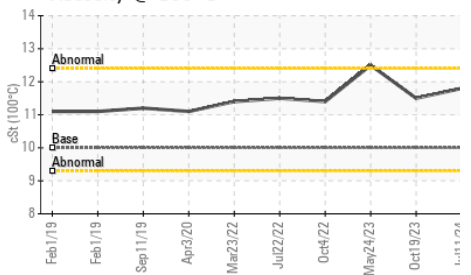


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 10	11.8	11.5	12.5

GRAPHS


Ferrous Alloys

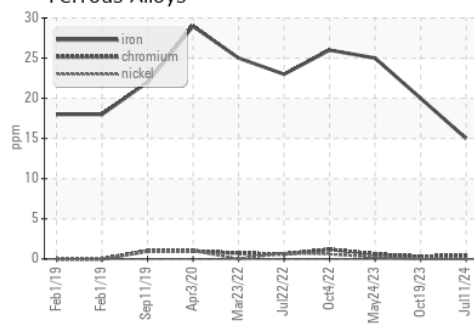


Non-ferrous Metals

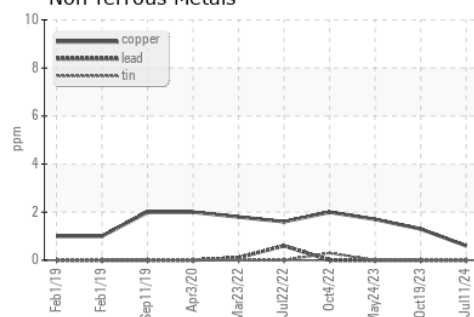

Viscosity @ 100°C

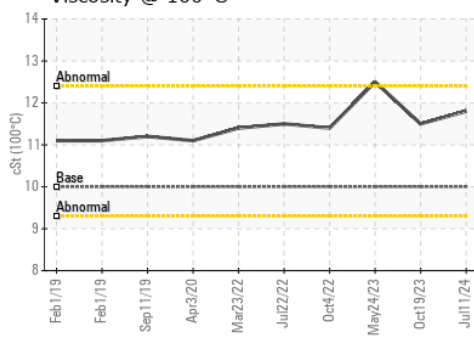

Base Number

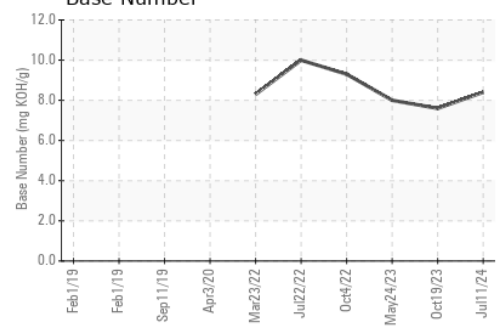

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007092 **Received** : 15 Jul 2024
Lab Number : 06237421 **Tested** : 16 Jul 2024
Unique Number : 11126255 **Diagnosed** : 18 Jul 2024 - Jonathan Hester
Test Package : FLEET

Constructors Inc. - 603659
 6500 N 70TH ST
 LINCOLN, NE
 US 68507
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)