


# OIL ANALYSIS REPORT

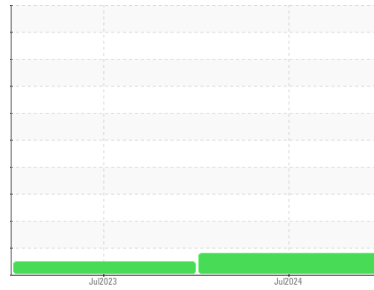

Machine Id  
**JOHN DEERE 750J 6X25 (S/N T0750JX130818)**  
Component  
**Diesel Engine**  
Fluid  
**XTREME 15W40 (--- QTS)**

### Sample Rating Trend


**WEAR**


### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### ▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0197056</b>	JR0141078	---
Sample Date	Client Info		<b>12 Jul 2024</b>	07 Jul 2023	---
Machine Age	hrs	Client Info	<b>1823</b>	1725	---
Oil Age	hrs	Client Info	<b>1598</b>	1598	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	<b>▲ 56</b>	28	---
Chromium	ppm	ASTM D5185m >11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >31	<b>3</b>	2	---
Lead	ppm	ASTM D5185m >26	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >26	<b>&lt;1</b>	0	---
Tin	ppm	ASTM D5185m >4	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>393</b>	553	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>119</b>	121	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	<b>520</b>	579	---
Calcium	ppm	ASTM D5185m	<b>1538</b>	1609	---
Phosphorus	ppm	ASTM D5185m	<b>999</b>	1089	---
Zinc	ppm	ASTM D5185m	<b>1193</b>	1411	---
Sulfur	ppm	ASTM D5185m	<b>3789</b>	4754	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >22	<b>7</b>	5	---
Sodium	ppm	ASTM D5185m >31	<b>2</b>	0	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	---

### INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	7.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	20.9	---

### FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.4</b>	15.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.4</b>	8.3	---

# OIL ANALYSIS REPORT


### ▲ Ferrous Alloys

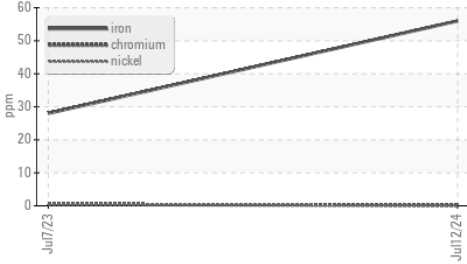


### FT-IR (Direct Trend)

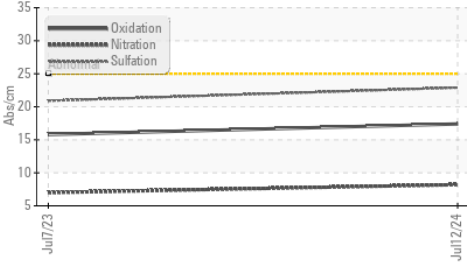

### Base Number

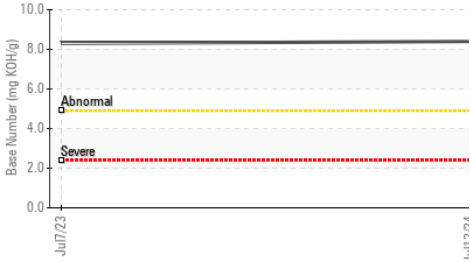

### Viscosity @ 100°C

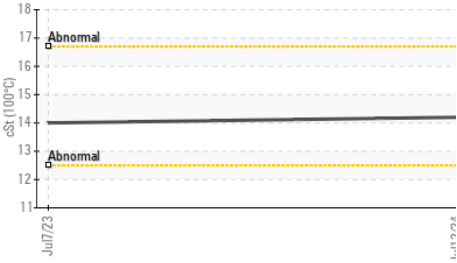


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.2</b>	14.0	---

### GRAPHS

#### ▲ Iron (ppm)

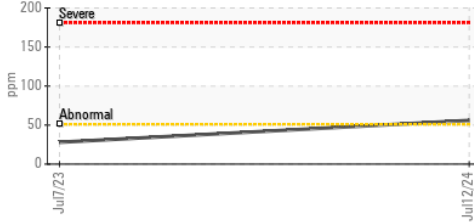


#### Lead (ppm)



#### Aluminum (ppm)



#### Chromium (ppm)

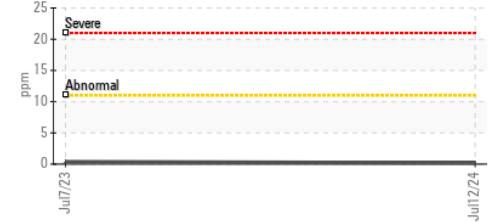


#### Copper (ppm)




#### Silicon (ppm)



#### Viscosity @ 100°C

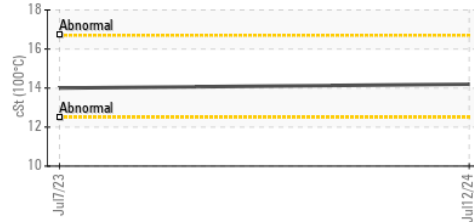

#### Base Number

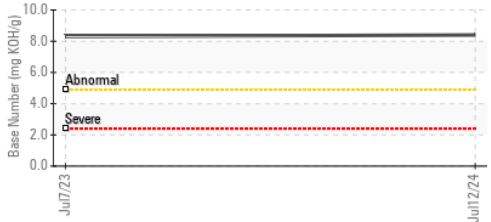

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0197056

**Lab Number** : 06237550

**Unique Number** : 11126384

**Test Package** : MOBCE ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Received** : 16 Jul 2024

**Tested** : 17 Jul 2024

**Diagnosed** : 18 Jul 2024 - Sean Felton

**NC FOREST SERVICE**

221 AIRPORT RD

FAYETTEVILLE, NC

US 28306

Contact: WALTER CAPPS

WATER.CAPPS@NCAGR.GOV

T:

F: