




OIL ANALYSIS REPORT

Sample Rating Trend

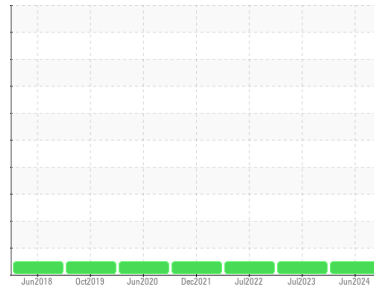

NORMAL



Machine Id
E110216877 - WESTCHESTER CO PEEKSKILL E110216877
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (100 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0921615	WC0799850	WC0699526
Sample Date	Client Info	25 Jun 2024	06 Jul 2023	09 Jul 2022
Machine Age	hrs	418	390	339
Oil Age	hrs	0	0	40
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<1	1	1
Chromium	ppm ASTM D5185m >20	<1	0	<1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	3	<1	<1
Lead	ppm ASTM D5185m >40	0	0	<1
Copper	ppm ASTM D5185m >330	1	2	<1
Tin	ppm ASTM D5185m >15	0	<1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	11	2	5
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	56	61	58
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m 450	870	1023	951
Calcium	ppm ASTM D5185m 3000	1141	1139	1115
Phosphorus	ppm ASTM D5185m 1150	879	1109	1001
Zinc	ppm ASTM D5185m 1350	1189	1342	1224
Sulfur	ppm ASTM D5185m 4250	2886	4112	3838

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	2	3
Sodium	ppm ASTM D5185m >158	<1	2	<1
Potassium	ppm ASTM D5185m >20	1	0	<1

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0	0.1	0
Nitration	Abs/cm *ASTM D7624 >20	4.7	4.7	4.9
Sulfation	Abs/.1mm *ASTM D7415 >30	17.2	17.6	18.8


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.6	13.6	13.8
Base Number (BN)	mg KOH/g ASTM D2896 8.5	9.8	10.0	10.9




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

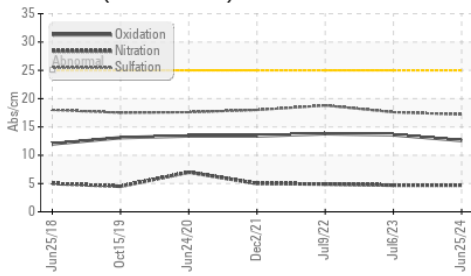

Base Number

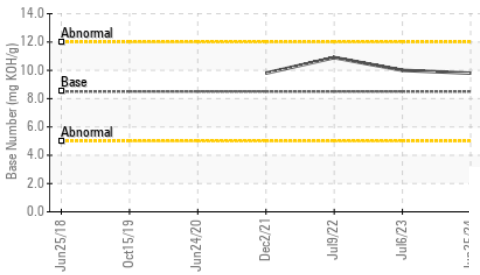









Viscosity @ 100°C

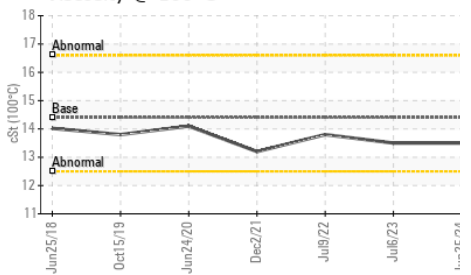

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.8

GRAPHS

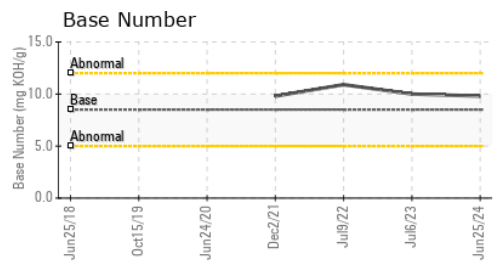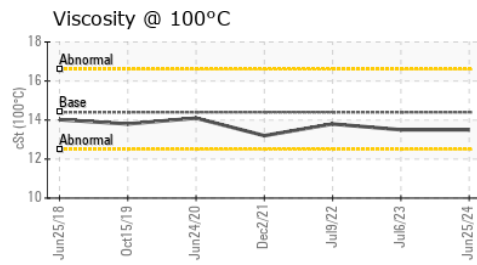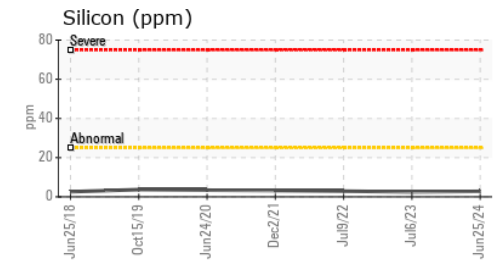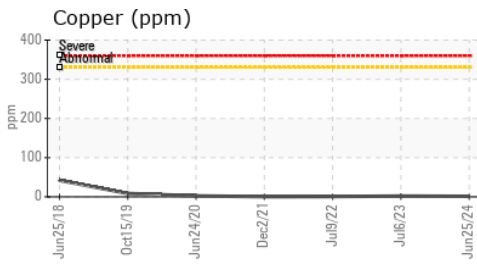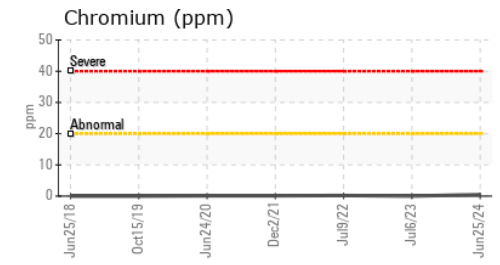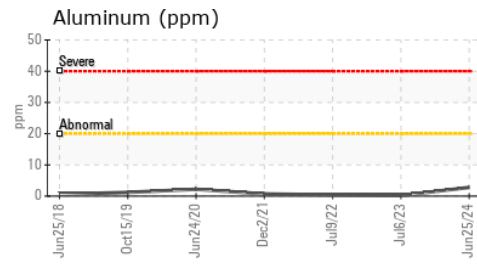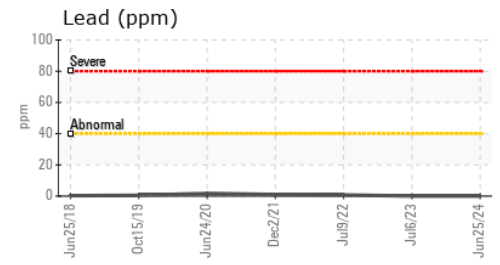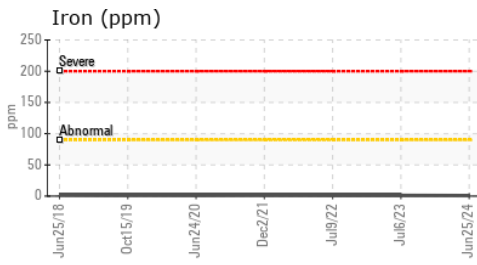

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0921615 **Received** : 16 Jul 2024
Lab Number : 06237610 **Tested** : 17 Jul 2024
Unique Number : 11126444 **Diagnosed** : 17 Jul 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

GEN TECH LTD
 3017 RT 9W
 NEW WINDSOR, NY
 US 12553
 Contact: JOE SAYEGH
 joe@gentechltd.com
 T: (845)568-0500
 F: (845)568-3073

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)