




OIL ANALYSIS REPORT

Sample Rating Trend

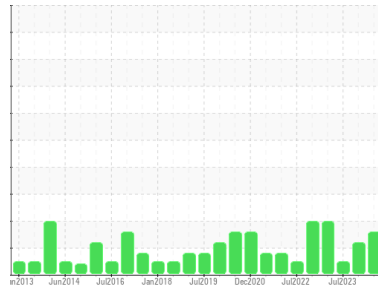

ISO



Area

[604346647 SR]

Machine Id

K REFINER 4 (S/N 20069501)

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0854397	WC0854148	WC0605541
Sample Date	Client Info		28 Jun 2024	14 Dec 2023	17 Jul 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	0
Chromium	ppm	ASTM D5185m	>20	0	0
Nickel	ppm	ASTM D5185m	>20	0	<1
Titanium	ppm	ASTM D5185m		0	<1
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>20	0	0
Lead	ppm	ASTM D5185m	>20	0	0
Copper	ppm	ASTM D5185m	>20	0	<1
Tin	ppm	ASTM D5185m	>20	0	0
Vanadium	ppm	ASTM D5185m		0	<1
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0
Barium	ppm	ASTM D5185m	5	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0
Manganese	ppm	ASTM D5185m		0	<1
Magnesium	ppm	ASTM D5185m	25	<1	1
Calcium	ppm	ASTM D5185m	200	2	3
Phosphorus	ppm	ASTM D5185m	300	231	235
Zinc	ppm	ASTM D5185m	370	5	11
Sulfur	ppm	ASTM D5185m	2500	2201	1922

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	3	3
Sodium	ppm	ASTM D5185m		<1	0
Potassium	ppm	ASTM D5185m	>20	0	2

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 39909	▲ 33957	4341
Particles >6µm	ASTM D7647	>1300	▲ 10690	▲ 5744	1108
Particles >14µm	ASTM D7647	>160	▲ 196	87	64
Particles >21µm	ASTM D7647	>40	29	17	14
Particles >38µm	ASTM D7647	>10	5	2	1
Particles >71µm	ASTM D7647	>3	0	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 22/21/15	▲ 22/20/14	19/17/13

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.88	0.89

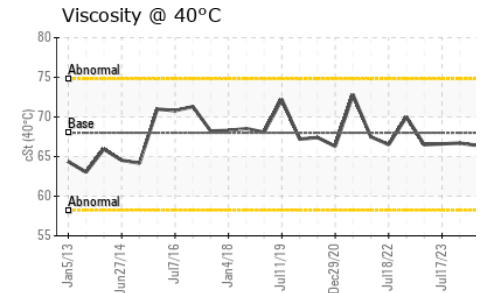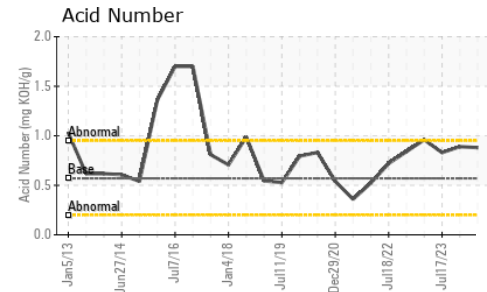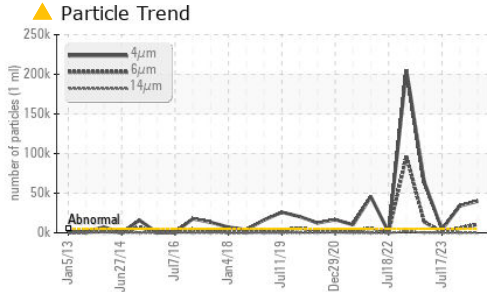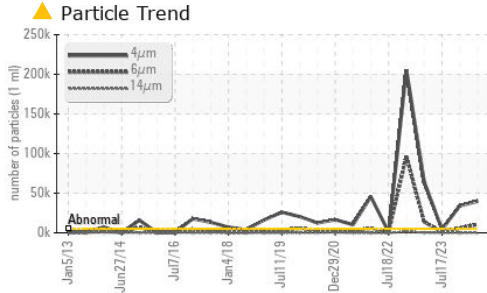






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	66.4	66.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

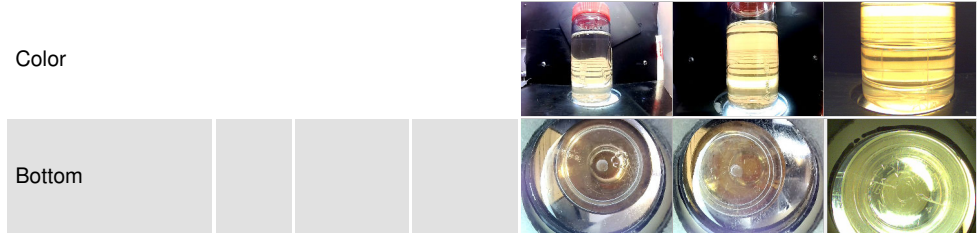

GRAPHS

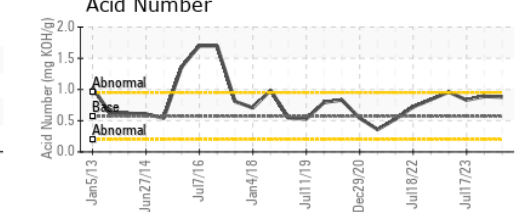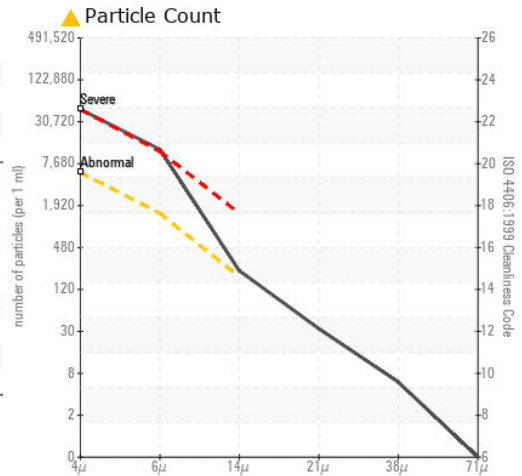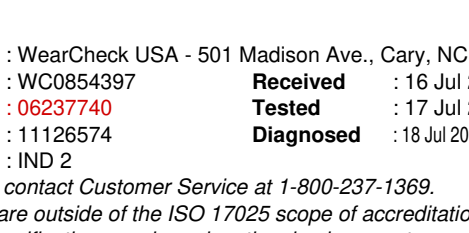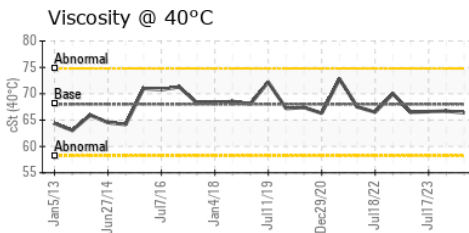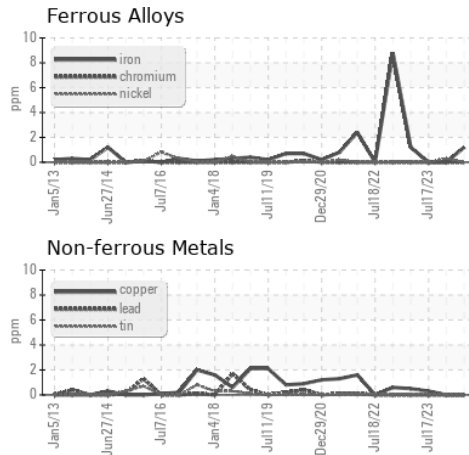

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0854397
Lab Number : 06237740
Unique Number : 11126574
Test Package : IND 2

MARS CHOCOLATE
 2019 NORTH OAK PARK
 CHICAGO, IL
 US 60707
 Contact: TONY FIORE
 tony.fiore@effem.com
 T: (773)745-2279
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)