

## **OIL ANALYSIS REPORT**

### HOTLINE/120 MILL Machine Id 120 #2 REEL MTR CENTER BRG 1415-037-0092

Center Bearing

Fluid ROYAL PURPLE SYNFILM GT 68 (20 GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 📥 Wear


The lead level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KFS0004504	KFS0004874	KFS0002094
Sample Date		Client Info		12 Jul 2024	19 Dec 2023	03 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	<1
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	2	2
Lead	ppm	ASTM D5185m	>20	<u> </u>	<b>A</b> 23	8
Copper	ppm	ASTM D5185m	>20	0	0	0
Tin	ppm	ASTM D5185m	>20	<1	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	74	99	88
Calcium	ppm	ASTM D5185m		0	3	2
Phosphorus	ppm	ASTM D5185m		6	30	<1
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m		21648	21175	20303
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	1	1
Sodium	ppm	ASTM D5185m		<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	<1	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	170	17207	▲ 97227
Particles >6µm		ASTM D7647	>2500	28	1420	<b>A</b> 22103
Particles >14µm		ASTM D7647	>160	3	63	<b>9</b> 98
Particles >21µm		ASTM D7647	>40	1	22	<b>1</b> 83
Particles >38µm		ASTM D7647	>10	0	2	10
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/18/14	15/12/9	21/18/13	▲ 24/22/17
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
FLUID DEGRADA Acid Number (AN)	ATION mg KOH/g	method ASTM D8045	limit/base	current 0.33	history1 0.39	history2 0.34


Report Id: CONMUSAL [WUSCAR] 06237744 (Generated: 07/18/2024 12:35:35) Rev: 1


Submitted By: COLD MILL - Josh Edwards Page 1 of 2




# **OIL ANALYSIS REPORT**



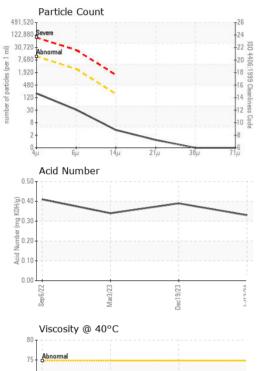






Ē

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	67.0	68.0	68.1
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						<u>U</u>

Bottom

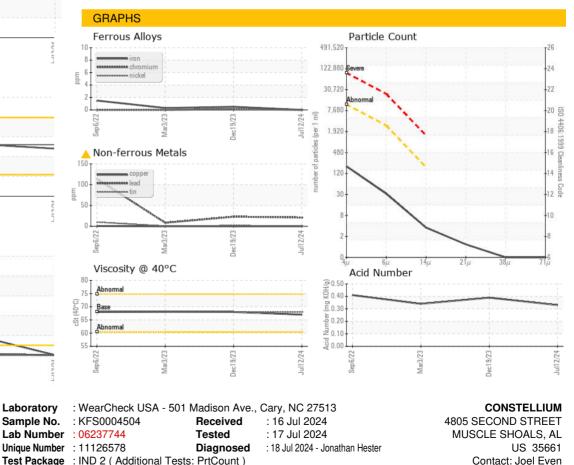

Test Package : IND 2 (Additional Tests: PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONMUSAL [WUSCAR] 06237744 (Generated: 07/18/2024 12:35:35) Rev: 1

Certificate 12367

Submitted By: COLD MILL - Josh Edwards

joel.even@constellium.com

F:

T: (256)740-7490