

# **OIL ANALYSIS REPORT**

## HOTLINE/120 MILL Machine Id 120 #2 REEL MTR SOUTH BRG 1415-037-0091

South Bearing

Fluid ROYAL PURPLE SYNFILM GT 68 (20 GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### A Wear


The lead level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

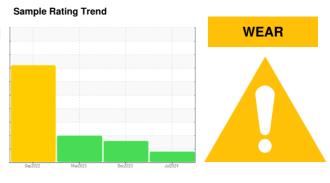


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		KFS0004397	KFS0004875	KFS0002095		
Sample Date		Client Info		12 Jul 2024	19 Dec 2023	03 Mar 2023		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL		
CONTAMINATION		method	limit/base	current	history1	history2		
Water		WC Method	>2	NEG	NEG	NEG		
WEAR METALS		method	limit/base	current	history1	history2		
ron	ppm	ASTM D5185m	>20	0	<1	<1		
Chromium	ppm	ASTM D5185m		0	<1	0		
Nickel	ppm	ASTM D5185m	>20	0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m		0	0	0		
Aluminum	ppm	ASTM D5185m	>20	0	2	<1		
Lead	ppm	ASTM D5185m	>20	▲ 28	∠ ▲ 34	13		
Copper	ppm	ASTM D5185m		0	0	0		
Tin		ASTM D5185m	>20	۰ <1	3	1		
/anadium	ppm	ASTM D5185m	220	0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
	ppm			-	-			
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Vagnesium	ppm	ASTM D5185m	90	74	101	87		
Calcium	ppm	ASTM D5185m		<1	3	2		
Phosphorus	ppm	ASTM D5185m		4	30	2		
Zinc	ppm	ASTM D5185m		0	0	0		
Sulfur	ppm	ASTM D5185m		20753	20287	20216		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	<1	2	1		
Sodium	ppm	ASTM D5185m		<1	<1	1		
Potassium	ppm	ASTM D5185m	>20	0	<1	0		
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	596	<b>2</b> 6904	▲ 54937		
Particles >6µm		ASTM D7647	>2500	123	1505	<b>A</b> 8458		
Particles >14µm		ASTM D7647	>160	4	42	<b>A</b> 397		
Particles >21µm		ASTM D7647	>40	1	11	<b>1</b> 79		
Particles >38µm		ASTM D7647	>10	1	1	7		
Particles >71µm		ASTM D7647	>3	1	0	0		
Dil Cleanliness		ISO 4406 (c)	>20/18/14	16/14/9	▲ 22/18/13	▲ 23/20/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
	mg KOH/g	ASTM D8045		0.35	0.37	0.35		
35:57) Bev: 1					Submitted By: COLD MILL - Josh Edwards			


Report Id: CONMUSAL [WUSCAR] 06237745 (Generated: 07/18/2024 12:35:57) Rev: 1

Submitted By: COLD MILL - Josh Edwards Page 1 of 2



# **OIL ANALYSIS REPORT**

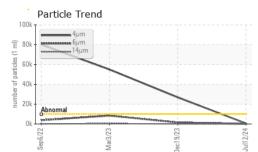

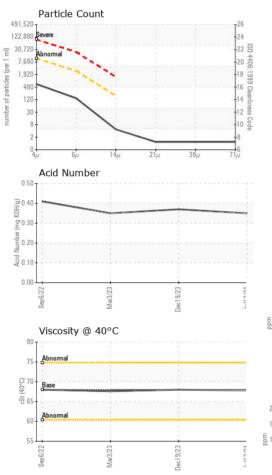

100

Ē 80

cles (1 60

÷ 40


20

0

Abnorma

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	67.8	68.0	67.6
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						U

Bottom

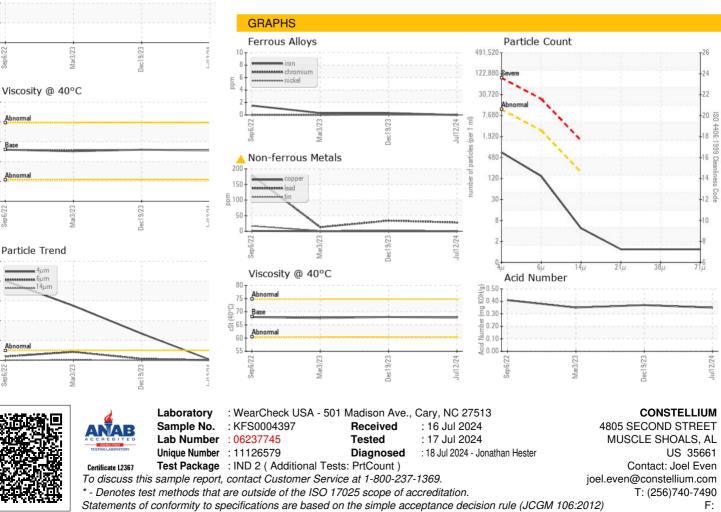

Report Id: CONMUSAL [WUSCAR] 06237745 (Generated: 07/18/2024 12:35:57) Rev: 1

Submitted By: COLD MILL - Josh Edwards