

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **15 15** Component **Gearbox** Fluid **{not provided} (--- GAL)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--|------------|-------------|----------|----------|
| Sample Number | | Client Info | | KFS0004551 | | |
| Sample Date | | Client Info | | 12 Jul 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.2 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 0 | | |
| Chromium | ppm | ASTM D5185m | >15 | 0 | | |
| Nickel | ppm | ASTM D5185m | >15 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >25 | 0 | | |
| Lead | ppm | ASTM D5185m | >100 | 4 | | |
| Copper | ppm | ASTM D5185m | >200 | 0 | | |
| Tin | ppm | ASTM D5185m | >25 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 82 | | |
| Calcium | ppm | ASTM D5185m | | 0 | | |
| Phosphorus | ppm | ASTM D5185m | | 0 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 21001 | | |
| CONTAMINANTS | 6 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | <1 | | |
| Sodium | ppm | ASTM D5185m | | <1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID CLEANLIN | NESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | 160 | | |
| Particles >6µm | | ASTM D7647 | >5000 | 19 | | |
| Particles >14µm | | ASTM D7647 | >640 | 2 | | |
| Particles >21µm | | ASTM D7647 | >160 | 1 | | |
| Particles >38µm | | ASTM D7647 | >40 | 0 | | |
| Particles >71µm | | ASTM D7647 | >10 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 14/11/9 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.35 | | |
| 2:52:38) Rev: 1 | | Contact/Location: CONSTELLIUM - Randy Nichols - CONMUSAL | | | | |


Report Id: CONMUSAL [WUSCAR] 06237749 (Generated: 07/18/2024 12:52:38) Rev: 1


Contact/Location: CONSTELLIUM - Randy Nichols - CONMUSAL




OIL ANALYSIS REPORT





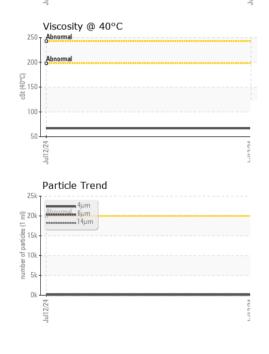

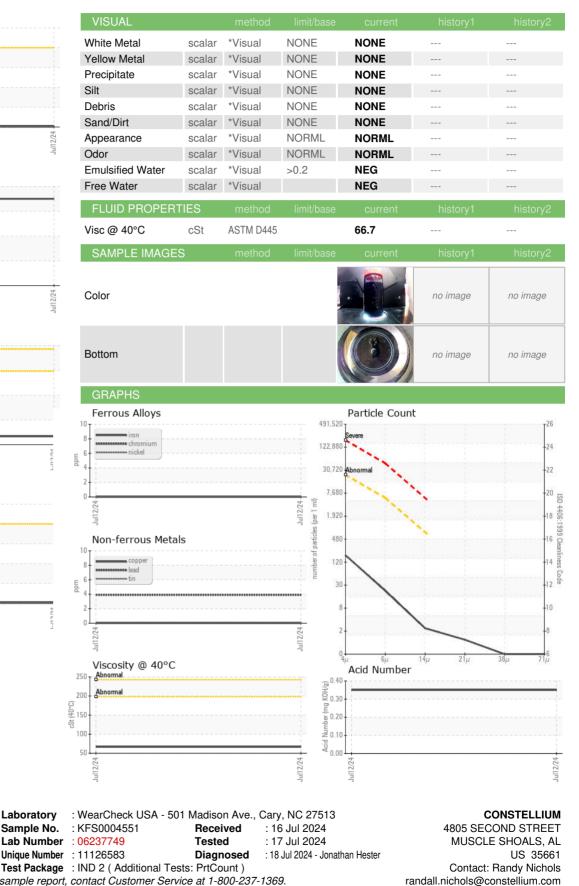

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate 12367

Laboratory

Sample No.

Contact/Location: CONSTELLIUM - Randy Nichols - CONMUSAL

E:

T: (256)386-6956