




# OIL ANALYSIS REPORT

## Sample Rating Trend

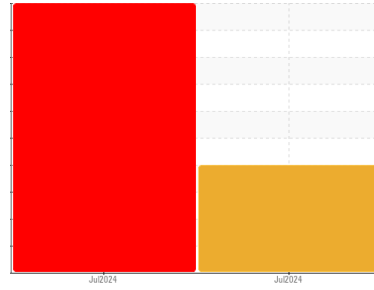

WATER



Area

[CONHER]

Machine Id

UM - VDA Molino de bolas TOTEM

Component

Hydraulic System

Fluid

NOCOLUB-MOBILGEAR 600 XP 460 (--- GAL)

### DIAGNOSIS

#### Recommendation

We advise that you check for the source of water entry. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. ( Customer Sample Comment: Sample #1 before filtration )

#### Wear

The iron level is abnormal. The lead level is abnormal.

#### Contamination

There is a light concentration of water present in the oil. There is a moderate amount of visible silt present in the sample.

#### Fluid Condition

The AN level is acceptable for this fluid.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0014616	KL0014617	---
Sample Date	Client Info		11 Jul 2024	11 Jul 2024	---
Machine Age	mths	Client Info	0	0	---
Oil Age	mths	Client Info	3	3	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	SEVERE	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	▲ 40	19	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >10	0	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >10	2	<1	---
Lead	ppm	ASTM D5185m >10	▲ 43	▲ 27	---
Copper	ppm	ASTM D5185m >75	<1	0	---
Tin	ppm	ASTM D5185m >10	4	2	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	0	---
Magnesium	ppm	ASTM D5185m	4	2	---
Calcium	ppm	ASTM D5185m	15	19	---
Phosphorus	ppm	ASTM D5185m	357	346	---
Zinc	ppm	ASTM D5185m	11	130	---
Sulfur	ppm	ASTM D5185m	12479	9654	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	15	8	---
Sodium	ppm	ASTM D5185m	4	2	---
Potassium	ppm	ASTM D5185m >20	<1	0	---
Water	%	ASTM D6304 >0.1	▲ 0.212	---	---
ppm Water	ppm	ASTM D6304 >1000	▲ 2120	---	---

### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		---	130406	---
Particles >6µm	ASTM D7647	>1300	---	▲ 73732	---
Particles >14µm	ASTM D7647	>160	---	▲ 1904	---
Particles >21µm	ASTM D7647	>40	---	▲ 138	---
Particles >38µm	ASTM D7647	>10	---	2	---
Particles >71µm	ASTM D7647	>3	---	0	---
Oil Cleanliness	ISO 4406 (c)	>17/14	---	▲ 23/18	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.69	0.54	---




# OIL ANALYSIS REPORT

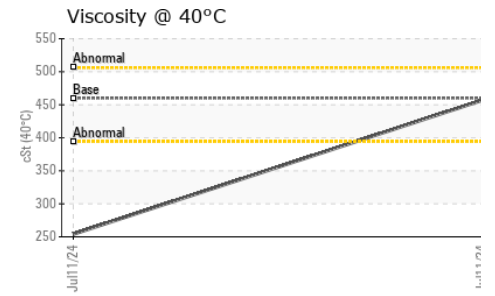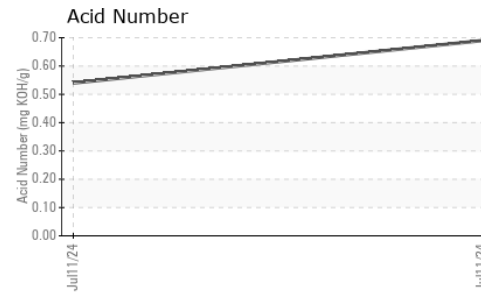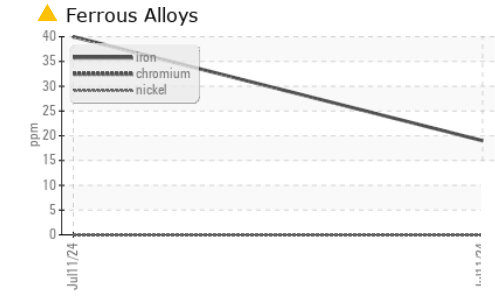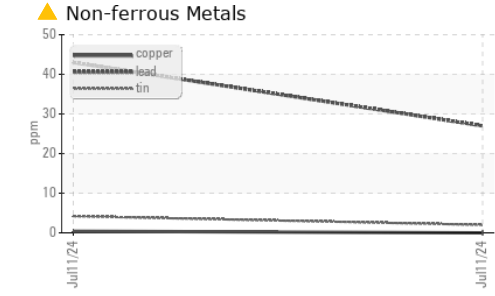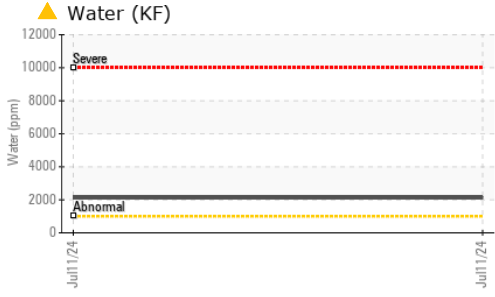





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	▲ MODER	LIGHT
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	0.2%	NEG
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 460	457	▲ 254	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

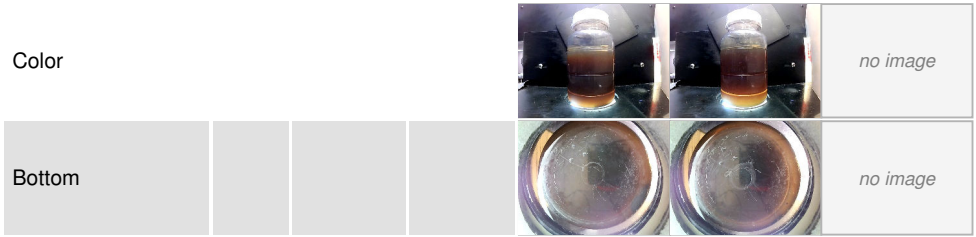

## GRAPHS

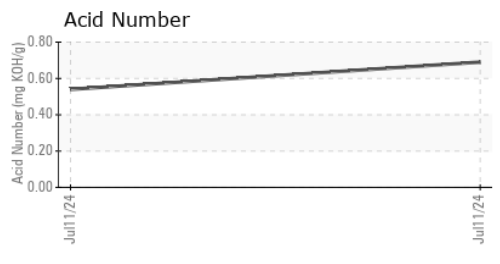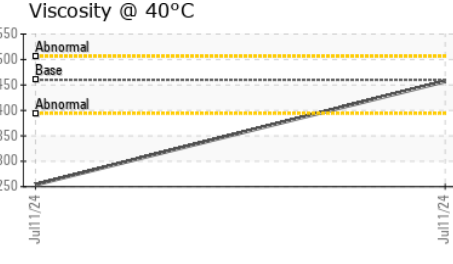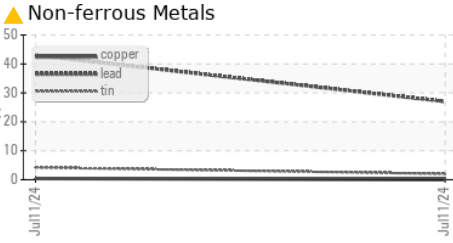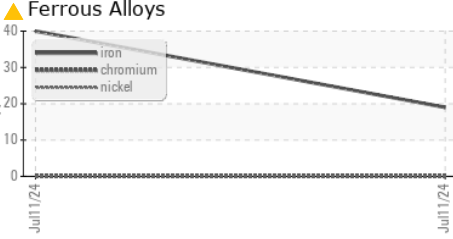

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014616      **Received** : 16 Jul 2024  
**Lab Number** : 06237757      **Tested** : 18 Jul 2024  
**Unique Number** : 11126591      **Diagnosed** : 18 Jul 2024 - Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: KF )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140

Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81

F: x: