




OIL ANALYSIS REPORT

Sample Rating Trend

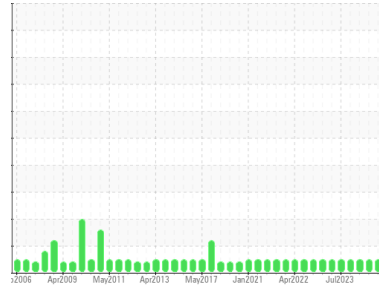

NORMAL



Area
SPLITTER 1
Machine Id
078CM12002
Component
Turbine
Fluid
ROYAL PURPLE SYNFILM GT 32 (500 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RP0027268	RP0040980	RP0027289
Sample Date	Client Info	15 Jul 2024	09 Apr 2024	27 Jan 2024
Machine Age	hrs Client Info	0	0	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >15	0	0	0
Chromium	ppm ASTM D5185m >4	0	0	0
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	<1
Aluminum	ppm ASTM D5185m >10	0	0	0
Lead	ppm ASTM D5185m	0	0	0
Copper	ppm ASTM D5185m >5	8	25	23
Tin	ppm ASTM D5185m >5	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	0
Barium	ppm ASTM D5185m	0	0	<1
Molybdenum	ppm ASTM D5185m	0	0	0
Manganese	ppm ASTM D5185m	0	0	<1
Magnesium	ppm ASTM D5185m	48	0	0
Calcium	ppm ASTM D5185m	0	0	1
Phosphorus	ppm ASTM D5185m	0	16	0
Zinc	ppm ASTM D5185m	0	0	0

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	1	2	2
Sodium	ppm ASTM D5185m	1	0	<1
Potassium	ppm ASTM D5185m >20	0	0	0
Water	% ASTM D6304 >0.03	0.017	0.003	0.004
ppm Water	ppm ASTM D6304 >300	179	39	44






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	2313	552	149
Particles >6µm	ASTM D7647 >1300	201	99	59
Particles >14µm	ASTM D7647 >160	19	15	11
Particles >21µm	ASTM D7647 >40	5	4	4
Particles >38µm	ASTM D7647 >10	0	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/14	18/15/11	16/14/11	14/13/11

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.39	0.39	0.37


OIL ANALYSIS REPORT

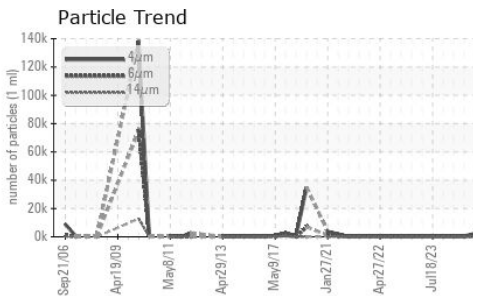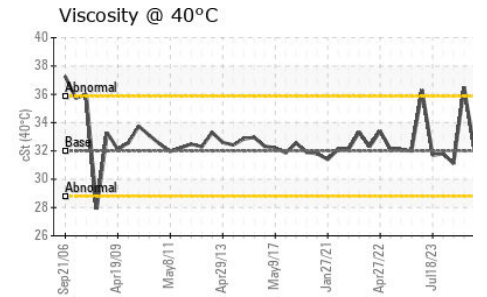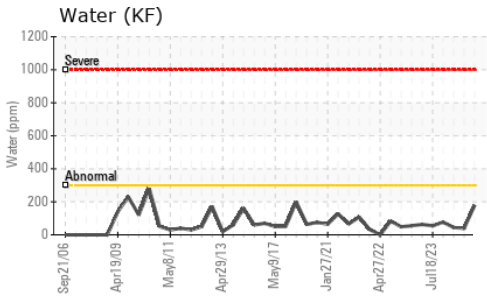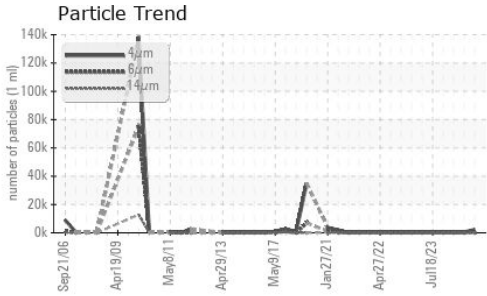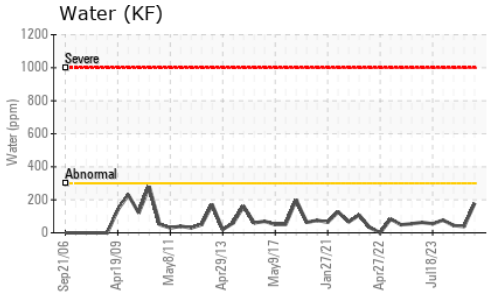






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	32.0	36.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

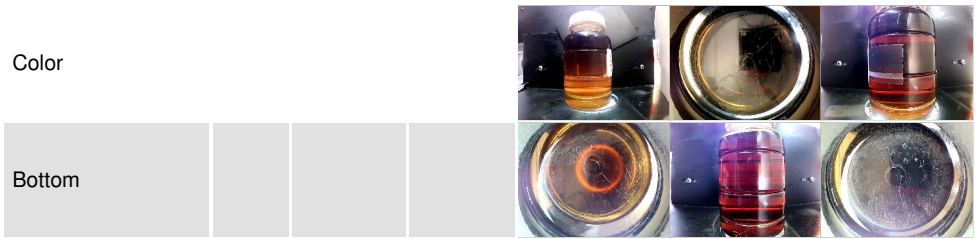

GRAPHS

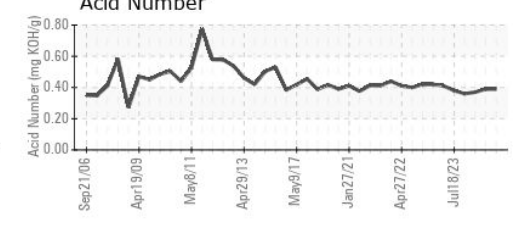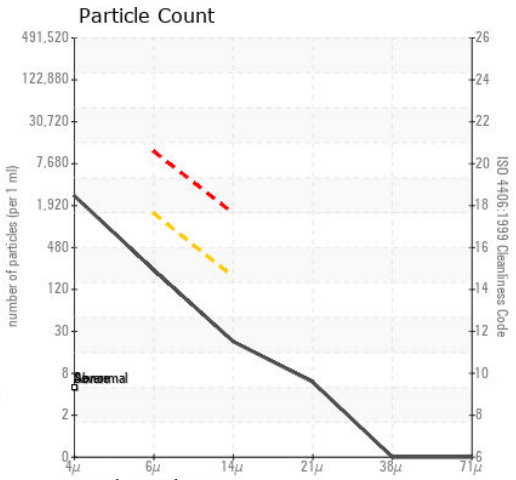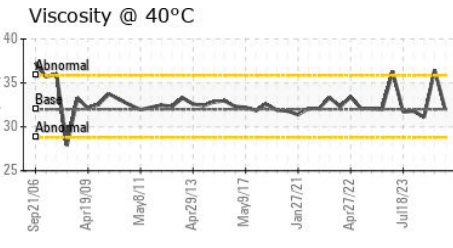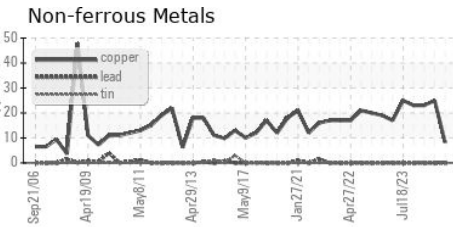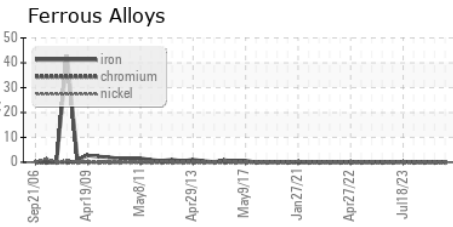

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0027268 **Received** : 16 Jul 2024
Lab Number : **06237770** **Tested** : 17 Jul 2024
Unique Number : 11126604 **Diagnosed** : 18 Jul 2024 - Don Baldrige
Test Package : IND 2 (Additional Tests: PrtCount)

ENTERPRISE PRODUCTS
P.O. BOX 573
MONT BELVIEU, TX
US 77580
Contact: TOMMY EDWARDS
tedwards@eproduct.com
T: (281)217-1411
F: (281)385-4327

To discuss this sample report, contact Customer Service at 1-800-237-1369.
* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)