




# OIL ANALYSIS REPORT

Sample Rating Trend

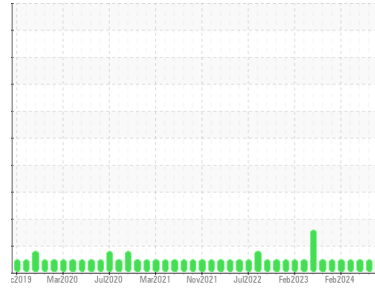

**NORMAL**



Machine Id  
**AERO HYD RECYCLED**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 24 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

A decrease in the viscosity is noted. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>USP239106</b>	USP0012004	USP239100
Sample Date	Client Info			<b>15 Jul 2024</b>	02 Jul 2024	28 May 2024
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>29</b>	27	24
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	3	3
Lead	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>20	<b>1</b>	3	2
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Calcium	ppm	ASTM D5185m		<b>33</b>	64	64
Phosphorus	ppm	ASTM D5185m		<b>425</b>	360	367
Zinc	ppm	ASTM D5185m		<b>232</b>	448	414
Sulfur	ppm	ASTM D5185m		<b>1829</b>	1885	2275






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>6</b>	5	4
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	2
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.005	0.004
ppm Water	ppm	ASTM D6304	>500	<b>68</b>	59	42

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>346</b>	282	351
Particles >6µm		ASTM D7647	>1300	<b>107</b>	80	43
Particles >14µm		ASTM D7647	>160	<b>19</b>	6	5
Particles >21µm		ASTM D7647	>40	<b>5</b>	2	2
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/14/11</b>	15/13/10	16/13/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.25</b>	0.38	0.40




# OIL ANALYSIS REPORT

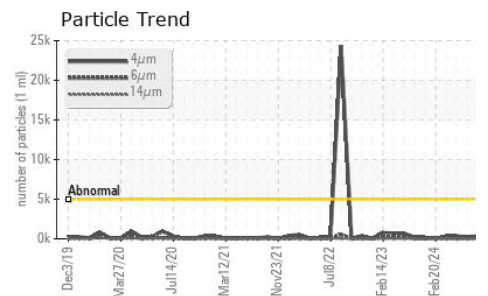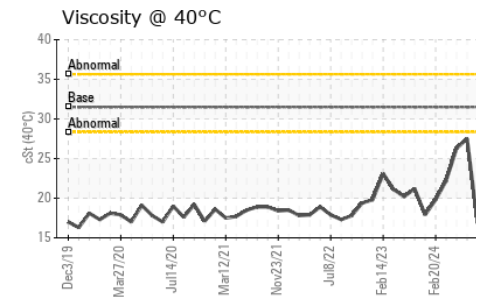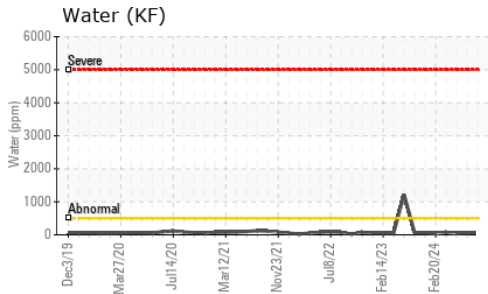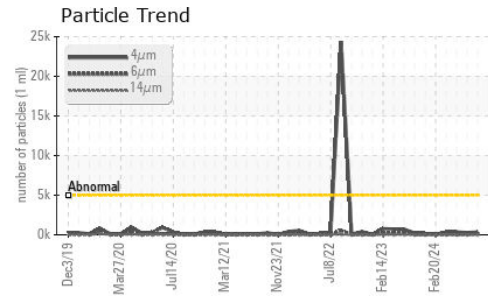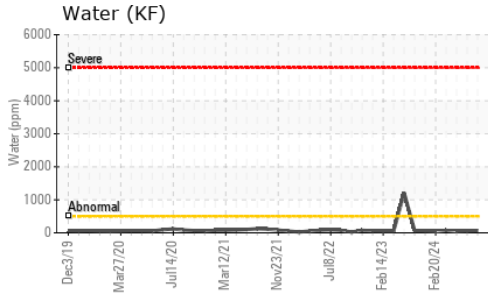






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.5	16.85	27.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

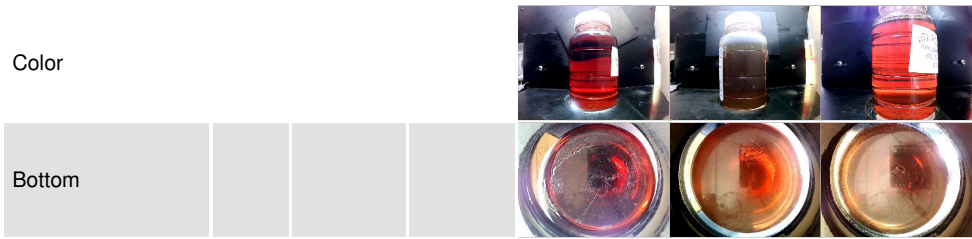

## GRAPHS

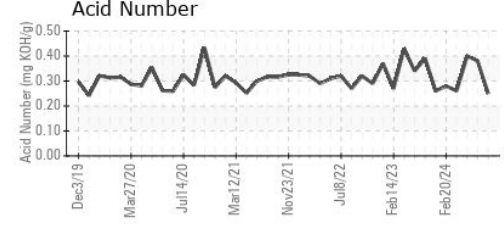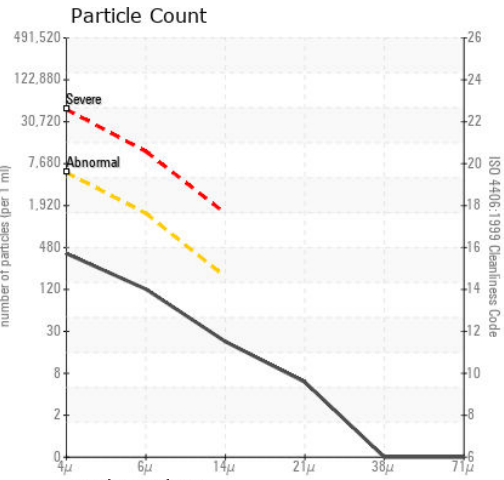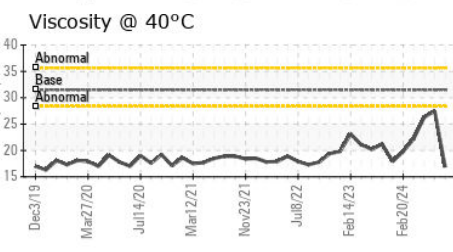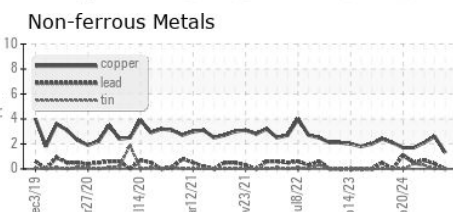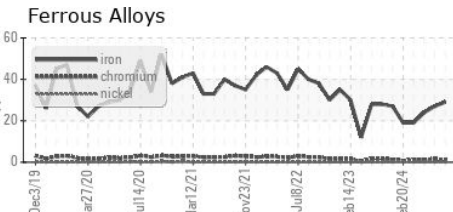

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP239106 **Received** : 16 Jul 2024  
**Lab Number** : 06237807 **Tested** : 19 Jul 2024  
**Unique Number** : 11126641 **Diagnosed** : 19 Jul 2024 - Doug Bogart  
**Test Package** : IND 2

**DOT FOODS**  
 MT STERLING, IL  
 US  
 Contact: J MILLER  
 jmiller2@dotfoods.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)