




# OIL ANALYSIS REPORT

Sample Rating Trend

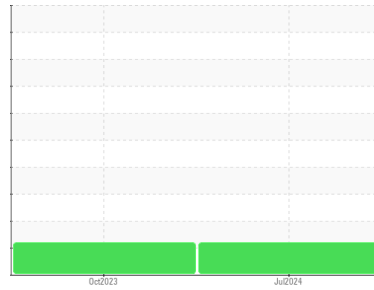

ISO



Machine Id

## EX VAC MILL (NORTH PLANT)

Component

Agitator Gearbox

Fluid

JAX SYNGEAR INDUSTRIAL GEAR ISO 320 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>USP0012365</b>	USP0002864	---
Sample Date	Client Info		<b>15 Jul 2024</b>	29 Oct 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ATTENTION</b>	ABNORMAL	---

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>150	<b>10</b>	8	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	1	---
Lead	ppm	ASTM D5185m	>100	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	---

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>3</b>	1	---
Phosphorus	ppm	ASTM D5185m		<b>602</b>	565	---
Zinc	ppm	ASTM D5185m		<b>&lt;1</b>	6	---
Sulfur	ppm	ASTM D5185m		<b>4336</b>	3679	---

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>50	<b>4</b>	4	---
Sodium	ppm	ASTM D5185m		<b>2</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Water	%	ASTM D6304	>0.1	<b>0.007</b>	0.008	---
ppm Water	ppm	ASTM D6304	>1000	<b>71</b>	83.4	---

### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	<b>32759</b>	48786	---
Particles >6µm	ASTM D7647	>5000	<b>5237</b>	6891	---
Particles >14µm	ASTM D7647	>640	<b>68</b>	131	---
Particles >21µm	ASTM D7647	>160	<b>9</b>	24	---
Particles >38µm	ASTM D7647	>40	<b>0</b>	1	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	<b>22/20/13</b>	23/20/14	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.60</b>	0.61	---




# OIL ANALYSIS REPORT

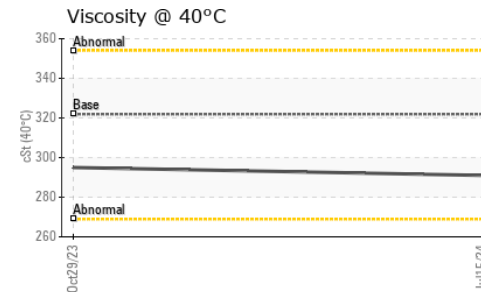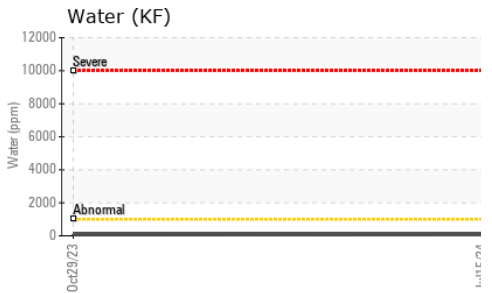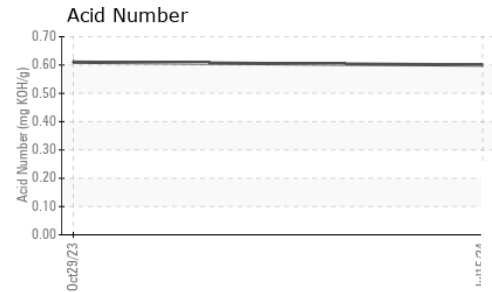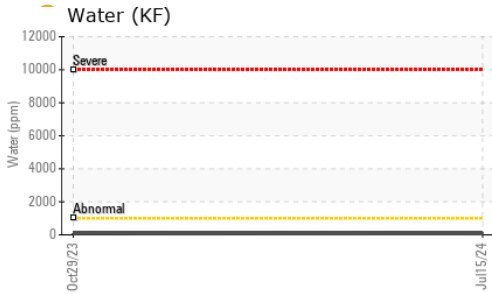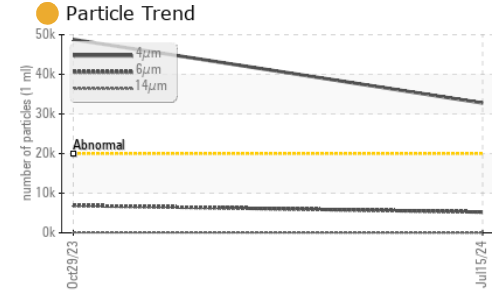





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	321.9	295	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

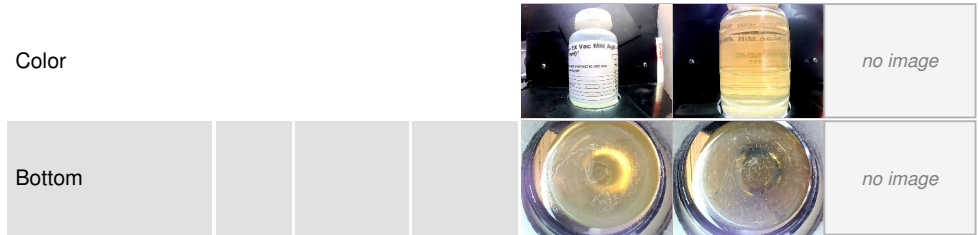

## GRAPHS

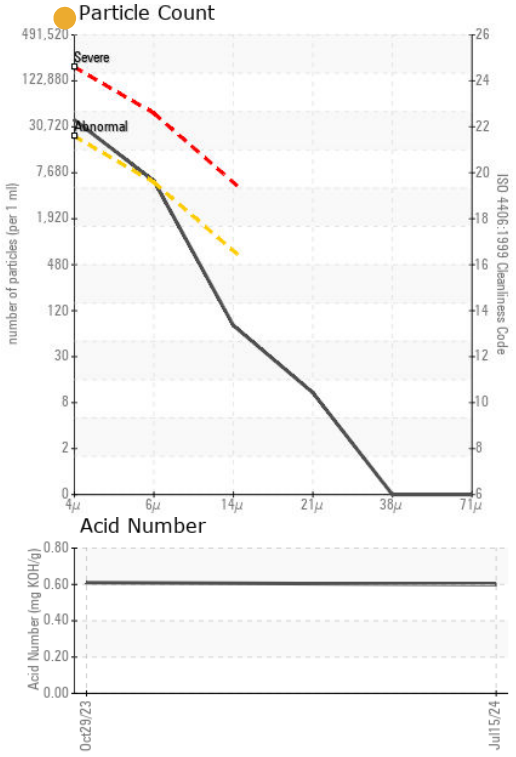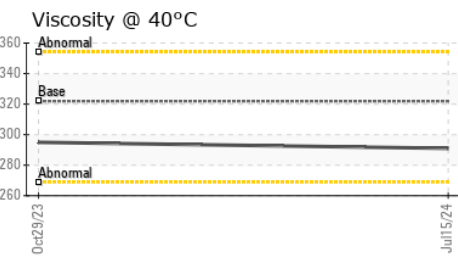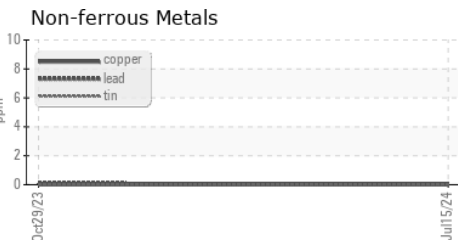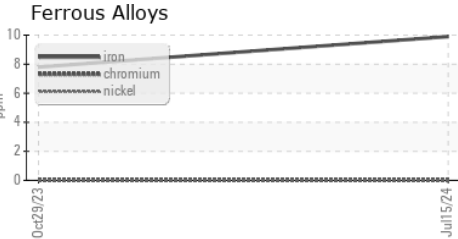

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0012365  
**Lab Number** : 06237830  
**Unique Number** : 11126664  
**Test Package** : IND 2

**Received** : 16 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Doug Bogart

**TYSON HILLSHIRE - SAINT JOSEPH**  
 5807 MITCHELL AVE  
 SAINT JOSEPH, MO  
 US 64507  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: