




OIL ANALYSIS REPORT

Sample Rating Trend

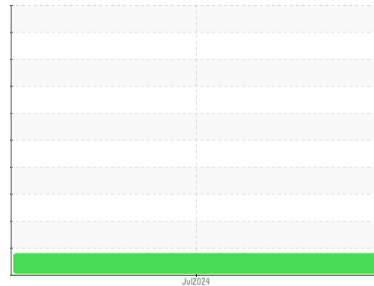

WEAR



Machine Id
TAKEUCHI TL10V2 410005400
 Component
Right Final Drive
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Gear wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0002674	---	---
Sample Date	Client Info		12 Jul 2024	---	---
Machine Age	hrs	Client Info	889	---	---
Oil Age	hrs	Client Info	889	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---



WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	▲ 875	---	---
Chromium	ppm	ASTM D5185m >10	8	---	---
Nickel	ppm	ASTM D5185m >10	1	---	---
Titanium	ppm	ASTM D5185m	2	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >25	13	---	---
Lead	ppm	ASTM D5185m >25	0	---	---
Copper	ppm	ASTM D5185m >50	2	---	---
Tin	ppm	ASTM D5185m >10	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	502	---	---
Barium	ppm	ASTM D5185m 200	0	---	---
Molybdenum	ppm	ASTM D5185m 12	1	---	---
Manganese	ppm	ASTM D5185m	9	---	---
Magnesium	ppm	ASTM D5185m 12	2	---	---
Calcium	ppm	ASTM D5185m 150	73	---	---
Phosphorus	ppm	ASTM D5185m 1650	1429	---	---
Zinc	ppm	ASTM D5185m 125	58	---	---
Sulfur	ppm	ASTM D5185m 22500	19801	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	70	---	---
Sodium	ppm	ASTM D5185m	1	---	---
Potassium	ppm	ASTM D5185m >20	5	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	NONE	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT

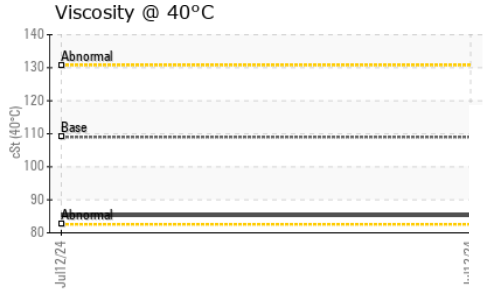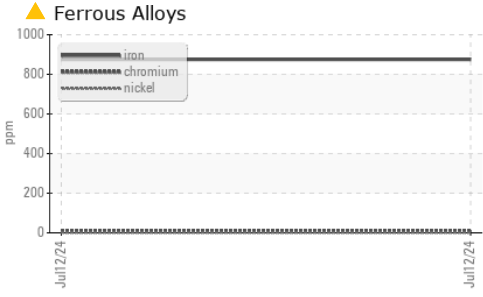




FLUID PROPERTIES

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	85.3	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

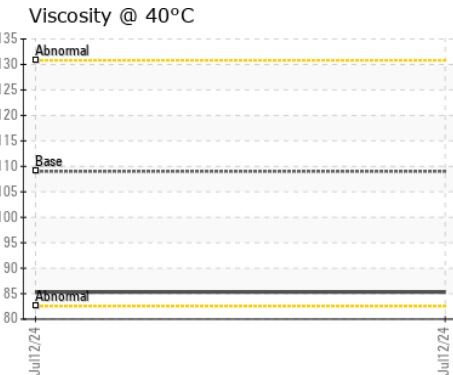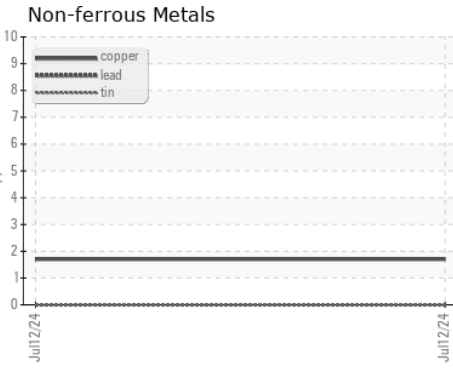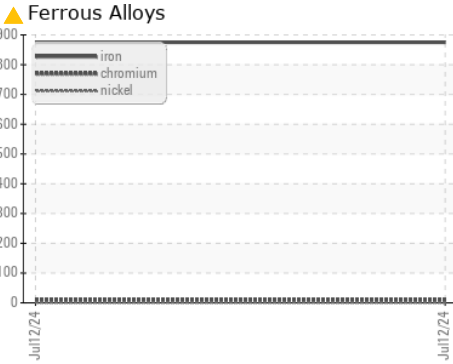

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002674
Lab Number : 06238224
Unique Number : 11127058
Test Package : CONST
Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

MCCLUNG-LOGAN EQUIPMENT CO - SALEM
 2025 COOK DRIVE
 SALEM, VA
 US 24153
 Contact: SCOTT CARR
 scarr@mcclung-logan.com
 T: (540)418-5218
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)