




OIL ANALYSIS REPORT

Sample Rating Trend

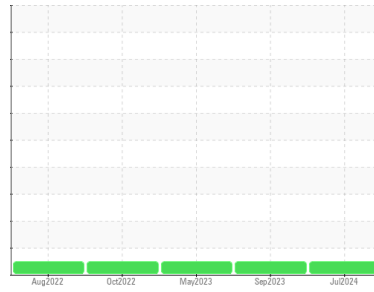

NORMAL



Machine Id
D-232
 Component
Left Final Drive
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | | WC0900284 | WC0828531 | WC0780348 |
| Sample Date | Client Info | | | 11 Jul 2024 | 21 Sep 2023 | 22 May 2023 |
| Machine Age | hrs | Client Info | | 3094 | 2279 | 1696 |
| Oil Age | hrs | Client Info | | 0 | 1112 | 584 |
| Oil Changed | Client Info | | | N/A | Changed | Not Chngd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | | >0.2 | NEG | NEG | NEG |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >500 | 25 | 37 | 22 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 3 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >25 | 0 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >50 | 0 | 0 | <1 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | <1 |


| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 107 | 89 | 100 |
| Barium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 1 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 18 | 23 | 19 |
| Calcium | ppm | ASTM D5185m | | 3239 | 3011 | 3382 |
| Phosphorus | ppm | ASTM D5185m | | 1057 | 988 | 1075 |
| Zinc | ppm | ASTM D5185m | | 1246 | 1238 | 1357 |
| Sulfur | ppm | ASTM D5185m | | 3422 | 3045 | 3677 |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 20 | 15 | 14 |
| Sodium | ppm | ASTM D5185m | | 6 | 5 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 0 | 3 |

| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |



OIL ANALYSIS REPORT



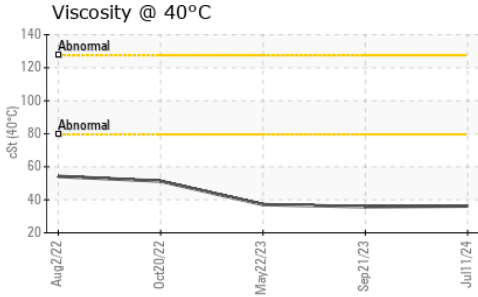


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 36.2 | 35.8 | 37.1 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | |
|--------|--|--|----------|----------|----------|
| Color | | | no image | no image | no image |
| Bottom | | | no image | no image | no image |

GRAPHS

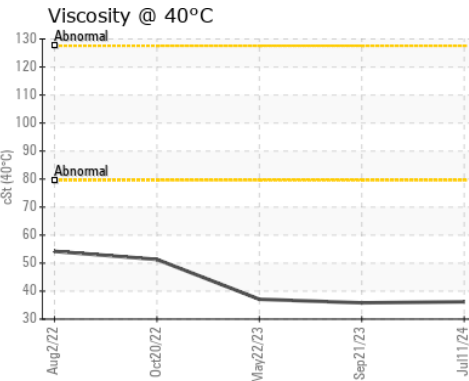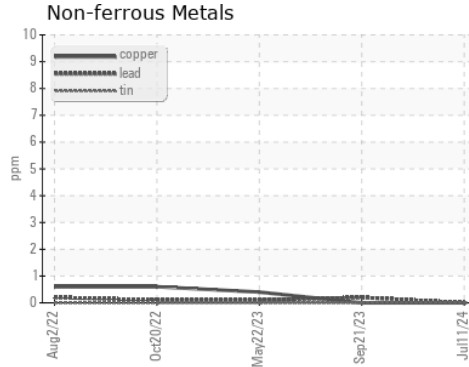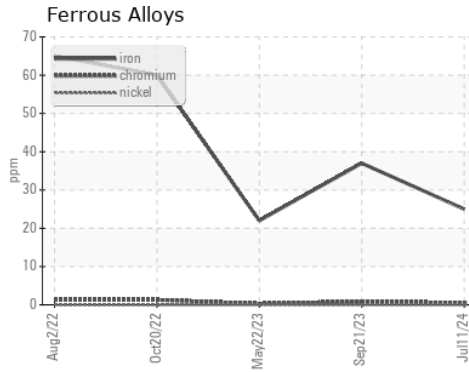

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900284 **Received** : 16 Jul 2024
Lab Number : 06238257 **Tested** : 17 Jul 2024
Unique Number : 11127091 **Diagnosed** : 17 Jul 2024 - Wes Davis
Test Package : CONST

DUKE LAZZARA
 4201 FAYETTEVILLE RD
 RALEIGH, NC
 US 27603
 Contact: BRANDON BYRUM
 b.byrum@dukelazzara.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: