

## **OIL ANALYSIS REPORT**

Sample Rating Trend

### NORMAL

#### Area **PSA** Machine Id [PSA] PSA LUBE TOTE 20

Reciprocating Compressor - Packing/Cylinders

Fluid TURBINE OIL ISO 100 (--- GAL)

#### DIAGNOSIS


Recommendation

This is a baseline read-out on the submitted sample.


SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		RP0042863		
Sample Date		Client Info		12 Jul 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>50	0		
Tin	ppm	ASTM D5185m	>15	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	5	3		
Calcium	ppm	ASTM D5185m	10	11		
Phosphorus	ppm	ASTM D5185m	275	33		
Zinc	ppm	ASTM D5185m	7	11		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.1	0.001		
ppm Water	ppm	ASTM D6304	>1000	3		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2575		
Particles >6µm		ASTM D7647	>2500	634		
Particles >14µm		ASTM D7647	>320	56		
Particles >21µm		ASTM D7647	>80	13		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/16/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.13	0.177		



# **OIL ANALYSIS REPORT**





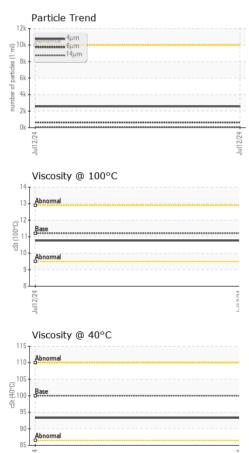

Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar   scalar   scalar   scalar   scalar   scalar   scalar   scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NONE NORML NORML >0.1	NONE NONE NONE NONE NONE NORML NORML NEG NEG		
Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar scalar scalar scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML NORML	NONE NONE NONE NORML NORML NEG	   	
Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NORML NORML	NONE NONE NORML NORML NEG	  	
Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water Free Water Visc @ 40°C	scalar scalar scalar scalar scalar scalar Scalar	*Visual *Visual *Visual *Visual *Visual *Visual	NONE NORML NORML	NONE NONE NORML NORML NEG		
Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar ES	*Visual *Visual *Visual *Visual *Visual	NONE NORML NORML	NONE NONE NORML NORML NEG	 	
Appearance Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar scalar scalar scalar Scalar	*Visual *Visual *Visual *Visual	NORML NORML	NONE NORML NORML NEG		
Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar scalar scalar ES	*Visual *Visual *Visual	NORML NORML	NORML NEG		
Odor Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar scalar ES	*Visual *Visual		NEG		
Emulsified Water Free Water FLUID PROPERTIE Visc @ 40°C	scalar scalar ES	*Visual *Visual				
Free Water FLUID PROPERTIE Visc @ 40°C	scalar ES	*Visual				
FLUID PROPERTIE Visc @ 40°C	ES					
Visc @ 40°C		meinoa .	limit/base	current	history1	history
		ASTM D445		93.3		
			11.2	93.3 10.76		
		ASTM D445				
,		ASTM D2270	97	98		
SAMPLE IMAGES		method	limit/base	current	history1	history
Color					no image	no imag
Bottom					no image	no image
Ferrous Alloys					2	
8 6 2 2			491,520 122,880 30,720	) Severe Abnormal	nt	
Non-ferrous Metals			122,880	D Severe Abnormal	nt	
Non-ferrous Metals			122.880 30.720 4727 [E] F 7.600 4727 [E] Ta 1.920 90 pt 480 10 a 1.920 120 120 120 120 120 120 120 120 120 1	D D D D D D D D D D D D D D	nt	
Non-ferrous Metals			122,880 30,720 122,880 122,880 122,180 120,180	Abnormal Abnormal Abnormal Acid Number	14μ 21μ	38µ 7
Non-ferrous Metals			122,880 30,720 122,880 122,880 122,180 120,180	Abnormal Abnormal Abnormal Acid Number	14μ 21μ	
Non-ferrous Metals			122,880 30,720 122,880 122,880 122,180 120,180	Abnormal Abnormal Abnormal Acid Number	14μ 21μ	
Non-ferrous Metals			122,880 30,720 4	Abnormal Abnormal Abnormal Acid Number	14μ 21μ	

To discuss this sample report \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

ПX

Submitted By: CODY COMPTON

Page 2 of 2

F: