OIL ANALYSIS REPORT

Sample Rating Trend

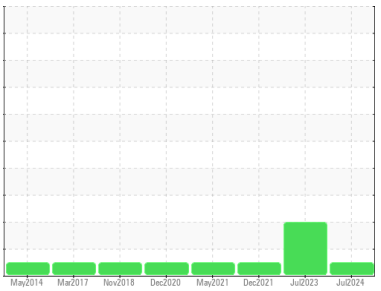

NORMAL

Machine Id
SL1 DRIVE 1
Component
Gearbox
Fluid
MOBIL MOBILUBE HD 80W90 (12 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the component.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**RP0037241**	RP0018343	RP0018320
Sample Date		Client Info		**03 Jul 2024**	09 Jul 2023	10 Dec 2021
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	Not Changd
Sample Status				**NORMAL**	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**4**	3	3
Chromium	ppm	ASTM D5185m	>15	**0**	0	0
Nickel	ppm	ASTM D5185m	>15	**<1**	<1	0
Titanium	ppm	ASTM D5185m		**0**	0	0
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>25	**2**	<1	0
Lead	ppm	ASTM D5185m	>100	**0**	<1	<1
Copper	ppm	ASTM D5185m	>200	**7**	<1	<1
Tin	ppm	ASTM D5185m	>25	**0**	0	0
Antimony	ppm	ASTM D5185m	>5	**---**	---	193
Vanadium	ppm	ASTM D5185m		**0**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**3**	1	4
Barium	ppm	ASTM D5185m		**0**	1	0
Molybdenum	ppm	ASTM D5185m		**<1**	<1	<1
Manganese	ppm	ASTM D5185m		**2**	0	<1
Magnesium	ppm	ASTM D5185m		**3**	1	<1
Calcium	ppm	ASTM D5185m		**13**	4	5
Phosphorus	ppm	ASTM D5185m		**301**	308	293
Zinc	ppm	ASTM D5185m		**17**	16	4

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**12**	11	8
Sodium	ppm	ASTM D5185m		**4**	0	<1
Potassium	ppm	ASTM D5185m	>20	**2**	0	0
Water	%	ASTM D6304	>0.2	**0.004**	0.010	0.002
ppm Water	ppm	ASTM D6304	>2000	**47**	100.6	20.7

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	**---**	▲ 102820	---
Particles >6µm		ASTM D7647	>5000	**---**	▲ 28861	---
Particles >14µm		ASTM D7647	>640	**---**	▲ 1341	---
Particles >21µm		ASTM D7647	>160	**---**	▲ 290	---
Particles >38µm		ASTM D7647	>40	**---**	11	---
Particles >71µm		ASTM D7647	>10	**---**	1	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	**---**	▲ 24/22/18	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		**0.71**	0.84	0.763

OIL ANALYSIS REPORT

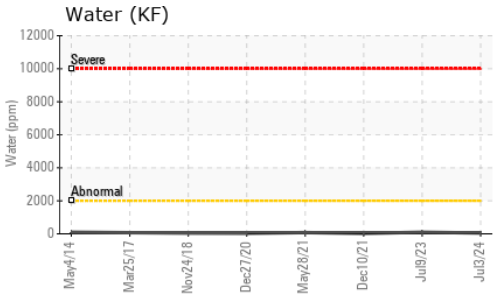

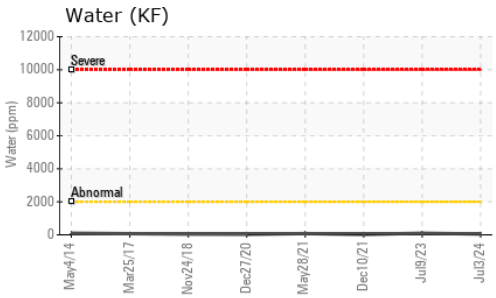

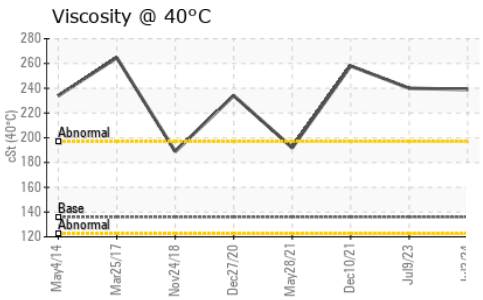

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	136	**239**	240	258

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					*no image*
Bottom					*no image*

GRAPHS

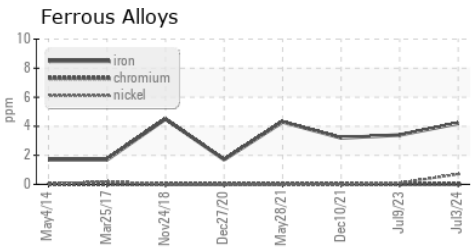

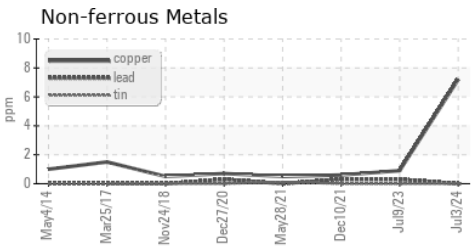

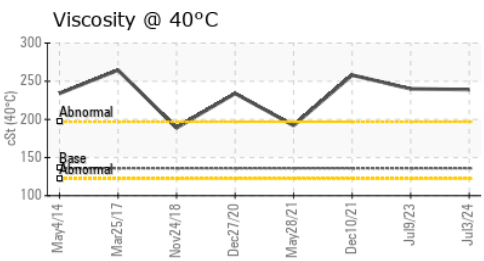

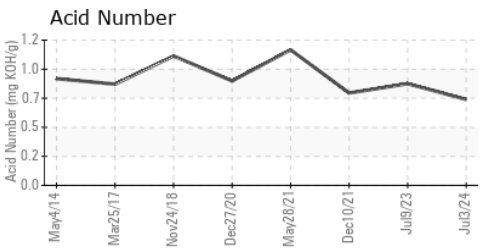

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0037241
Lab Number : 06238496
Unique Number : 11127330
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 16 Jul 2024
Tested : 18 Jul 2024
Diagnosed : 18 Jul 2024 - Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JOHNSON CONTROLS
1890 MINES RD
PULASKI, TN
US 38478
Contact: JEREMY ROSE
jeremy.b.rose@adient.com
T:
F: