




OIL ANALYSIS REPORT

Sample Rating Trend

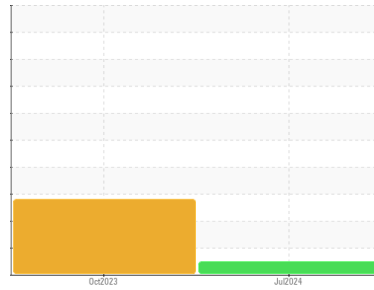

NORMAL



Machine Id
WESTERN STAR Transport
 Component
Diesel Engine
 Fluid
SHELL Rotella T5 15W-40 (10 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0004130	PE0001938	---
Sample Date	Client Info			03 Jul 2024	12 Oct 2023	---
Machine Age	hrs	Client Info		1341	0	---
Oil Age	hrs	Client Info		562	16714	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	0.6	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	14	55	---
Chromium	ppm	ASTM D5185m	>5	<1	2	---
Nickel	ppm	ASTM D5185m	>4	<1	1	---
Titanium	ppm	ASTM D5185m	>2	<1	<1	---
Silver	ppm	ASTM D5185m	>2	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	6	▲ 44	---
Lead	ppm	ASTM D5185m	>150	4	4	---
Copper	ppm	ASTM D5185m	>90	2	30	---
Tin	ppm	ASTM D5185m	>5	2	4	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		<1	<1	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		7	37	---
Barium	ppm	ASTM D5185m		0	4	---
Molybdenum	ppm	ASTM D5185m		59	47	---
Manganese	ppm	ASTM D5185m		<1	6	---
Magnesium	ppm	ASTM D5185m		858	539	---
Calcium	ppm	ASTM D5185m		1119	1533	---
Phosphorus	ppm	ASTM D5185m		981	788	---
Zinc	ppm	ASTM D5185m		1180	922	---
Sulfur	ppm	ASTM D5185m		2679	2598	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	7	▲ 46	---
Sodium	ppm	ASTM D5185m		2	6	---
Potassium	ppm	ASTM D5185m	>20	11	139	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	0.5	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	8.8	9.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	23.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	23.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	7.9	8.0	---





OIL ANALYSIS REPORT

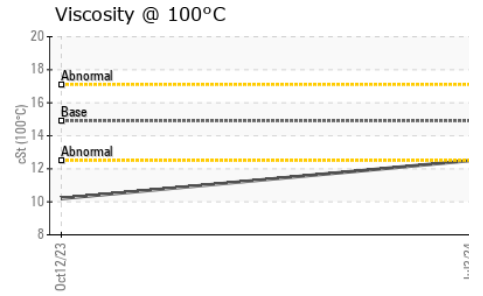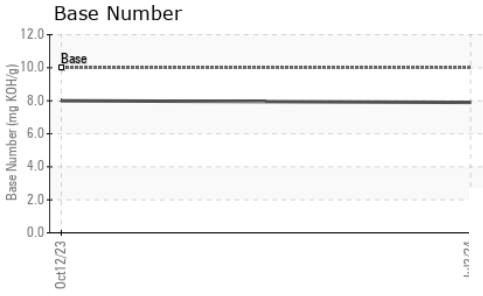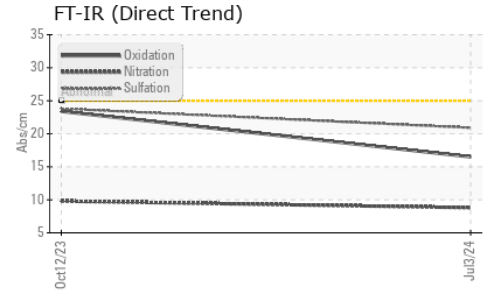

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	12.5	10.2

GRAPHS

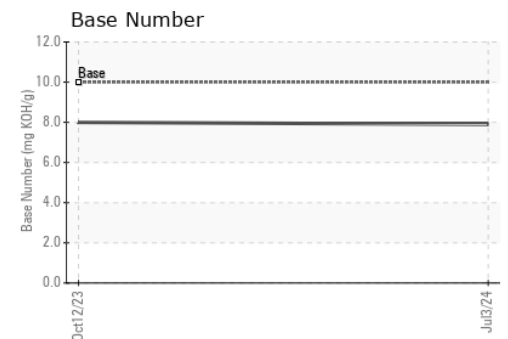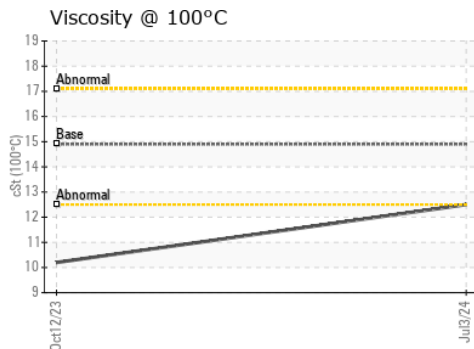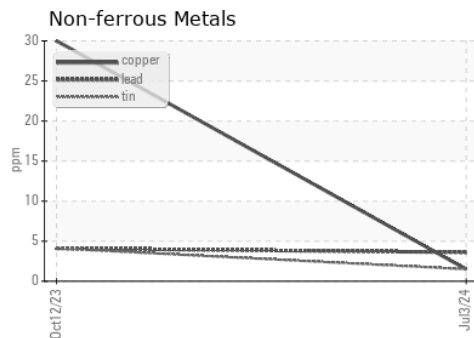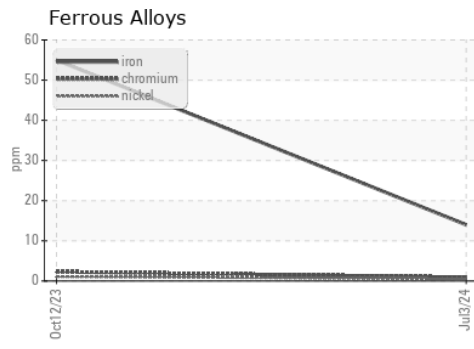

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0004130 **Received** : 16 Jul 2024
Lab Number : 06238675 **Tested** : 17 Jul 2024
Unique Number : 11127509 **Diagnosed** : 18 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

PetroCard - Aberdeen
 110 Commerce St
 Aberdeen, WA
 US 98520
 Contact: Sean McNealley
 smcnealley@petrocard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)