




OIL ANALYSIS REPORT

Sample Rating Trend

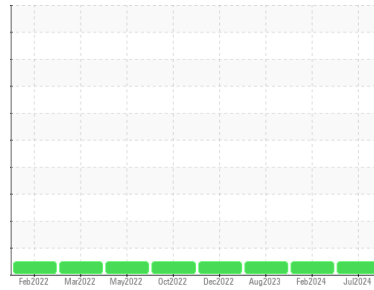

NORMAL



Machine Id
T1501
 Component
Diesel Engine
 Fluid

MOBIL DELVAC 1300 SUPER 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0944470	WC0859290	PCA0085455
Sample Date	Client Info			05 Jul 2024	21 Feb 2024	29 Aug 2023
Machine Age	mls	Client Info		622845	605025	585524
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	40	41	29
Chromium	ppm	ASTM D5185m	>5	2	1	1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		3	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	14	▲ 25	6
Lead	ppm	ASTM D5185m	>30	5	5	3
Copper	ppm	ASTM D5185m	>150	2	2	<1
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	147	● 208	136
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	143	● 166	142
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	825	● 848	791
Calcium	ppm	ASTM D5185m		1892	● 1996	1826
Phosphorus	ppm	ASTM D5185m		939	915	796
Zinc	ppm	ASTM D5185m		1130	1093	986
Sulfur	ppm	ASTM D5185m		2949	2878	3133

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	15	13	9
Sodium	ppm	ASTM D5185m		3	3	2
Potassium	ppm	ASTM D5185m	>20	3	2	2


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.8	0.8	0.8
Nitration	Abs/cm	*ASTM D7624	>20	14.2	13.3	12.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.2	▲ 30.8	28.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.3	▲ 28.7	25.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.5	7.3	7.0




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

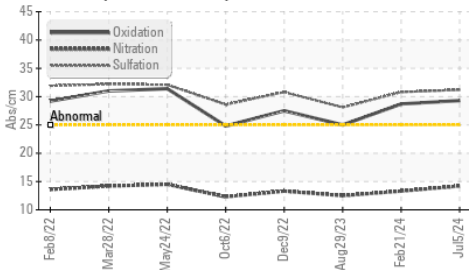

Base Number

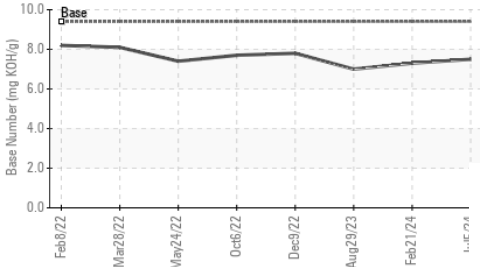

Viscosity @ 100°C

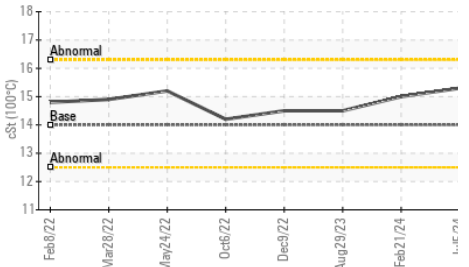


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	15.3	15.0	14.5

GRAPHS


Ferrous Alloys

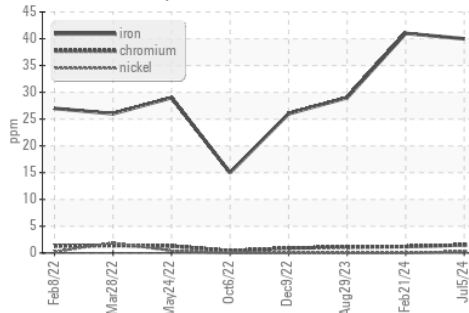


Non-ferrous Metals

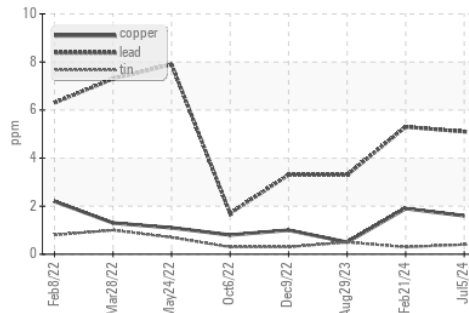

Viscosity @ 100°C

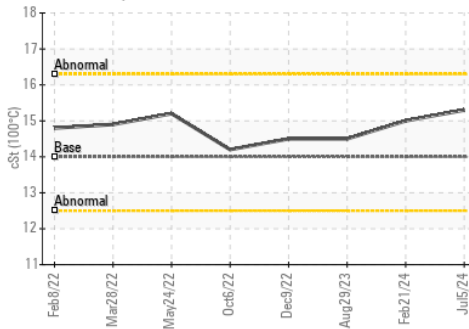

Base Number

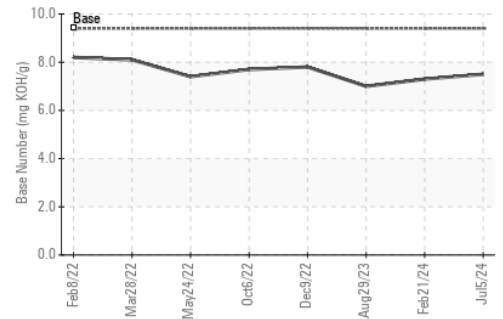

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0944470

Lab Number : 06238695

Unique Number : 11127529

Test Package : FLEET

Received : 16 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 18 Jul 2024 - Sean Felton

Ergon Trucking Inc. - MAG601

11337 State Route 800

Magnolia, OH

US 44643

Contact: Eddy Smith

eddy.smith@ergon.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)