




# FUEL REPORT

Sample Rating Trend

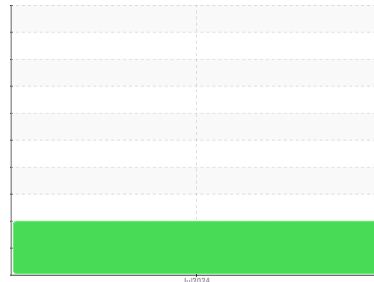

ISO



Machine Id  
**KIOTI CS2520 XX8800502**

Component  
**Diesel Fuel**

Fluid  
**No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you filter this fluid before use. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

### Corrosion

All metal levels are normal indicating no corrosion in the cooling system.

### Contaminants

There is a moderate amount of particulates present in the fuel. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible.

### Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>KT0001483</b>   | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>16 Jul 2024</b> | ---      | ---      |
| Machine Age        | hrs         | Client Info |            | <b>60</b>          | ---      | ---      |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | ---      | ---      |

| PHYSICAL PROPERTIES        |        | method           | limit/base | current      | history1 | history2 |
|----------------------------|--------|------------------|------------|--------------|----------|----------|
| Specific Gravity           |        | *ASTM D1298      |            | <b>0.840</b> | ---      | ---      |
| Fuel Color                 | text   | *Visual Screen   | Yllow      | <b>Red</b>   | ---      | ---      |
| ASTM Color                 | scalar | *ASTM D1500      |            | <b>L4.5</b>  | ---      | ---      |
| Visc @ 40°C                | cSt    | ASTM D445        | 3.0        | <b>2.43</b>  | ---      | ---      |
| Pensky-Martens Flash Point | °C     | *PMCC Calculated | 52         | <b>60.5</b>  | ---      | ---      |

| SULFUR CONTENT |     | method      | limit/base | current   | history1 | history2 |
|----------------|-----|-------------|------------|-----------|----------|----------|
| Sulfur         | ppm | ASTM D5185m | 10         | <b>95</b> | ---      | ---      |
| Sulfur (UVF)   | ppm | ASTM D5453  |            | <b>9</b>  | ---      | ---      |






| DISTILLATION           |    | method   | limit/base | current    | history1 | history2 |
|------------------------|----|----------|------------|------------|----------|----------|
| Initial Boiling Point  | °C | ASTM D86 | 165        | <b>171</b> | ---      | ---      |
| 5% Distillation Point  | °C | ASTM D86 |            | <b>194</b> | ---      | ---      |
| 10% Distill Point      | °C | ASTM D86 | 201        | <b>204</b> | ---      | ---      |
| 15% Distillation Point | °C | ASTM D86 |            | <b>212</b> | ---      | ---      |
| 20% Distill Point      | °C | ASTM D86 | 216        | <b>220</b> | ---      | ---      |
| 30% Distill Point      | °C | ASTM D86 | 230        | <b>234</b> | ---      | ---      |
| 40% Distill Point      | °C | ASTM D86 | 243        | <b>248</b> | ---      | ---      |
| 50% Distill Point      | °C | ASTM D86 | 255        | <b>261</b> | ---      | ---      |
| 60% Distill Point      | °C | ASTM D86 | 267        | <b>275</b> | ---      | ---      |
| 70% Distill Point      | °C | ASTM D86 | 280        | <b>289</b> | ---      | ---      |
| 80% Distill Point      | °C | ASTM D86 | 295        | <b>304</b> | ---      | ---      |
| 85% Distillation Point | °C | ASTM D86 |            | <b>315</b> | ---      | ---      |
| 90% Distill Point      | °C | ASTM D86 | 310        | <b>326</b> | ---      | ---      |
| 95% Distillation Point | °C | ASTM D86 |            | <b>344</b> | ---      | ---      |
| Final Boiling Point    | °C | ASTM D86 | 341        | <b>359</b> | ---      | ---      |

| IGNITION QUALITY |  | method     | limit/base | current   | history1 | history2 |
|------------------|--|------------|------------|-----------|----------|----------|
| API Gravity      |  | ASTM D7777 | 37.7       | <b>36</b> | ---      | ---      |
| Cetane Index     |  | ASTM D4737 | <40.0      | <b>48</b> | ---      | ---      |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | <1.0       | <b>&lt;1</b> | ---      | ---      |
| Sodium       | ppm | ASTM D5185m | <0.1       | <b>0</b>     | ---      | ---      |
| Potassium    | ppm | ASTM D5185m | <0.1       | <b>0</b>     | ---      | ---      |
| Water        | %   | ASTM D6304  | <0.05      | <b>0.003</b> | ---      | ---      |
| ppm Water    | ppm | ASTM D6304  | <500       | <b>30</b>    | ---      | ---      |
| % Gasoline   | %   | *In-House   | <0.50      | <b>0.0</b>   | ---      | ---      |
| % Biodiesel  | %   | *In-House   | <20.0      | <b>0.0</b>   | ---      | ---      |



# FUEL REPORT

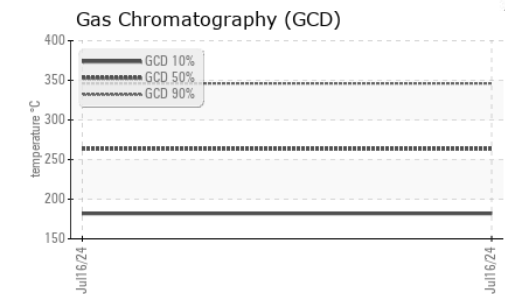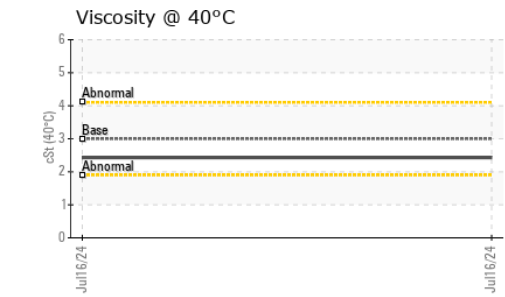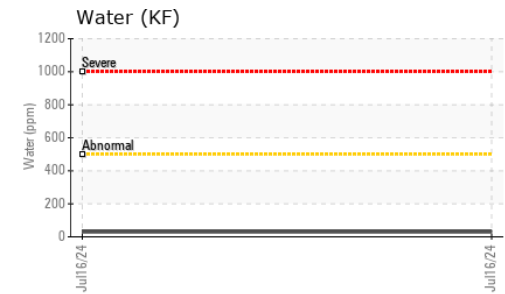
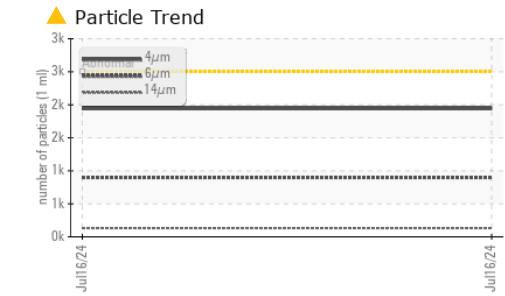
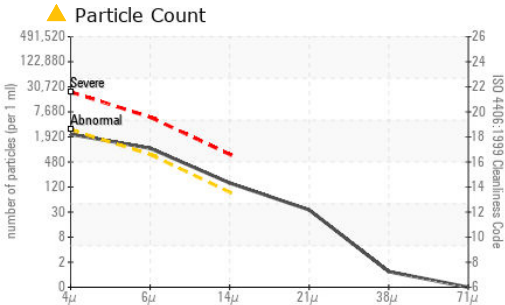


| FLUID CLEANLINESS | method       | limit/base | current    | history1 | history2 |
|-------------------|--------------|------------|------------|----------|----------|
| Particles >4µm    | ASTM D7647   | >2500      | ▲ 1942     | ---      | ---      |
| Particles >6µm    | ASTM D7647   | >640       | ▲ 899      | ---      | ---      |
| Particles >14µm   | ASTM D7647   | >80        | ▲ 132      | ---      | ---      |
| Particles >21µm   | ASTM D7647   | >20        | ▲ 30       | ---      | ---      |
| Particles >38µm   | ASTM D7647   | >4         | 1          | ---      | ---      |
| Particles >71µm   | ASTM D7647   | >3         | 0          | ---      | ---      |
| Oil Cleanliness   | ISO 4406 (c) | >18/16/13  | ▲ 18/17/14 | ---      | ---      |

| HEAVY METALS | method | limit/base       | current | history1 | history2 |
|--------------|--------|------------------|---------|----------|----------|
| Aluminum     | ppm    | ASTM D5185m <0.1 | 1       | ---      | ---      |
| Nickel       | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |
| Lead         | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |
| Vanadium     | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |
| Iron         | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |
| Calcium      | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |
| Magnesium    | ppm    | ASTM D5185m <0.1 | <1      | ---      | ---      |
| Phosphorus   | ppm    | ASTM D5185m <0.1 | 8       | ---      | ---      |
| Zinc         | ppm    | ASTM D5185m <0.1 | 0       | ---      | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color         |        |            |         | no image | no image |
| Bottom        |        |            |         | no image | no image |

## GRAPHS

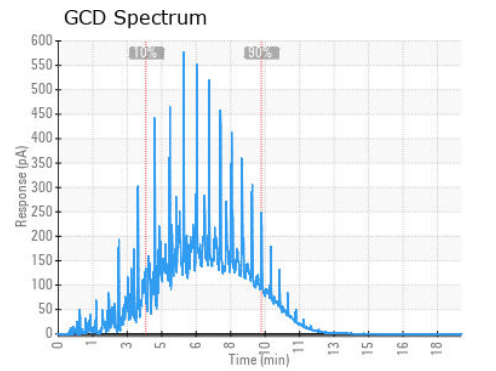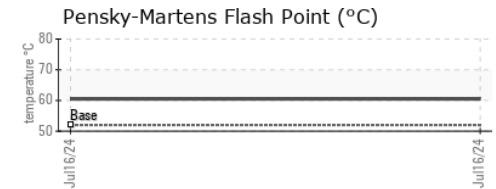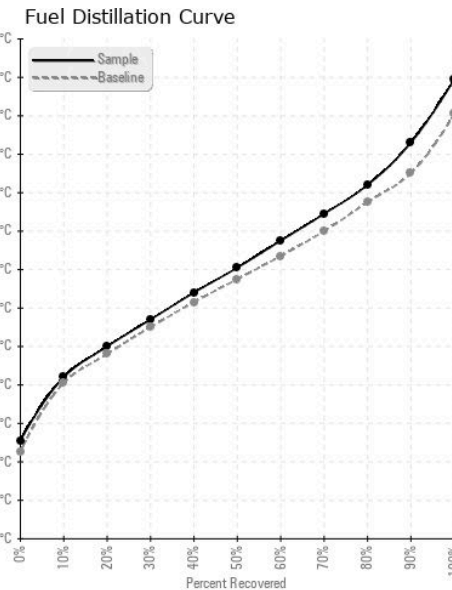

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : KT0001483

Lab Number : 06238748

Unique Number : 11127582

Test Package : DF-2 ( Additional Tests: Fuel, Screen )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 16 Jul 2024

Tested : 19 Jul 2024

Diagnosed : 19 Jul 2024 - Doug Bogart

BOONE TRACTOR

2756 E LEE HWY

MAX MEADOWS, VA

US 24360

Contact: H. JONES

hejones@boonetractor.com

T: (276)484-9290

F: