

OIL ANALYSIS REPORT

Area Drills 122002

1 Left Hydrostatic

CONOCO MEGAFLOW AW 32 (--- GAL)

Sample Rating Trend



Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2024	Jul2024		
CAMPLE INCOR	AATION		11 11 11		11.0	111
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KOH0000058	KOH0000013	
Sample Date		Client Info		11 Jul 2024	06 May 2024	
Machine Age	hrs	Client Info		582	0	
Oil Age	hrs	Client Info		582	3	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<1	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>50	0	0	
Lead	ppm	ASTM D5185m	>50	0	0	
Copper	ppm	ASTM D5185m	>200	1	3	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	-	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	1	
Magnesium	ppm	ASTM D5185m	0	1	1	
Calcium	ppm	ASTM D5185m	80	54	86	
Phosphorus	ppm	ASTM D5185m	365	344	353	
Zinc	ppm	ASTM D5185m	500	441	466	
Sulfur	ppm	ASTM D5185m	1000	1023	1081	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1	2	
Sodium	ppm	ASTM D5185m	/00	1	2	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2470	1711	
Particles >6µm		ASTM D7647		859	359	
Particles >14µm		ASTM D7647	>320	78	26	
Particles >21µm		ASTM D7647		18	7	
Particles >38µm		ASTM D7647	>20	1	1	
Particles >71µm		ASTM D7647		0	1	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/17/13	18/16/12	
FLUID DEGRADA	TION_	method				history2

KOMATSU

OIL ANALYSIS REPORT

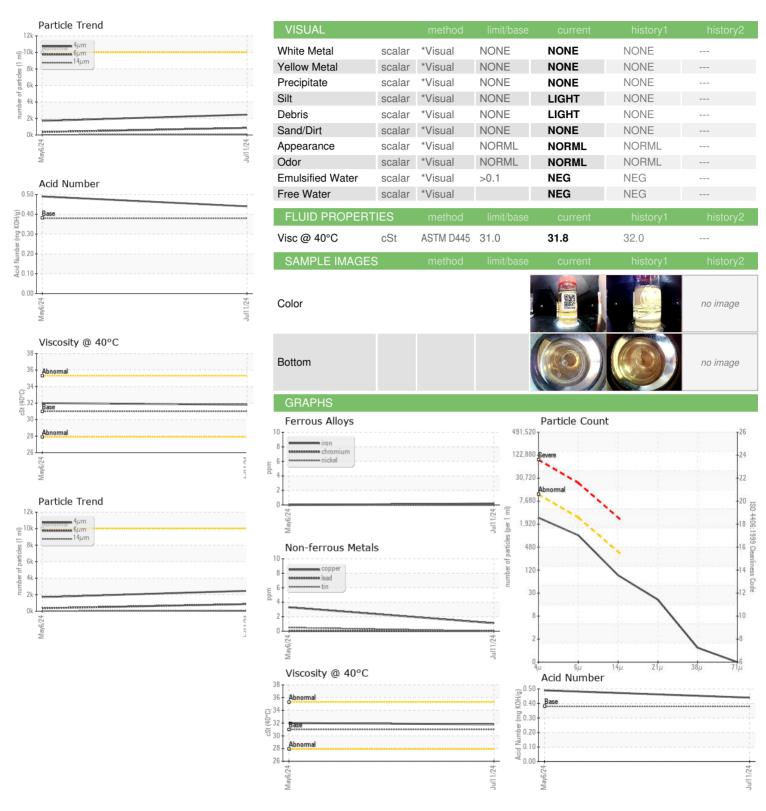





Certificate 12367

Laboratory Sample No.

Lab Number : 06239101

: KOH0000058 Unique Number : 11127935

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 17 Jul 2024 **Tested**

: 18 Jul 2024 Diagnosed : 18 Jul 2024 - Wes Davis Test Package : CONST (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KOMATSU HYDRAULICS

401 E GREENFIELD AVENUE MILWAUKEE, WI US 53204-2941

Contact: JOHN GATES john.gates@global.komatsu

T: (414)670-5932