

Area

Drills

Machine Id


122002

Component

2 Left Hydrostatic

Fluid

CONOCO MEGAFLOW AW 32 (--- GAL)

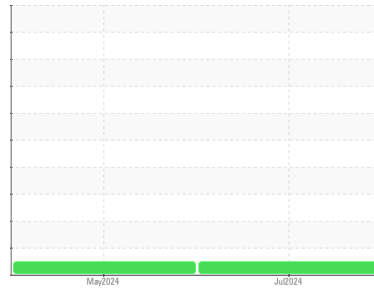

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

| | | | | |
|---------------|-------------|--------------------|-------------|-----|
| Sample Number | Client Info | KOH0000060 | KOH0000015 | --- |
| Sample Date | Client Info | 11 Jul 2024 | 06 May 2024 | --- |
| Machine Age | hrs | Client Info | 582 | 0 |
| Oil Age | hrs | Client Info | 582 | 3 |
| Oil Changed | Client Info | Not Chngd | Not Chngd | --- |
| Sample Status | | NORMAL | NORMAL | --- |

CONTAMINATION method limit/base current history1 history2

| | | | | | |
|-------|-----------|------|------------|-----|-----|
| Water | WC Method | >0.1 | NEG | NEG | --- |
|-------|-----------|------|------------|-----|-----|

WEAR METALS method limit/base current history1 history2

| | | | | | | |
|----------|-----|-------------|------|--------------|----|-----|
| Iron | ppm | ASTM D5185m | >200 | <1 | 0 | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >50 | 0 | 0 | --- |
| Lead | ppm | ASTM D5185m | >50 | 0 | 0 | --- |
| Copper | ppm | ASTM D5185m | >200 | 1 | 3 | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | --- |

ADDITIVES method limit/base current history1 history2

| | | | | | | |
|------------|-----|-------------|------|-------------|------|-----|
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | --- |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | --- |
| Manganese | ppm | ASTM D5185m | | 0 | 1 | --- |
| Magnesium | ppm | ASTM D5185m | 0 | 2 | 0 | --- |
| Calcium | ppm | ASTM D5185m | 80 | 54 | 58 | --- |
| Phosphorus | ppm | ASTM D5185m | 365 | 349 | 349 | --- |
| Zinc | ppm | ASTM D5185m | 500 | 443 | 460 | --- |
| Sulfur | ppm | ASTM D5185m | 1000 | 1033 | 1048 | --- |

CONTAMINANTS method limit/base current history1 history2

| | | | | | | |
|-----------|-----|-------------|-----|--------------|---|-----|
| Silicon | ppm | ASTM D5185m | >50 | <1 | 2 | --- |
| Sodium | ppm | ASTM D5185m | | 1 | 2 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | --- |





FLUID CLEANLINESS method limit/base current history1 history2

| | | | | | |
|-----------------|--------------|-----------|-----------------|----------|-----|
| Particles >4µm | ASTM D7647 | >10000 | 1436 | 1466 | --- |
| Particles >6µm | ASTM D7647 | >2500 | 442 | 322 | --- |
| Particles >14µm | ASTM D7647 | >320 | 39 | 28 | --- |
| Particles >21µm | ASTM D7647 | >80 | 8 | 8 | --- |
| Particles >38µm | ASTM D7647 | >20 | 0 | 0 | --- |
| Particles >71µm | ASTM D7647 | >4 | 0 | 0 | --- |
| Oil Cleanliness | ISO 4406 (c) | >20/18/15 | 18/16/12 | 18/16/12 | --- |

FLUID DEGRADATION method limit/base current history1 history2

| | | | | | | |
|------------------|----------|------------|------|-------------|------|-----|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.38 | 0.44 | 0.45 | --- |
|------------------|----------|------------|------|-------------|------|-----|


OIL ANALYSIS REPORT

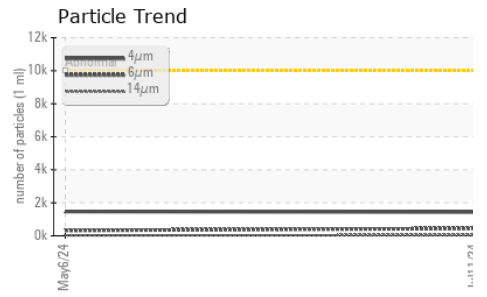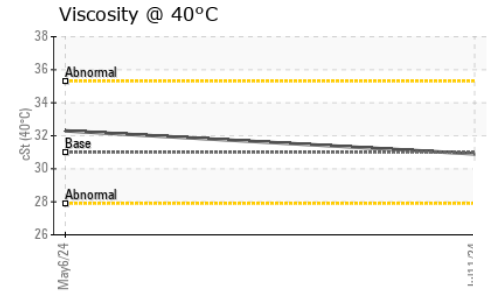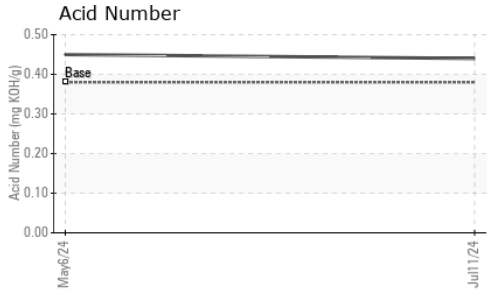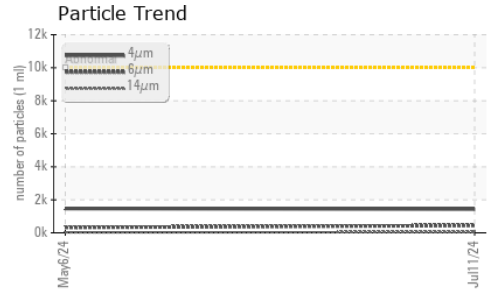






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 40°C | cSt | ASTM D445 | 31.0 | 30.9 | 32.3 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

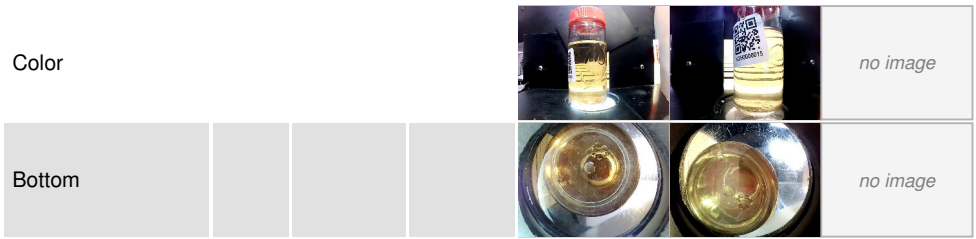

GRAPHS

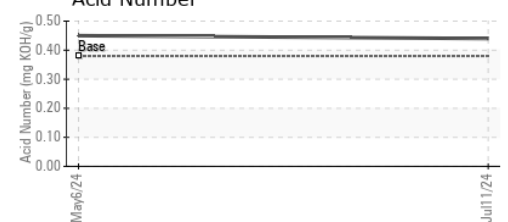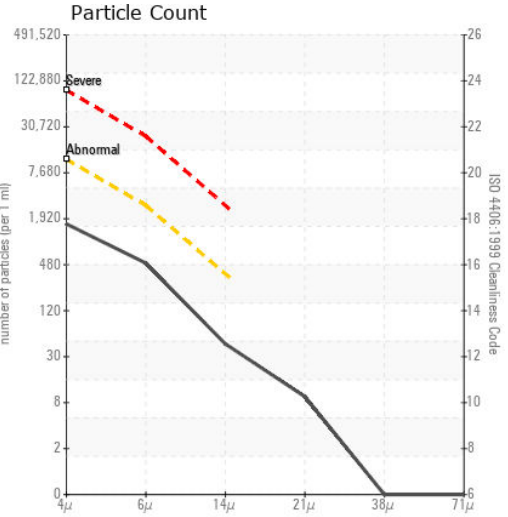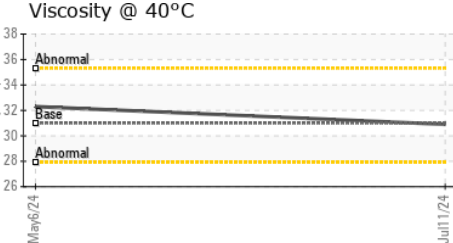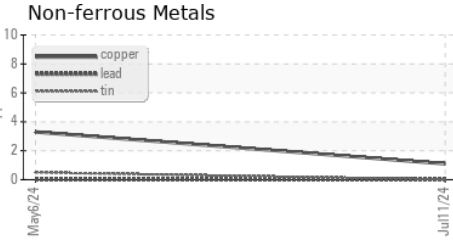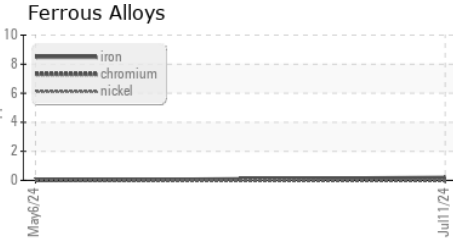

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KOH0000060 **Received** : 17 Jul 2024
Lab Number : **06239102** **Tested** : 18 Jul 2024
Unique Number : 11127936 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests : PrtCount)

KOMATSU HYDRAULICS
 401 E GREENFIELD AVENUE
 MILWAUKEE, WI
 US 53204-2941
 Contact: JOHN GATES
 john.gates@global.komatsu
 T: (414)670-5932
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)